



TESTED HAI. TRUSTED HAI.



SYSTEM ALUMINIUM WINDOWS

TESTED FOR INDIAN HOMES



Totalis – Tested Hai, Trusted Hai

Brought to you by Hindalco Industries Limited, one of the world's foremost aluminium producers and the largest recycler of aluminium globally. As the flagship metals company of the Aditya Birla Group, Hindalco embodies a legacy of innovation, Sustainability, and trusted excellence - ensuring that every Totalis product meets the highest standards of quality and reliability.

Tested and certified

Totalis windows are tested and certified as per global standards to give superior protection from:

-  Cyclonic winds
-  Heaviest of rains
-  Loud noises
-  Dust
-  Air infiltration

Emblem of authenticity

Totalis windows and doors feature a hologram seal that serves as a mark of authenticity, ensuring genuine quality and trusted performance.

Engineered by experts

Totalis windows and doors are expertly engineered and designed by a team of professionals, offering numerous advantages:



High-quality aluminium, for strength and durability




Superior quality rollers, for hassle-free operations & long life



Superior quality locks, for safety and high performance



Limitless colours and textures



Made with recyclable aluminium



Integrated Supply Chain

Why choose Totalis

over untested windows?



Rigorously tested & certified

Totalis windows and doors undergo comprehensive testing for wind, water, and air parameters, matching global standards.



Superior strength & durability

Crafted from premium-grade aluminium extrusions by Hindalco.



Exceptional design

Our value-engineered products are meticulously designed to provide the best-in-class experience, ensuring both functionality and aesthetic appeal.



Mark of authenticity

Totalis windows and doors are equipped with authenticity holograms, serving as a visible proof of their genuine quality and origin.



Effortless operation

Factory-made and extensively tested for smooth and hassle-free operation.

Why choose Totalis

over non-aluminium windows?



Unparalleled strength

Manufactured from Hindalco's high-quality aluminium extrusions, providing unmatched strength as compared to other material windows.



Superior performance and high durability

Protection against diverse weather conditions like high winds, heavy rains, and extreme temperatures.



Sleek aesthetic

Sleek and modern appearance, enhancing the overall aesthetic of your space.



Low maintenance

Resistant to rust, corrosion, and termite infestations, eliminating the need for frequent painting or staining.



Environmentally sustainable

Highly sustainable, since aluminium is an eternally recyclable material.



Versatile design options


Wide range of colours, finishes, and hardware choices, enabling to create a unique and personalised look for your space.



**Elevate your home with
Totalis System Aluminium Windows**

Sliding series

TOT-SD NEX GEN

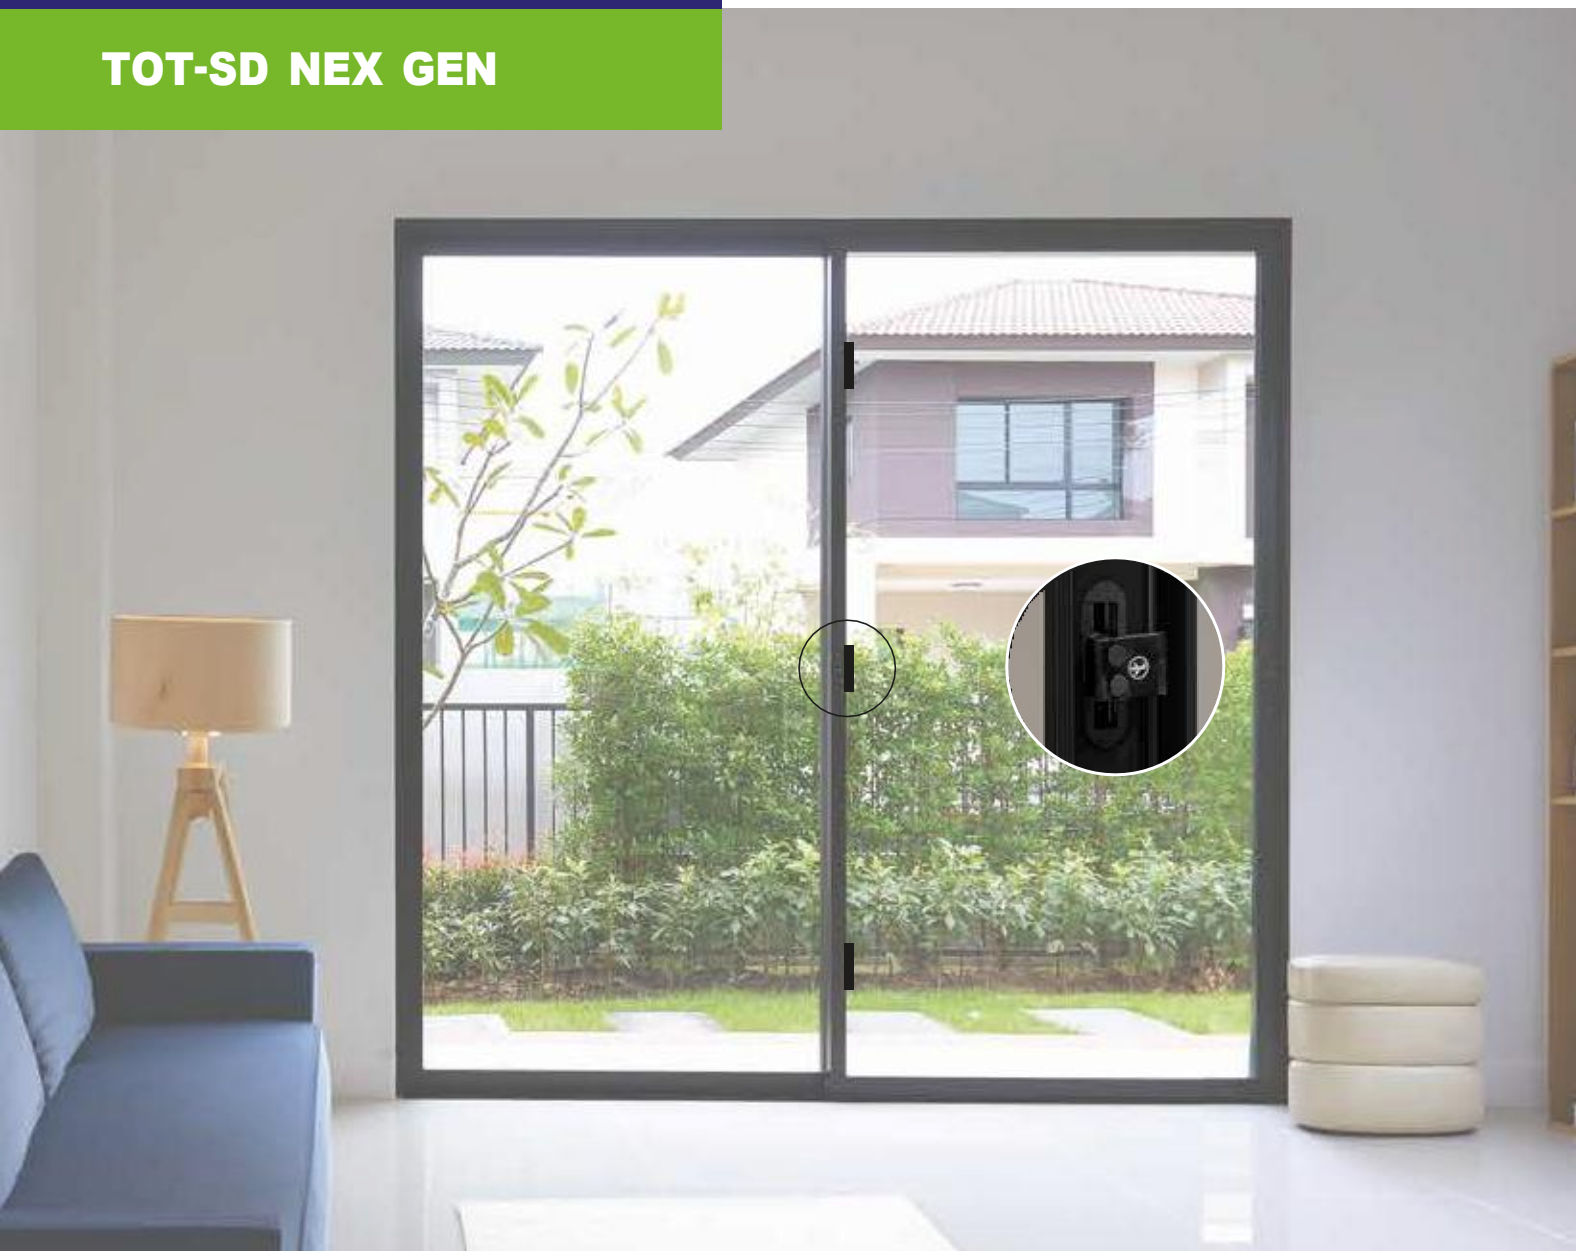

Product specifications

Max sash height (mm): 2400

Max sash width (mm): 1050

Glass range (mm): 5 – 8

Performance parameters

Wind load: 1.6 kpa

As per class 4A (BS EN12210 : 2000)


Air tightness: 450 Pa

As per class 2 (BS EN12207 : 2000)


Water tightness: 250 Pa

As per class 4A (BS EN12207 : 2000)


Popular typologies




2T+2G SHUTTER SLIDING WINDOW

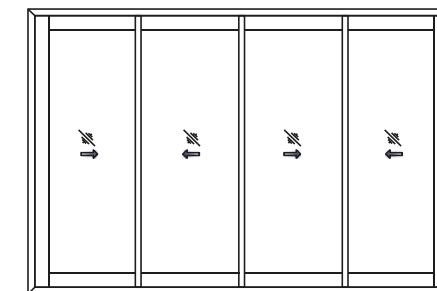


2T+4G SHUTTER SLIDING WINDOW



2T+2 SHUTTER SLIDING 1 SHUTTER FIXED WINDOW




2T+2G SHUTTER 1 MESH SHUTTER SLIDING WINDOW

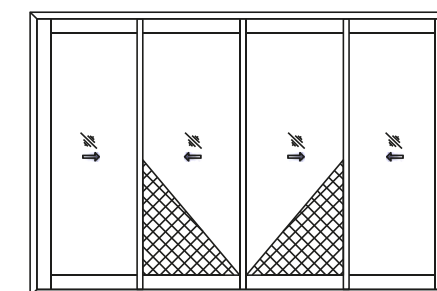


2T+4G SHUTTER 2 MESH SHUTTER SLIDING WINDOW



3T+3G SHUTTER SLIDING WINDOW

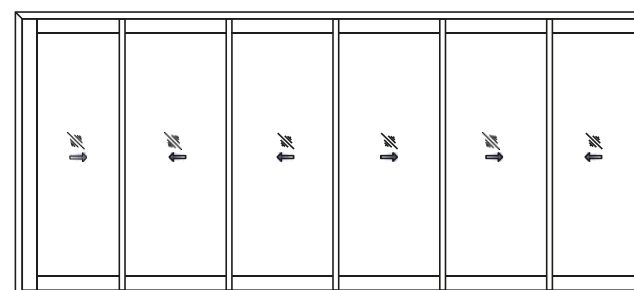


3T+6G SHUTTER SLIDING WINDOW



2T+2G SHUTTER SLIDING + TOP FIXED WINDOW



2T+2G SHUTTER SLIDING + BOTTOM FIXED WINDOW

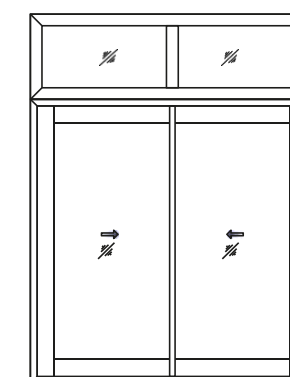

2T+2G SHUTTER SLIDING + TOP FIXED WITH CENTER MULLION WINDOW



2T+2G SHUTTER SLIDING + BOTTOM FIXED WITH CENTER MULLION WINDOW

Sliding series

TOT-SD NEX GEN PLUS

Launching Soon



Product specifications

Max sash height (mm): 2743

Max sash width (mm): 1069

Glass range (mm): Upto 24

Performance parameters

Wind load: 2.5 kpa

As per class 4A (BS EN12210 : 2000)


Air tightness: 450 Pa

As per class 2 (BS EN12207 : 2000)


Water tightness: 300 Pa

As per class 4A (BS EN12207 : 2000)


Popular typologies




2T+2G SHUTTER SLIDING WINDOW

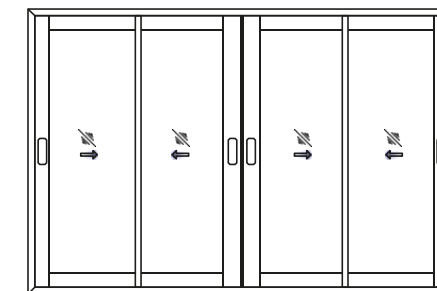


2T+4G SHUTTER SLIDING WINDOW

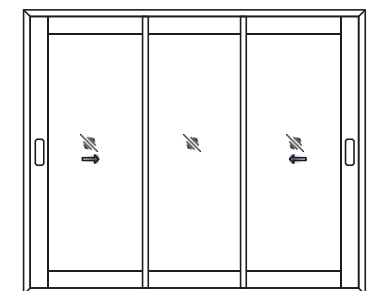


2T+2 SHUTTER SLIDING 1 SHUTTER FIXED WINDOW




3T+2G SHUTTER 1 MESH SHUTTER SLIDING WINDOW

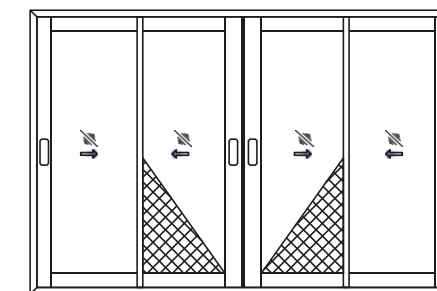


3T+4G SHUTTER 2 MESH SHUTTER SLIDING WINDOW

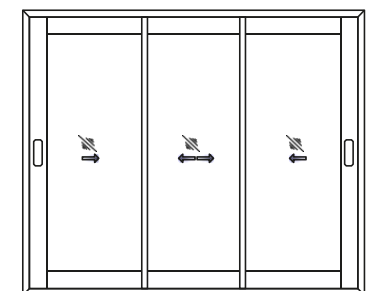

3T+3G SHUTTER SLIDING WINDOW

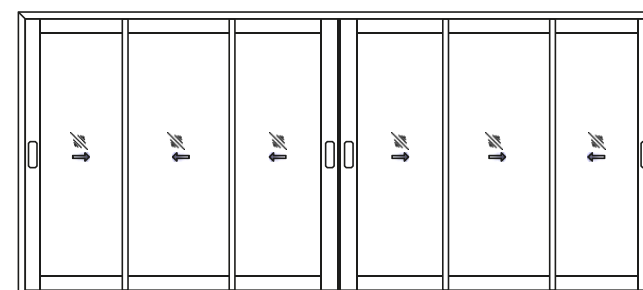


3T+6G SHUTTER SLIDING WINDOW

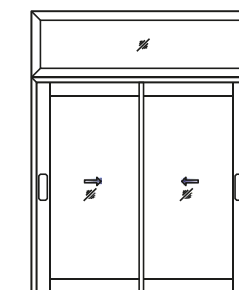


2T+2G SHUTTER SLIDING + TOP FIXED WINDOW



2T+2G SHUTTER SLIDING + BOTTOM FIXED WINDOW

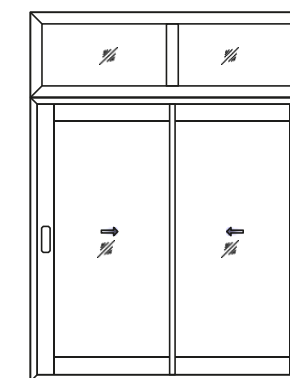

2T+2G SHUTTER SLIDING + TOP FIXED WITH CENTER MULLION WINDOW

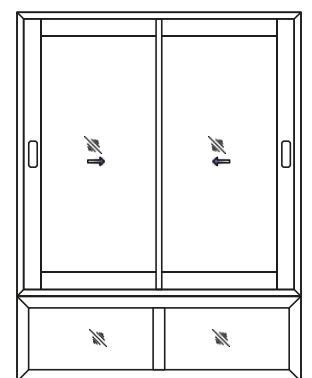

2T+2G SHUTTER SLIDING + BOTTOM FIXED WITH CENTER MULLION WINDOW

Sliding series

TOT-SD LITE



Product specifications

Max sash height (mm): 1500

Max sash width (mm): 800

Glass range (mm): 5 – 6

Performance parameters

Wind load: 1.6 kpa

As per class 4A (BS EN12210 : 2000)


Air tightness: 150 Pa

As per class 2 (BS EN12207 : 2000)


Water tightness: 150 Pa

As per class 4A (BS EN12207 : 2000)


Popular typologies




2T+2G SHUTTER SLIDING WINDOW

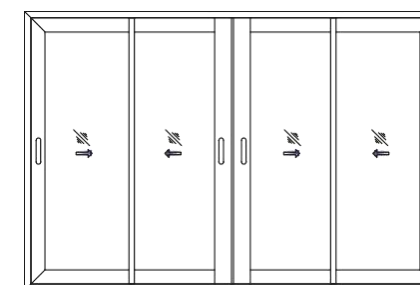


2T+4G SHUTTER SLIDING WINDOW




2T+2G SHUTTER SLIDING + TOP FIXED WINDOW




3T+2G SHUTTER 1 MESH SHUTTER SLIDING WINDOW

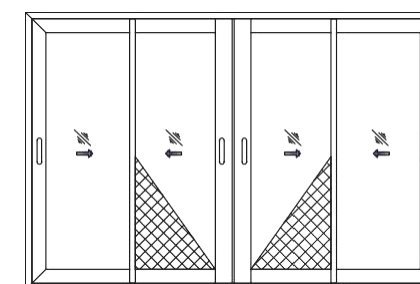


3T+ 4G SHUTTER 2 MESH SHUTTER SLIDING WINDOW

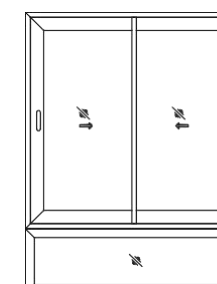


2T+2G SHUTTER SLIDING + BOTTOM FIXED WINDOW




2T+2 SHUTTER SLIDING 1 SHUTTER FIXED WINDOW




3T+3G SHUTTER SLIDING WINDOW



2T+2G SHUTTER SLIDING + TOP FIXED WITH CENTER MULLION WINDOW

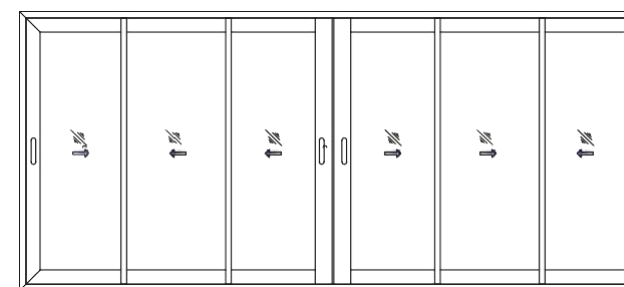


3T+6G SHUTTER SLIDING WINDOW

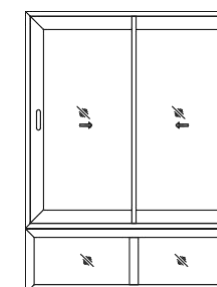

2T+2G SHUTTER SLIDING + BOTTOM FIXED WITH CENTER MULLION WINDOW

Sliding series

TOT-SD PLUS

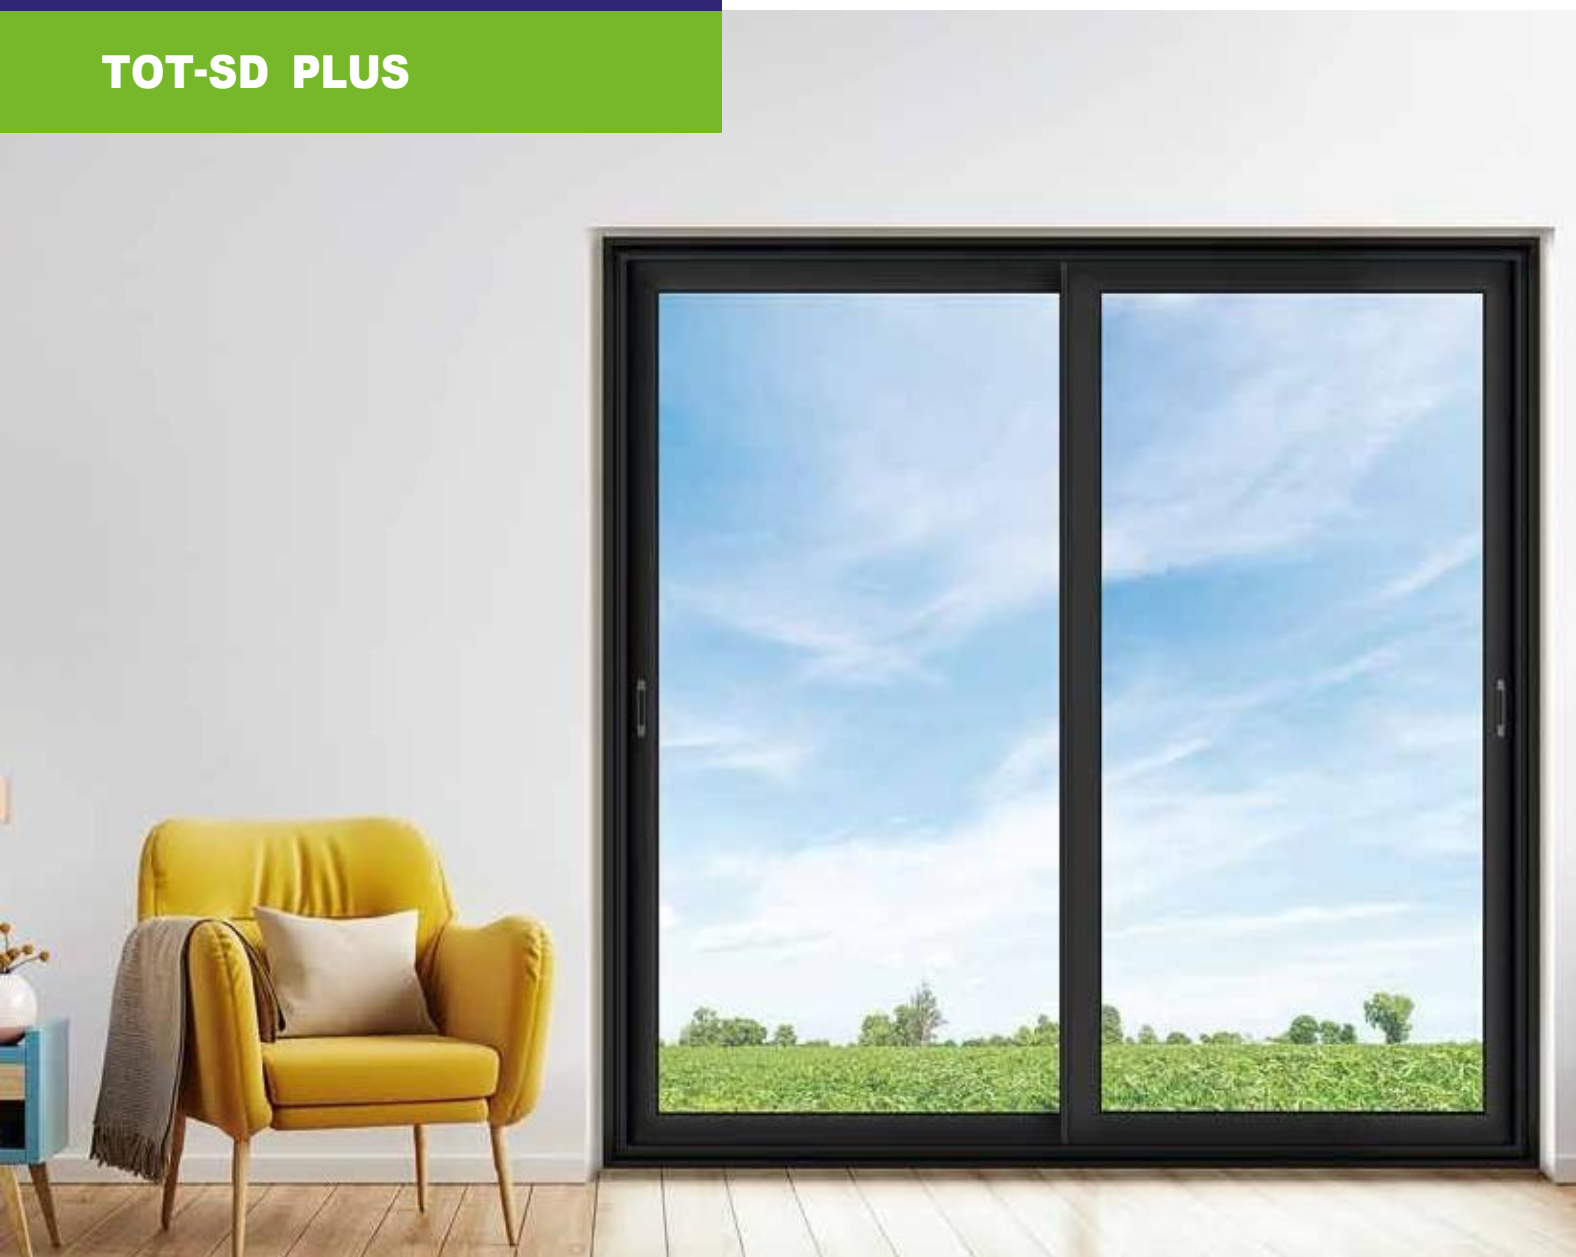

Product specifications

Max sash height (mm): 2400

Max sash width (mm): 1200

Glass range (mm): 5 – 20

Performance parameters

Wind load: 2 kpa

As per class C5 (BS EN12210 : 2000)


Air tightness: 300 Pa

As per class 2 (BS EN12207 : 2000)


Water tightness: 150 Pa

As per class 4A (BS EN12207 : 2000)

Popular typologies




2T+2G SHUTTER SLIDING WINDOW

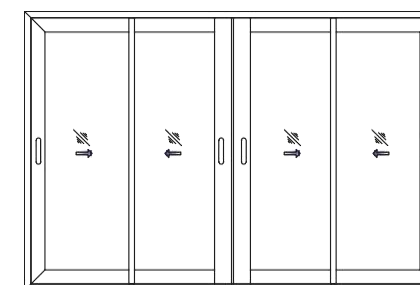


2T+4G SHUTTER SLIDING WINDOW




2T+2G SHUTTER SLIDING + TOP FIXED WINDOW

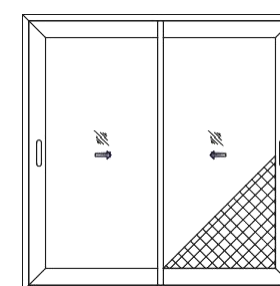


3T+2G SHUTTER 1 MESH SHUTTER SLIDING WINDOW

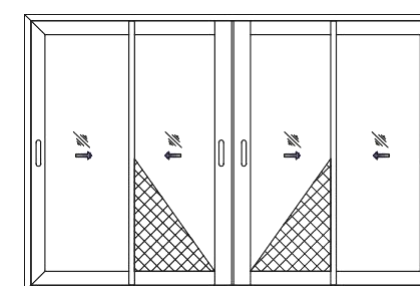


3T+ 4G SHUTTER 2 MESH SHUTTER SLIDING WINDOW




2T+2G SHUTTER SLIDING + BOTTOM FIXED WINDOW




2T+2 SHUTTER SLIDING 1 SHUTTER FIXED WINDOW




3T+3G SHUTTER SLIDING WINDOW



2T+2G SHUTTER SLIDING + TOP FIXED WITH CENTER MULLION WINDOW

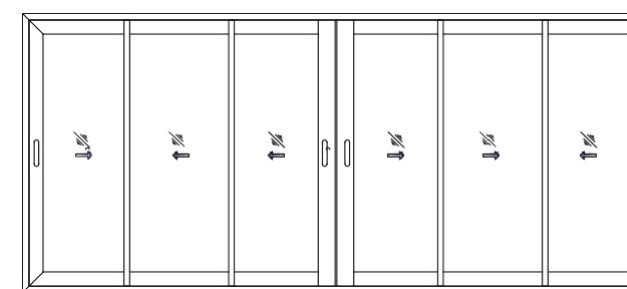

3T+6G SHUTTER SLIDING WINDOW



2T+2G SHUTTER SLIDING + BOTTOM FIXED WITH CENTER MULLION WINDOW

Casement series

TOT-CS



Product specifications

Max sash height (mm):
Door – 2400, Window – 1500

Max sash width (mm):
Door – 900, Window – 750

Glass range (mm): 5 – 20


Performance parameters

Wind load: 1.6 kpa
As per class 4C (BS EN12210 : 2000)


Air tightness: 150 Pa
As per class 2 (BS EN12207 : 2000)

Water tightness: 150 Pa
As per class 4A (BS EN12207 : 2000)


Popular typologies

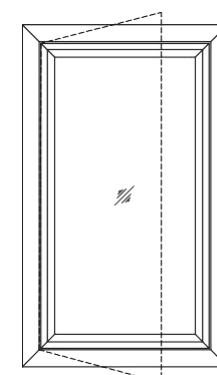


SINGLE SHUTTER OUTSIDE
OPENING SIDE HUNG WINDOW

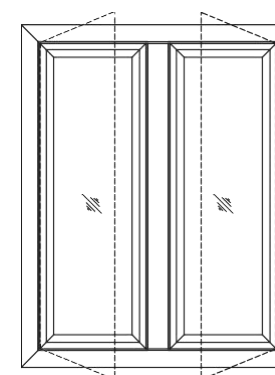


DOUBLE SHUTTER OUTSIDE
OPENING SIDE HUNG WINDOW

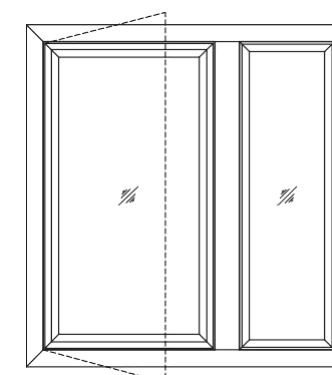


SINGLE SHUTTER OUTSIDE OPENING
SIDE HUNG + SIDE FIX WINDOW

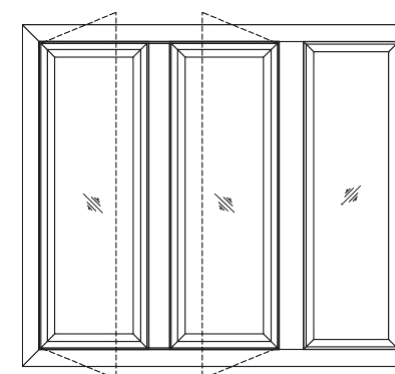


DOUBLE SHUTTER OUTSIDE OPENING
SIDE HUNG + SIDE FIX WINDOW

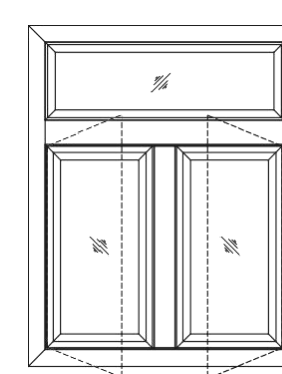


DOUBLE SHUTTER OUTSIDE OPENING
SIDE HUNG + TOP FIX WINDOW

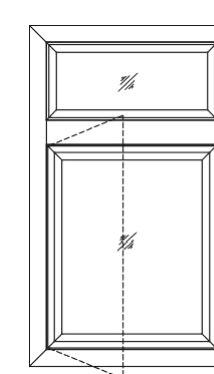


SINGLE SHUTTER OUTSIDE OPENING
SIDE HUNG + TOP FIX WINDOW

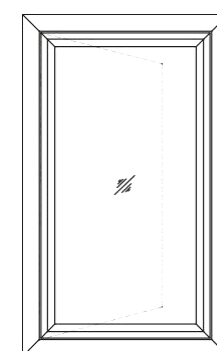


SINGLE SHUTTER INSIDE
OPENING SIDE HUNG WINDOW

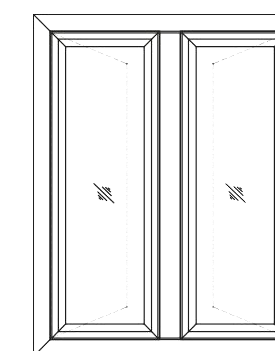


DOUBLE SHUTTER INSIDE
OPENING SIDE HUNG WINDOW

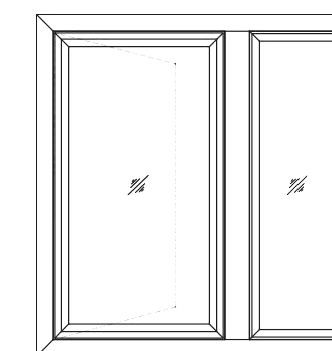


SINGLE SHUTTER INSIDE OPENING
SIDE HUNG + SIDE FIX WINDOW

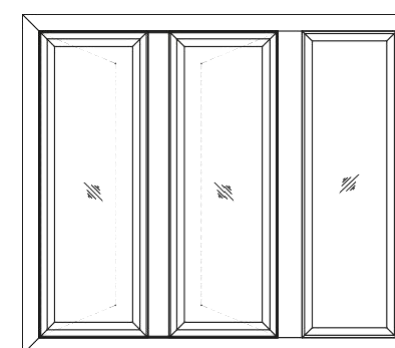

DOUBLE SHUTTER INSIDE OPENING
SIDE HUNG + SIDE FIX WINDOW




DOUBLE SHUTTER INSIDE OPENING
SIDE HUNG + TOP FIX WINDOW



SINGLE SHUTTER INSIDE OPENING
SIDE HUNG + TOP FIX WINDOW

Casement series

TOT CS Plus

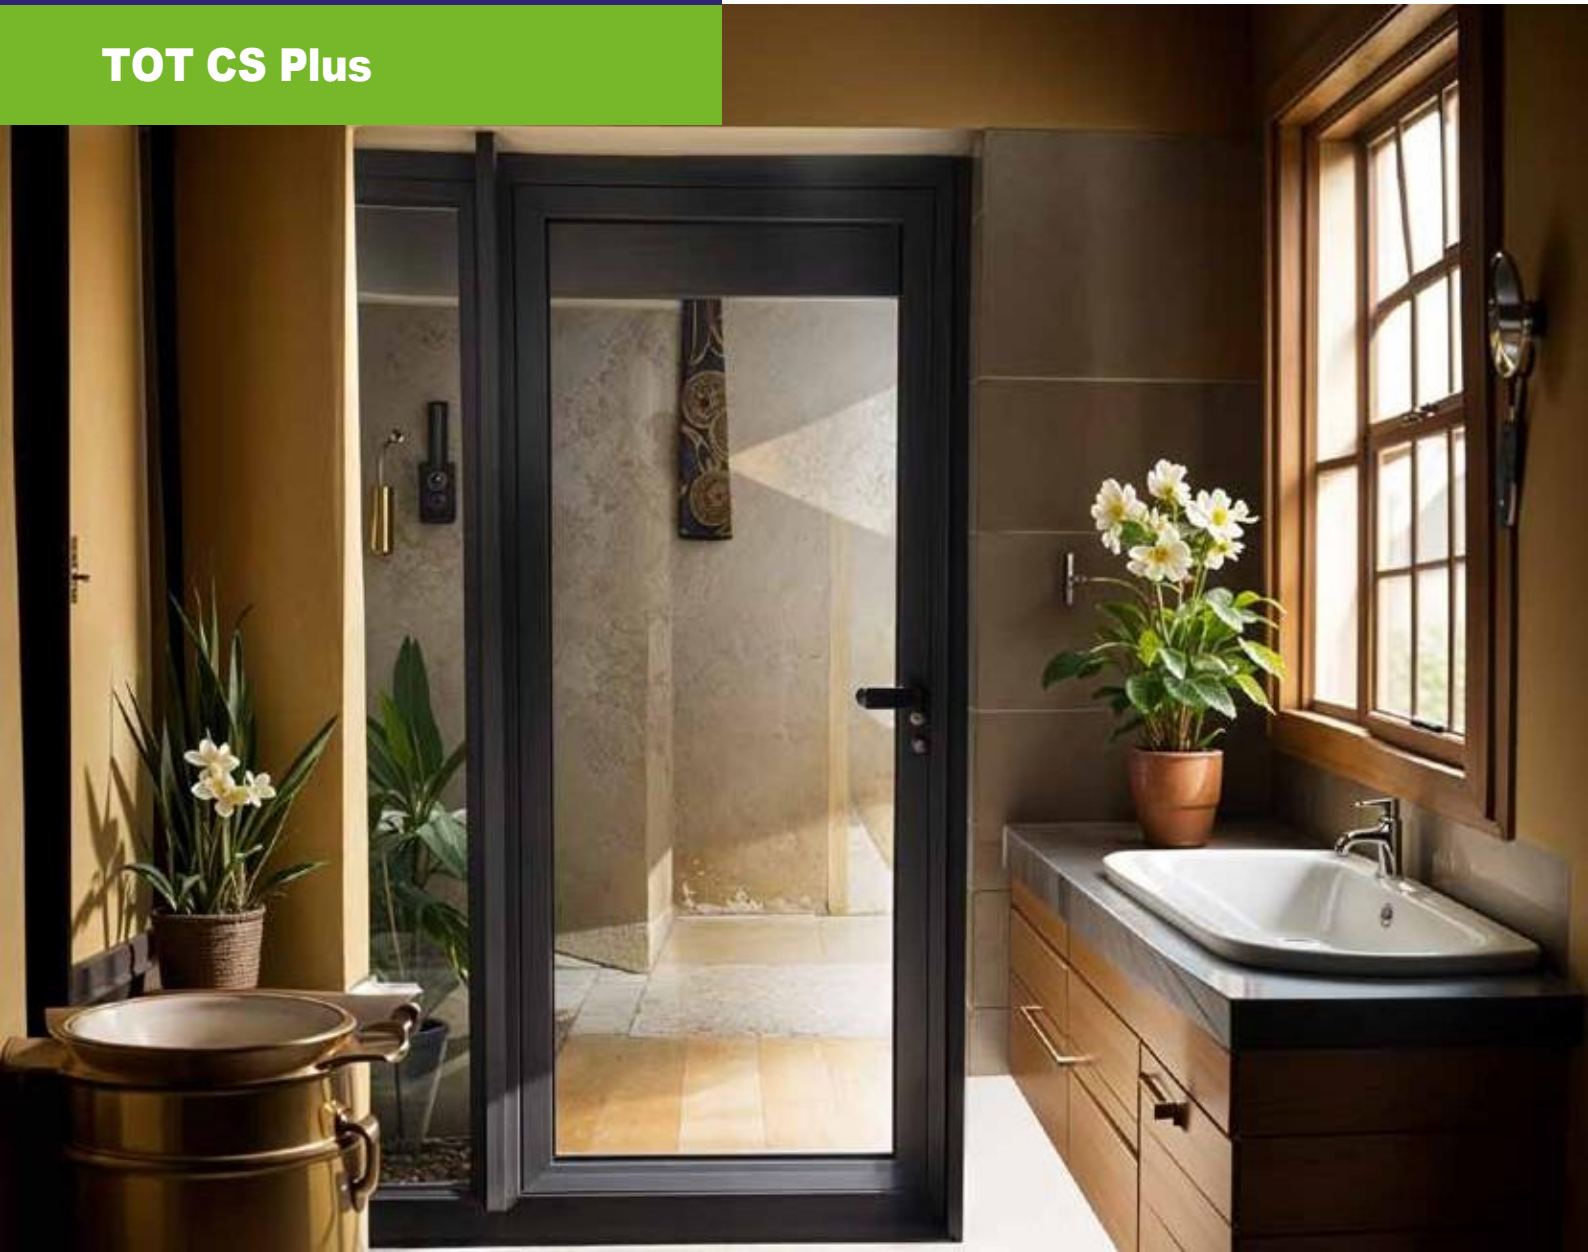


Product specifications

- Max sash height (mm):
Door – 2700, Window – 2000
- Max sash width (mm):
Door – 900, Window – 900
- Glass range (mm): 6 – 24


Performance parameters

- Wind load: 2.0 kpa
As per class C5 (BS EN12210 : 2000)
- Air tightness: 300 Pa
As per class 2 (BS EN12207 : 2000)
- Water tightness: 300 Pa
As per class 7A (BS EN12207 : 2000)


Popular typologies

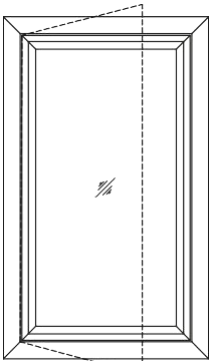


SINGLE SHUTTER OUTSIDE
OPENING SIDE HUNG WINDOW

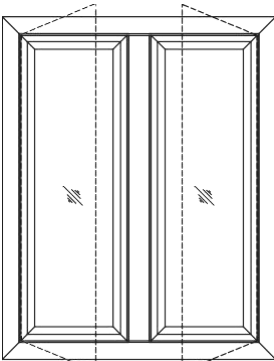


DOUBLE SHUTTER OUTSIDE
OPENING SIDE HUNG WINDOW

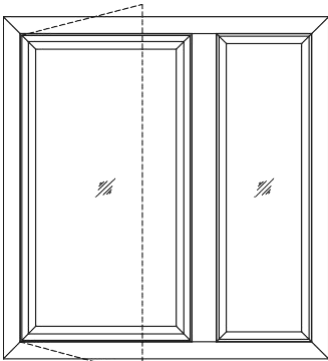


SINGLE SHUTTER OUTSIDE OPENING
SIDE HUNG + SIDE FIX WINDOW

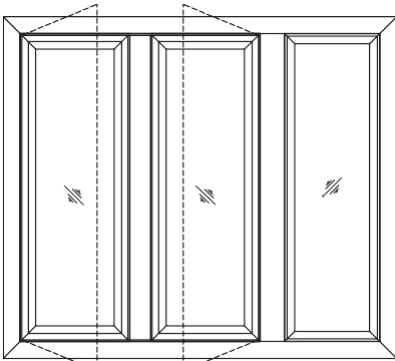


DOUBLE SHUTTER OUTSIDE OPENING
SIDE HUNG + SIDE FIX WINDOW

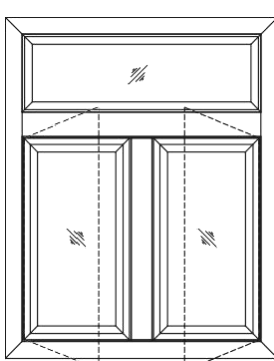


DOUBLE SHUTTER OUTSIDE OPENING
SIDE HUNG + TOP FIX WINDOW

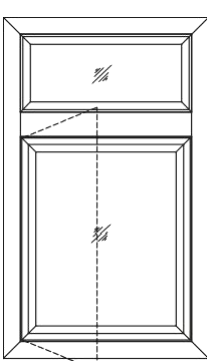


SINGLE SHUTTER OUTSIDE OPENING
SIDEHUNG + TOP FIX WINDOW




SINGLE SHUTTER INSIDE
OPENING SIDE HUNG WINDOW




DOUBLE SHUTTER INSIDE
OPENING SIDE HUNG WINDOW




SINGLE SHUTTER INSIDE OPENING
SIDE HUNG + SIDE FIX WINDOW

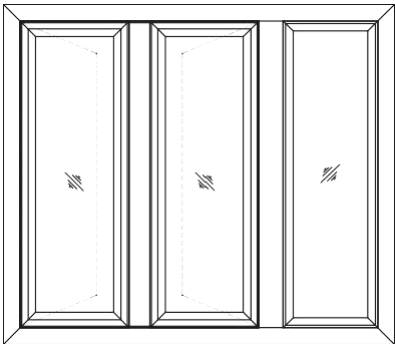

DOUBLE SHUTTER INSIDE OPENING
SIDE HUNG + SIDE FIX WINDOW



DOUBLE SHUTTER INSIDE OPENING
SIDE HUNG + TOP FIX WINDOW



SINGLE SHUTTER INSIDE OPENING
SIDEHUNG + TOP FIX WINDOW

Railing

TOT RL 80



Product specifications

Max. height (mm): 1000

Glass thickness (mm): 11.52, 12.52, 13.52

Anchor specifications (mm):

HUSA – CR M10 x 105

(Counter Sunk Head)

Anchor spacing: 300 mm

Performance parameters


Wind load: 1.5 KPA

Live load: 0.75 KN/m

Point load: 0.50 KN/m

Shot bag impact Test: 45.4 Kg
at 1525 mm height

Section Diagram

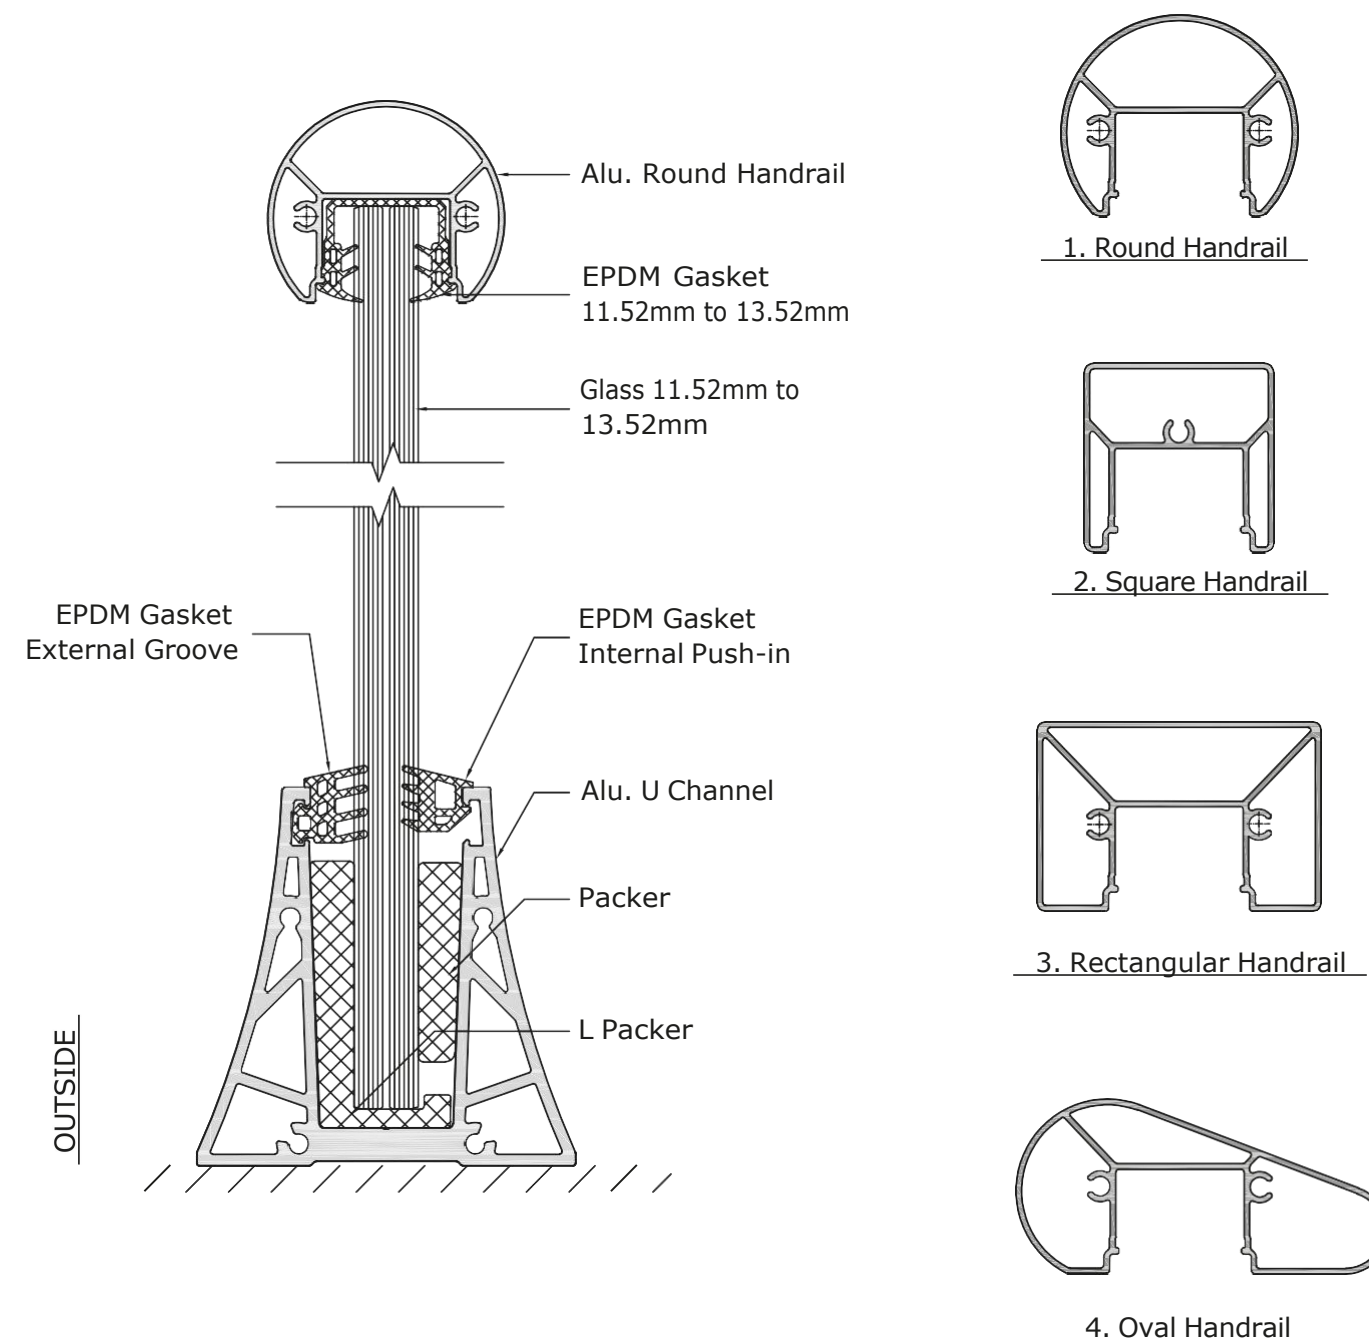

Railing

TOT RL 125



Product specifications

Max. height (mm): 1200

Glass thickness (mm): 13.52, 15.52, 17.52

Anchor specifications (mm):

HUSA – HR M10 x 105
(Hexagonal Head)

Anchor spacing: 220 mm

Performance parameters


Wind load: 2.0 KPA

Live load: 0.75 KN/m

Point load: 0.50 KN/m

Shot bag impact Test: 45.4 Kg at
1525 mm height

Section Diagram

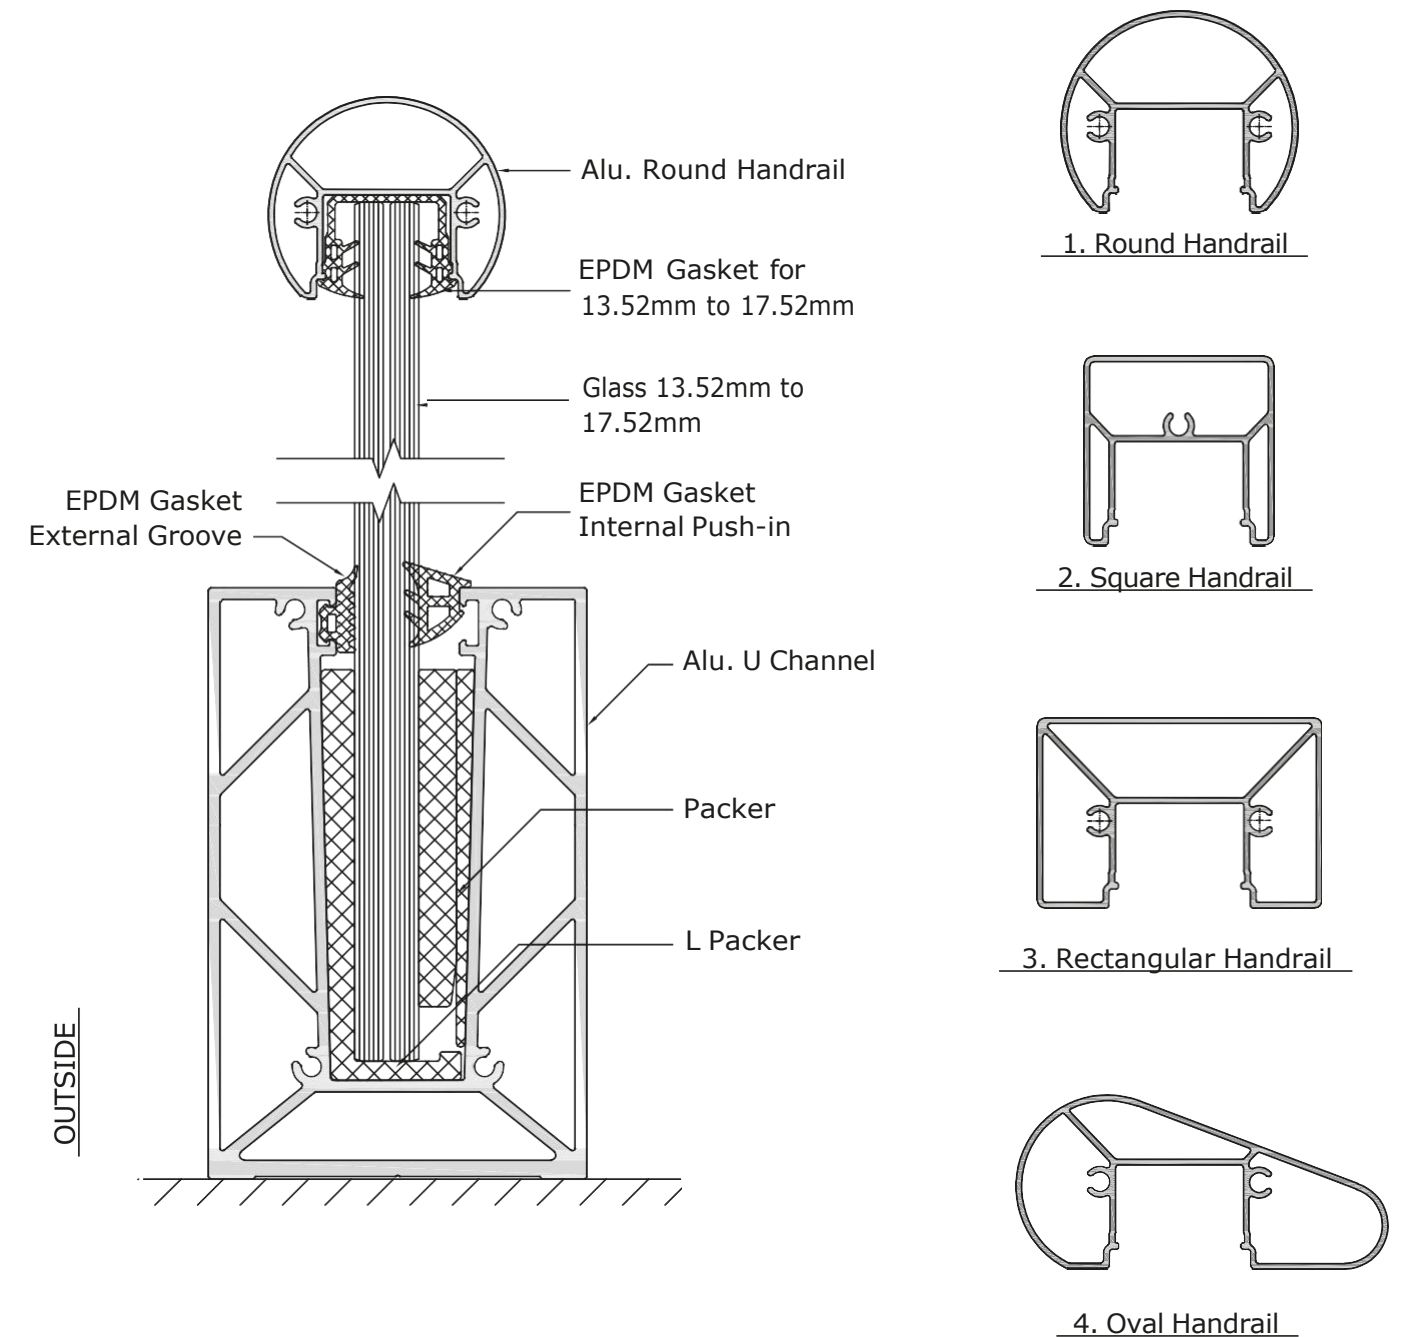




TOTALIS

By HINDALCO⁺⁺

TESTED HAI. TRUSTED HAI.

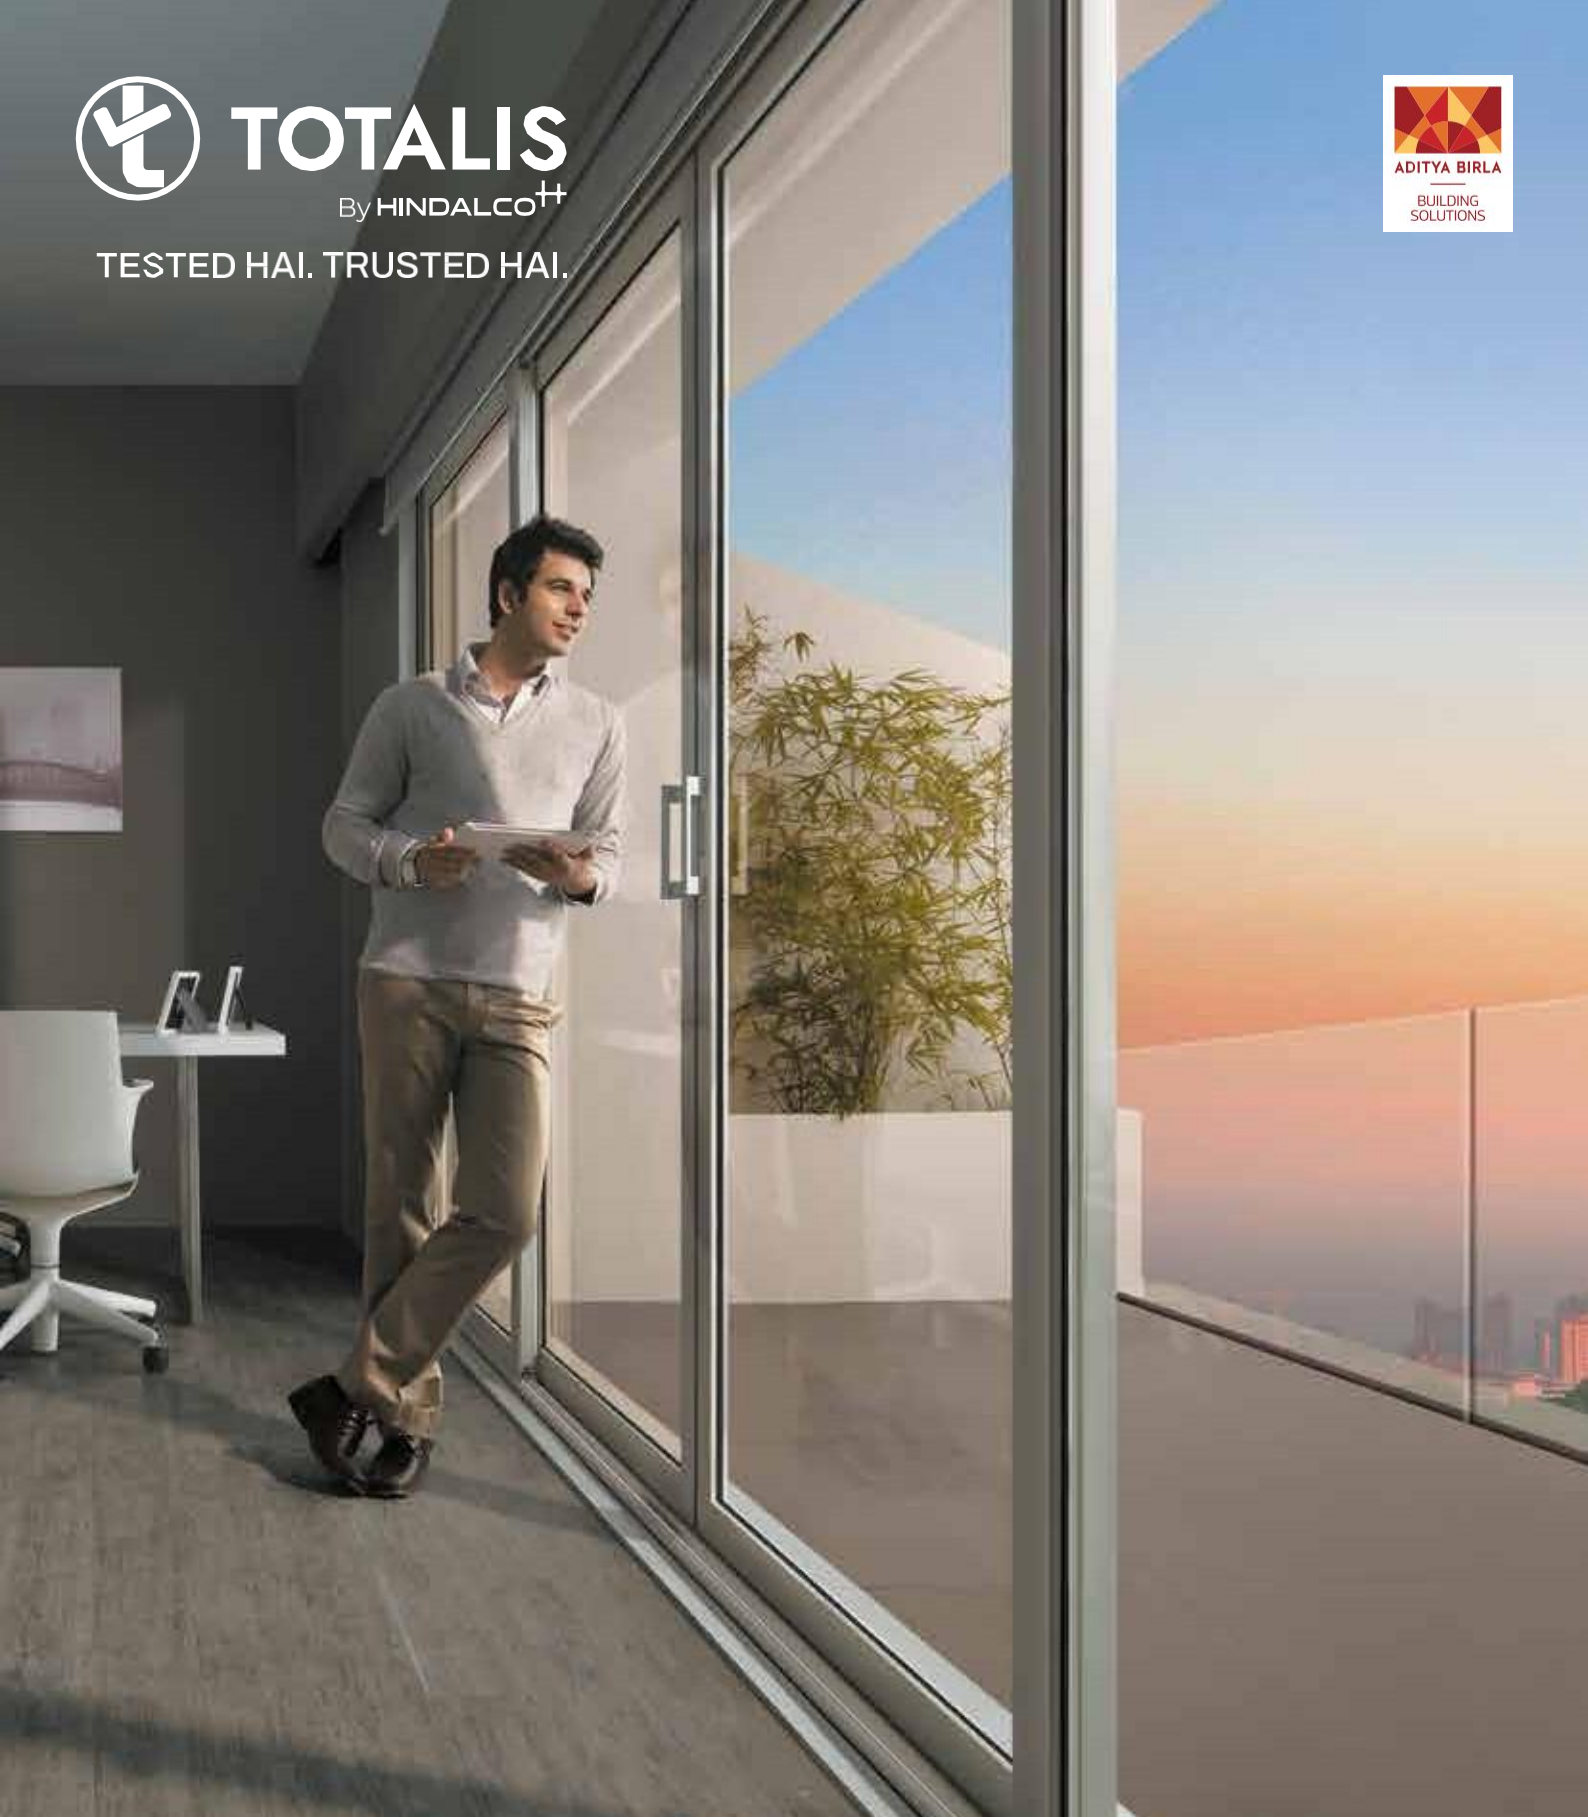

SHOWROOM ADDRESS:

KACA HAUS PVT. LTD - Totalis
2nd Floor, Flat - 210, Bhavyasri Arcade,
Erragadda, Hyderabad, Telangana-500038.
Tel: 9182726708, 8522835720.

E-MAIL: kacahaus.info@gmail.com

Disclaimer: Fabrication & installation of the product is the sole responsibility of the fabricator. Hindalco supplies tested and certified extrusion and hardware components.