SPAN/RSPAN

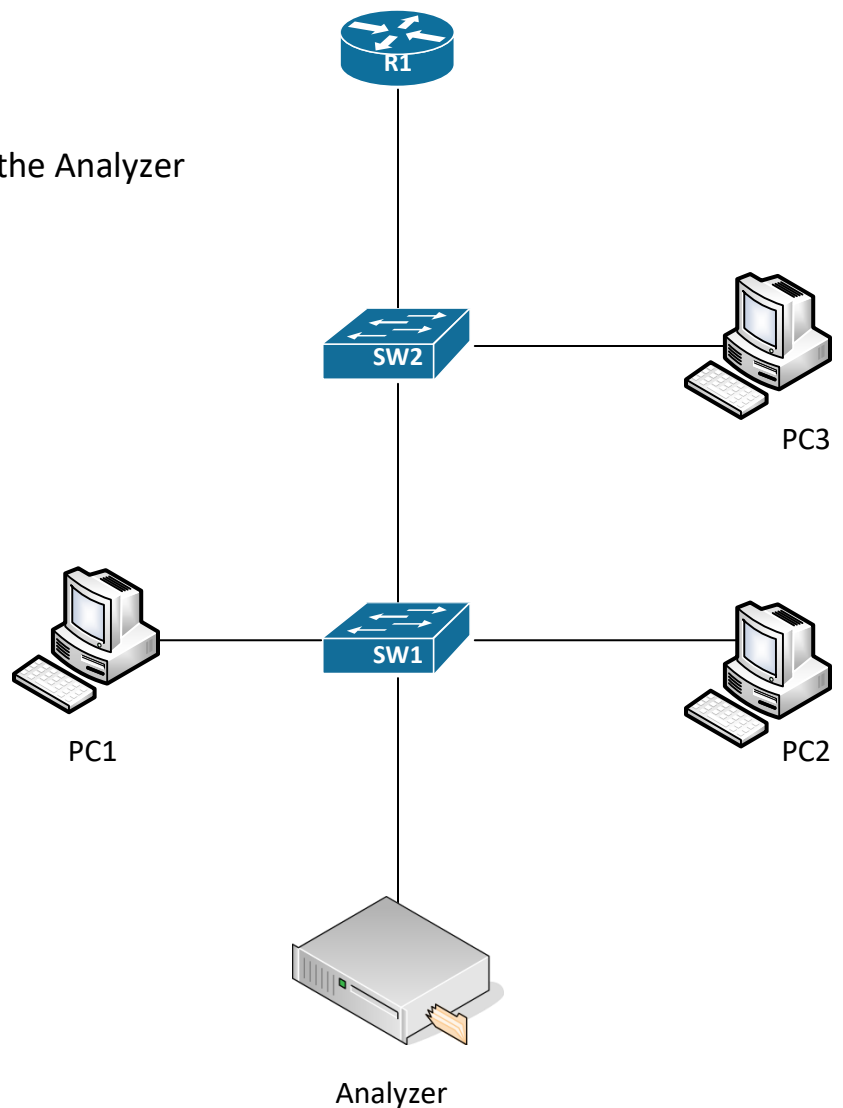**By: Kadeem O'Gilvie**

Local SPAN:

Configure DHCP on R1
Confirm hosts receive an IP address
Only allow active VLANs on the trunk links
Disable gratuitous ARP on R1
Configure SPAN on SW1
Capture RX/TX traffic from PC1 and PC2
Captured traffic should be forwarded to the Analyzer
Confirm configuration using Wireshark

RSPAN:

Capture traffic from PC3 and forward it to the Analyzer
Confirm configuration using Wireshark

10.123.1.0/24
VLAN 123