



Fig. 8: Wearable Device Architecture — Embedded vs FPGA Implementation

Track A: Embedded (ARM Cortex-M4F)

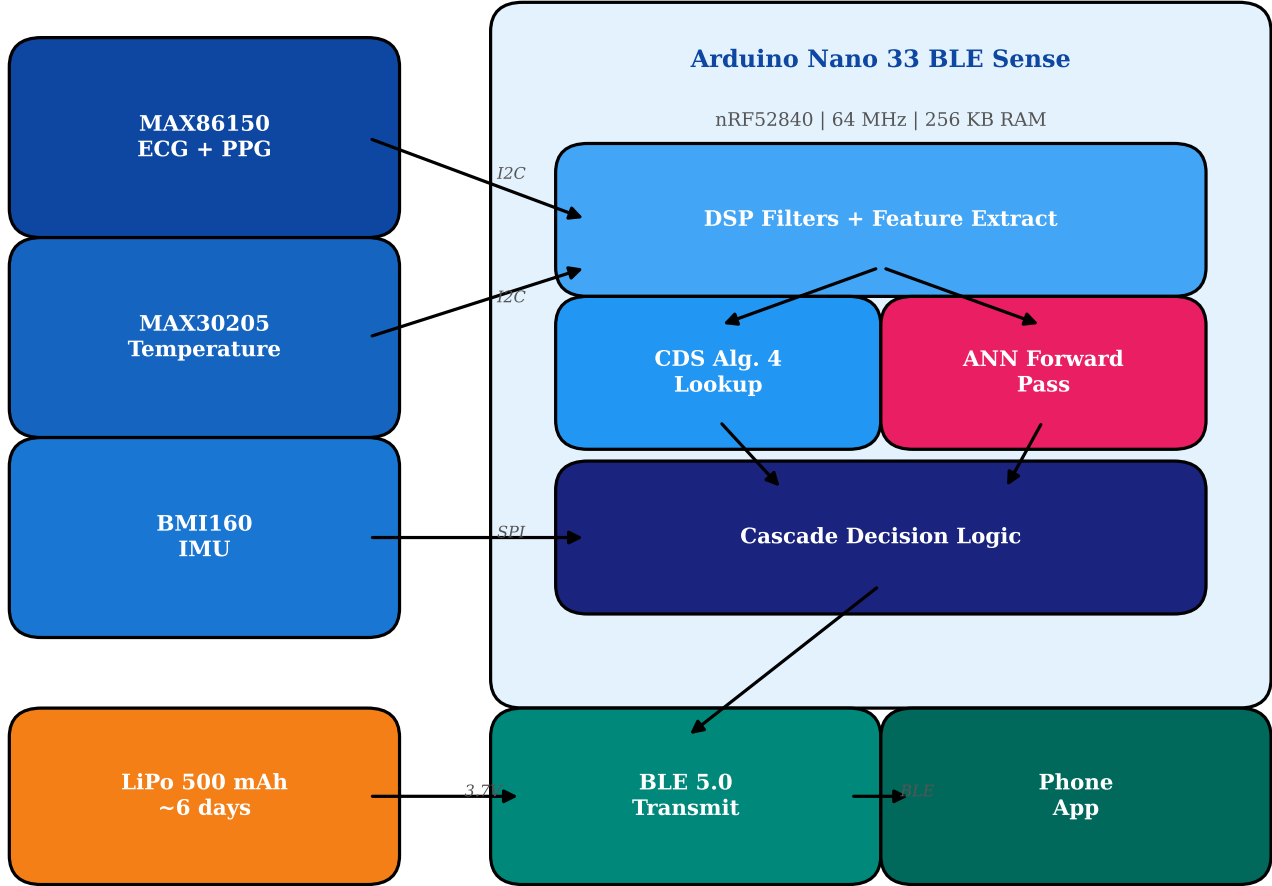

Latency: ~1 ms | Power: ~3.5 mA | BOM: ~\$70

Track B: FPGA (Parallel Hardware)

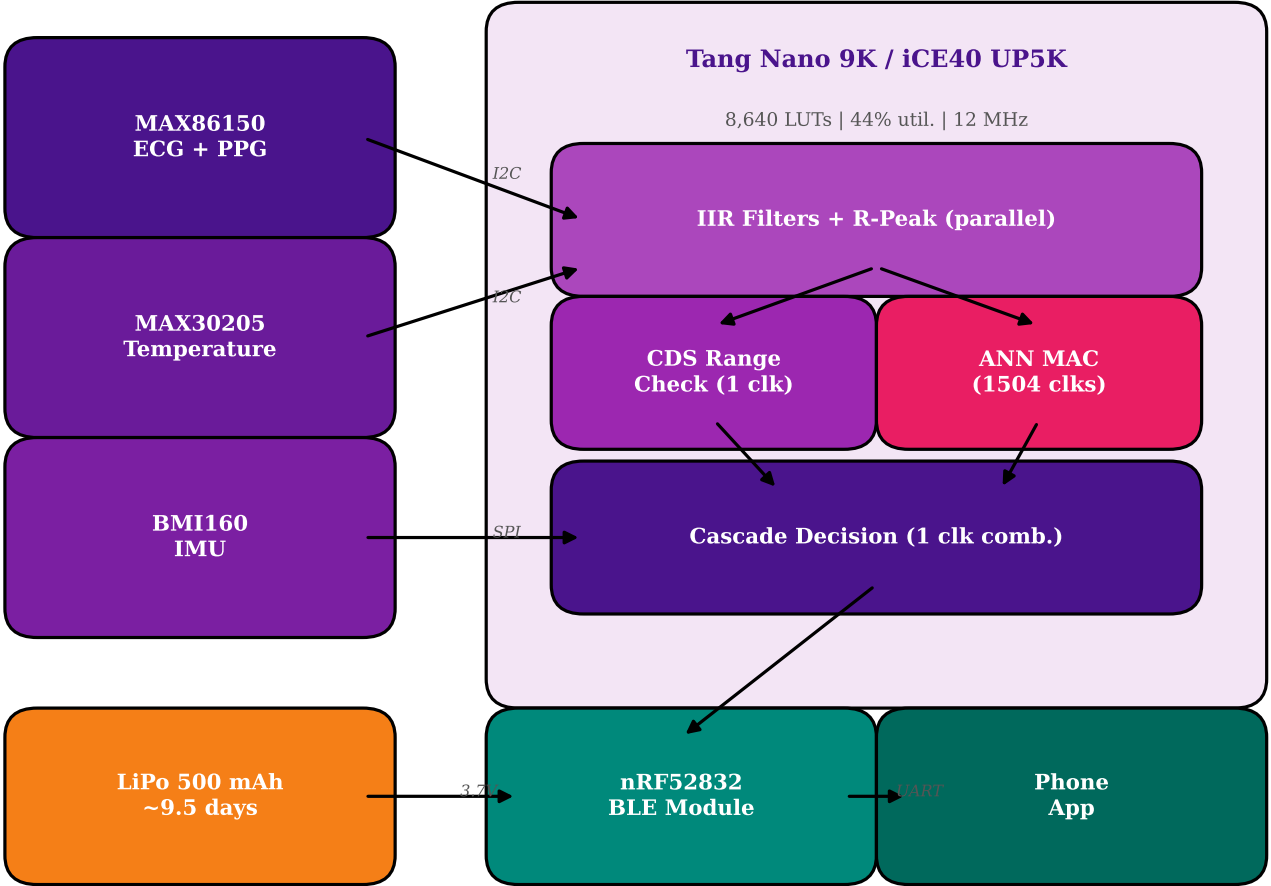

Latency: ~128 us | Power: ~2.2 mA | BOM: ~\$66