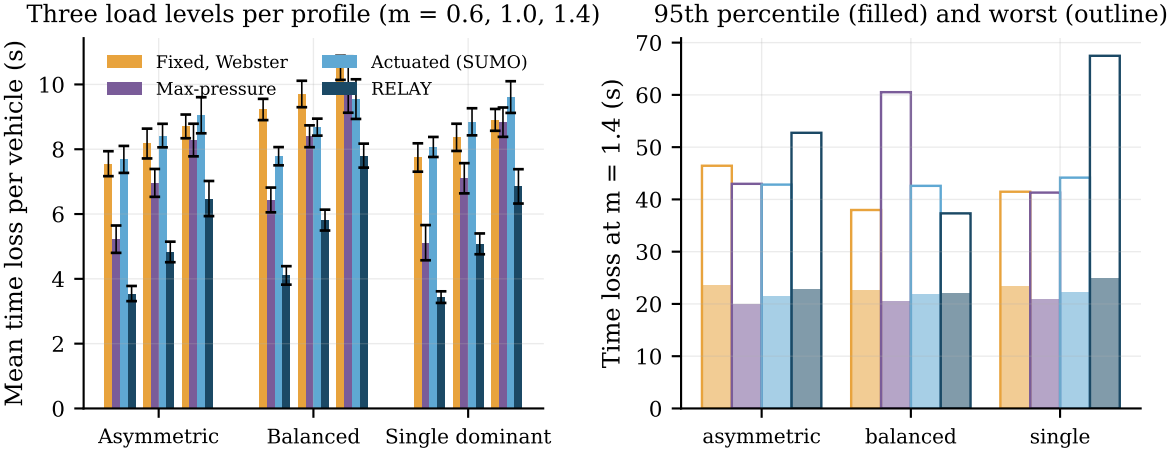
Three load levels per profile (m = 0.6, 1.0, 1.4)
Mean time loss per vehicle (s)
Fixed, Webster
Actuated (SUMO)
Max-pressure
RELAY
0
2
4
6
8
10
Asymmetric
Balanced
Single dominant
95th percentile (filled) and worst (outline)
Time loss at m = 1.4 (s)
0
10
20
30
40
50
60
70
asymmetric
balanced
single