Broken-Stitch Detection on Unseen Fabrics: Group-Based Testing, Edge Fusion, and Grad-CAM Analysis

***Abstract*—A broken stitch can look different on different fabrics. A model that works well on familiar fabrics may fail on a new fabric. We study this problem using 3,637 normal and broken-stitch images from StitchingNet. We keep each fabric group out of training in one of five test folds. With StitchingNet fine-tuning, MobileNetV3 reaches 0.7969 macro-F1 from ImageNet initialization and 0.8089 after additional pretraining on edited stitch images. However, performance changes sharply across fabric groups. We also test two ways to improve the model. The Sobel edge-fusion model reaches 0.8082 macro-F1. In a controlled training-duration experiment, the edited-stitch-initialized model drops from 0.8075 at six epochs to 0.7948 at 30 epochs. We use Grad-CAM to study selected cases where models make different decisions. A separate split audit reveals the effect of grouping related augmented images. Fabric changes remain difficult; these results do not establish performance in independent factories.**

***Index Terms*—broken-stitch detection, garment inspection, unseen fabrics, group-based testing, MobileNetV3, Grad-CAM**

I. Introduction

Garment factories need to find broken stitches before they ship a product. A broken stitch interrupts a line of thread, but its appearance changes with fabric texture, thread color, and lighting. Some fabric patterns can also look like damaged stitches. These changes make automated inspection difficult: a model may work well on fabrics it has seen during training but make mistakes on a new fabric. We study this problem as *binary broken-stitch classification on unseen fabric groups*. Given an RGB stitch image x from fabric group g, the model predicts normal stitching ($y = 0$) or a broken stitch ($y = 1$). Our main goal is to measure how well it makes this decision when all images from group g are excluded from training.

Earlier studies have used CNN features, image processing, and pretrained networks to detect stitch defects [2]–[4]. They show that image models can recognize many sewing defects. However, some evaluations use fabric or thread settings that also appear in training. Good scores under those conditions do not necessarily mean that a model will work well on an unseen fabric. Related augmented images can also enter different random splits and make a test score less reliable [5]–[7]. Even when we avoid these overlaps, it is unclear whether extra pretraining, longer training, or a separate edge branch improves performance across fabrics. Overall accuracy also hides missed defects and false alarms, while an attention heatmap does not by itself confirm where a defect lies. These issues motivate an evaluation that tests both model performance and its limits.

To address this gap, we use the normal and broken-stitch classes of StitchingNet [4]. We train MobileNetV3 on labeled images from some fabric groups and test it on different, held-out groups in five folds. We report macro-F1, broken-stitch recall, false alarms, and variation across fabric groups. We then compare two weight initializations and test an edge-fusion branch and a longer training schedule under matched settings. We also inspect selected model decisions with Grad-CAM and examine how related-image splitting affects a separate edited-image dataset. *Our positioning is an evaluation and failure-analysis study*, not a claim of a new architecture or a state-of-the-art detector. Because our models learn from other StitchingNet fabrics, our tests measure unseen-fabric generalization within this dataset, not zero-shot transfer to an independent factory.

These goals lead to four research questions:

RQ1: How does performance change across held-out fabric groups, and how do related-image splits affect a separate development evaluation?

RQ2: Does additional pretraining on edited stitch images improve fabric-held-out macro-F1 compared with ImageNet initialization alone?

RQ3: Does extending training from six to 30 epochs or adding a Sobel edge branch improve performance on the same held-out fabrics?

RQ4: What do Grad-CAM maps show in selected correct and missed detections, and what are the limits of those explanations?

We answer these questions through four contributions. First, we report five-fold fabric-held-out results with class-specific error counts. Second, we compare initializations, training duration, and edge fusion using matched fabric folds. Third, we audit augmentation-family overlap and compare image-random with photo-grouped development splits. Finally, we examine the same broken-stitch cases with two trained models and report what Grad-CAM can and cannot explain. Together, these experiments identify practical limits of broken-stitch classification without claiming independent factory validation.

II. Related Work

A. Stitch detection and industrial image models

Kim *et al.* [2] used CNN features and image processing to find broken stitches. Chowdhury *et al.* [3] compared CNN, VGG-16, and VGG-19 models on a small stitch-image dataset.

TABLE I
HOW THIS STUDY DIFFERS FROM EARLIER SEWING-DEFECT WORK. RESULTS FROM DIFFERENT TASKS AND TEST SPLITS SHOULD NOT BE COMPARED AS ONE RANKING.

Study	Main method	Main test setting
Kim *et al.* [2]	CNN features and image processing	Broken-stitch images
Chowdhury *et al.* [3]	CNN and VGG models	Small binary dataset
Jung *et al.* [4]	CNN and transformer transfer learning	Split within each fabric setting
Our study	MobileNetV3, extra edge branch, Grad-CAM	Hold out entire fabric groups

Jung *et al.* [4] introduced StitchingNet and tested transfer learning on normal stitches and ten defect classes. Their test split included images from fabric settings also present in training. Our test folds instead leave out whole fabric settings. As a result, the scores from these studies do not form a direct ranking. More recent work studied sewing defects with PatchCore [10] and released StitchingNet-Seg masks [11]. StitchingNet-Seg comes from StitchingNet, so it cannot serve as a new independent test of the same images.

Researchers have also studied defects in other industrial images. MVTec AD offers real anomaly images and pixel labels [12]. DRAEM uses simulated defects to learn anomaly features [13]. PatchCore uses stored image patches to find unusual regions [14]. These methods provide useful ideas, but their data and labels differ from broken sewing stitches. We therefore focus on direct normal-versus-broken classification under a fixed fabric-group test.

B. Data shifts, model design, and explanations

Training and test data can differ even when they come from the same industry. Work on domain generalization shows why groups and test conditions matter [8], [9], [17], [18]. We use complete fabric groups as our test unit. We do not assume that different fabrics also mean independent cameras or factories.

MobileNetV3 offers a small pretrained image model and already uses channel attention [15], [16]. We test a second branch that extracts image edges, but we treat it as an experiment rather than a new kind of network. For explanations, Grad-CAM highlights image areas that influence a chosen model score [19]. Saliency tests also warn that a plausible heatmap may not give a trustworthy explanation [20]. We use heatmaps to describe selected cases, not to score the location of defects.

III. DATA AND METHODS

A. Datasets

We use two sets of stitch images. The first contains 7,364 readable images of normal stitches and digitally edited defects. Many images come from the same starting photo through editing or augmentation. File names suggest 31 photo groups, but we cannot confirm these groups from original camera records. We use this set to test data splits and to prepare one set of initial model weights. We never treat its edited defects as proof of performance on real broken stitches.

TABLE II
DATASETS USED IN THE EXPERIMENTS. THE EDITED-IMAGE SET HAS MORE IMAGE FILES THAN INDEPENDENTLY VERIFIED SOURCE PHOTOS.

Dataset	Images	Groups
Edited stitch-image set	7,364	31 suggested photo groups
StitchingNet normal/broken	3,637	11 fabric settings

Our main test uses StitchingNet [4]. We select only class 00 (2,436 normal stitches) and class 02 (1,201 broken stitches). These 3,637 images cover eleven fabric and thread settings, A–K. We do not use the other defect classes in this binary experiment. Table II summarizes the two sets.

B. Check for related images across splits

We use image file names to find repeated augmentation families. We then check whether members of the same family appear in different dataset folders. We also compare exact file hashes. For a second check, we join edited defects with their suggested starting photos. We use these photo groups to keep related images together. Because we do not have the original editing logs, the group identities remain estimates.

We compare two five-fold tests on 6,278 development images from 26 suggested photo groups. The first test splits images at random. The second keeps each photo group in one fold. Both use the same frozen MobileNetV3 image features and the same balanced logistic classifier. Only the split rule changes. This is an exploratory check of how test design changes the score; it is not an estimate of performance in a new factory.

C. Test on unseen fabrics

We split the eleven StitchingNet fabric settings into five folds. For each fold, we train on the other fabrics and test on the held-out fabrics. We check that no fabric ID appears on both sides. We combine the five test predictions only after training ends. We use the same folds for all matching models.

We define four model settings: **ES-only** uses ImageNet weights followed by training on edited stitch images without StitchingNet fine-tuning; **IN-FT** fine-tunes ImageNet-initialized MobileNetV3 on the training fabrics; **ES-FT** starts from edited-stitch-pretrained weights and fine-tunes on the same training fabrics; and **EF-FT** adds the Sobel edge branch to ES-FT. Here, FT means fine-tuning on labeled StitchingNet training fabrics. ES-only is a separate cross-dataset transfer reference, not a matched fine-tuning baseline.

The IN-FT and ES-FT models use 224×224 input images, a batch size of 16, six epochs, AdamW, and class-weighted binary cross-entropy. The classifier head uses a learning rate of 5×10^{-4}, and the trainable last feature layers use 10^{-4}. Weight decay is 10^{-4}. During training, we rotate images by up to 8° and make small brightness and contrast changes. We keep batch-normalization statistics fixed. Test fabrics never update model weights or set the decision threshold.

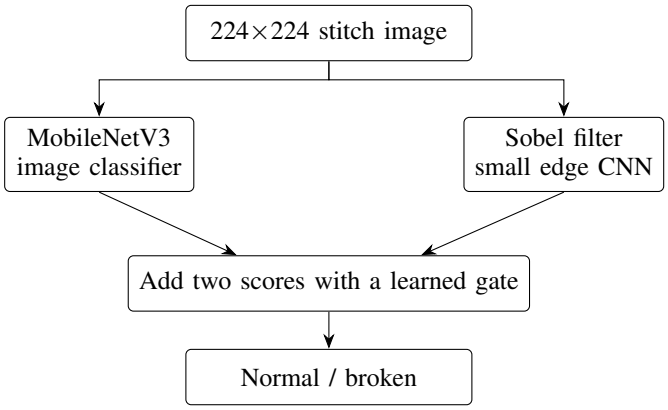


Fig. 1. Input/output view of our edge-fusion test model. It takes a stitch image and predicts normal or broken. A learned gate adds the edge branch's score to the MobileNetV3 score. We compare it with the unchanged MobileNetV3 model on the same held-out fabrics.

D. Longer training and an extra edge branch

We test training duration for IN-FT and ES-FT. For each initialization and fabric fold, we record held-out predictions at epochs 6 and 30 along the same training trajectory. We choose both checkpoints before examining their results. Each training-duration experiment has its own six-epoch checkpoint, so the valid comparison is within each pair.

For EF-FT, we add a small edge branch to the six-epoch ES-FT model. A Sobel filter finds strong brightness changes. Two small convolutional layers learn features from this edge map. The branch produces one score. A learned gate combines this score with MobileNetV3's score:

$$z(x) = z_{\text{MobileNet}}(x) + \tanh(g) z_{\text{edge}}(x), \qquad g = 0 \text{ at start.} \tag{1}$$

The zero gate makes the new model start with the same prediction as MobileNetV3. Training can then raise or lower the edge branch's effect. This model combines *two scores*; it does not segment the broken thread. Figure 1 shows the design.

E. How we measure and explain errors

We use macro-F1 as the main score and set the decision threshold to 0.5. We also count missed broken stitches and false alarms on normal stitches. We report balanced accuracy, broken-stitch recall, and results for each fabric fold. For matched models, we resample the eleven fabric groups to describe uncertainty. Eleven groups from one collection cannot prove that a change will help in other factories.

We use Grad-CAM to inspect ten real broken-stitch images. We select one correct broken-stitch detection and one missed broken stitch from each held-out fold of the fabric-trained model. We then compare the two model scores and heatmaps on each selected image. We also replace the strongest and weakest 20% of ES-only's highlighted areas with average-color pixels and record the change in score. The final feature maps have only 7×7 cells before resizing. The ten chosen examples are not a random sample. We therefore do not use them to estimate overall recall or to claim accurate defect location [19], [20].

TABLE III
STITCHINGNET BINARY CLASSIFICATION ($N = 3{,}637$; THRESHOLD 0.5). F1: MACRO-F1; REC.: BROKEN-STITCH RECALL; FP: FALSE ALARMS; FN: MISSED DEFECTS. ES-ONLY USES NO STITCHINGNET TRAINING AND IS A SEPARATE TRANSFER REFERENCE.

Model setting	F1	Rec.	FP	FN
ES-only (transfer)	.7253	.7194	589	337
IN-FT (MobileNetV3)	.7969	.9301	628	84
ES-FT (MobileNetV3)	**.8089**	.9134	559	104
EF-FT (edge fusion)	.8082	.9142	563	103

TABLE IV
TRAINING-DURATION ABLATION ON THE SAME FIVE FABRIC FOLDS. EACH SIX-/30-EPOCH PAIR COMES FROM ONE TRAINING TRAJECTORY. F1: MACRO-F1; REC.: BROKEN-STITCH RECALL.

Model setting	F1	Rec.	FP	FN
IN-FT, 6 epochs	.7951	.9267	630	88
IN-FT, 30 epochs	.7652	.9700	804	36
ES-FT, 6 epochs	.8075	.9159	568	101
ES-FT, 30 epochs	.7948	.9409	651	71

IV. RESULTS AND DISCUSSION

A. Why the test split matters

All 182 detected augmentation families appear in more than one original folder, although file hashes do not show identical copies across those folders. The file names also link 151 edited-defect families to 31 suggested starting photos. We cannot confirm those photo links without editing records.

On 6,278 development images, the random-image test reaches 0.8714 macro-F1. The photo-group test reaches 0.6879. This 0.1835 difference shows that the split choice has a large effect in this dataset. It does not measure how much any earlier model's score was overstated, because the groups and images in the folds also differ.

B. Performance on unseen fabrics

Table III reports results on the 3,637 StitchingNet images. ES-only reaches 0.7253 macro-F1 without StitchingNet training. This is a transfer reference, not a matched fine-tuning baseline. IN-FT reaches 0.7969 and ES-FT reaches 0.8089 macro-F1 on the same fabric-held-out folds. This difference is small. The 11-fabric bootstrap interval for the difference is $[-0.0090, 0.0360]$, which includes zero. We therefore cannot claim that extra pretraining gives a reliable gain.

ES-FT reaches 0.9634 macro-F1 on fabrics B/F but only 0.6931 on fabrics I/J. Other folds lie between these values. Figure 2 shows this gap. The model does not work equally well on every new fabric group.

C. Do more epochs or extra edges help?

Table IV shows that 30 epochs does not raise macro-F1 at the fixed threshold. For IN-FT, macro-F1 falls from 0.7951 to 0.7652; for ES-FT, it falls from 0.8075 to 0.7948. Longer

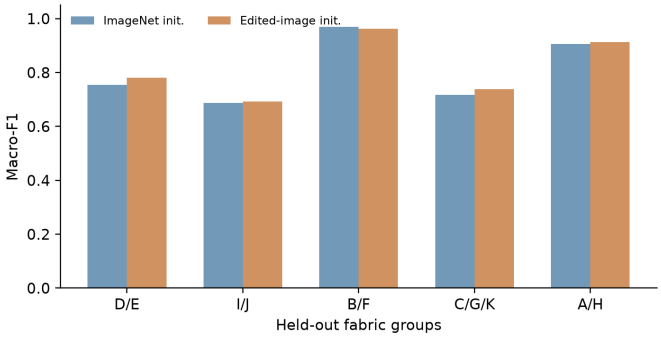


Fig. 2. Macro-F1 for each held-out fabric fold. Each fold tests fabrics that the model did not see during training. Fabric groups vary widely in difficulty.

TABLE V
SELECTED BROKEN-STITCH IMAGES. VALUES SHOW THE MODEL'S BROKEN-STITCH PROBABILITY. WE CHOSE THESE CASES AFTER OBSERVING RESULTS, SO THEY CANNOT ESTIMATE DATASET-WIDE RECALL.

Fabric	ES-only	ES-FT
D	.053	.664
C	.034	.942
A	.165	.998
B	.988	.259
J	.007	.044

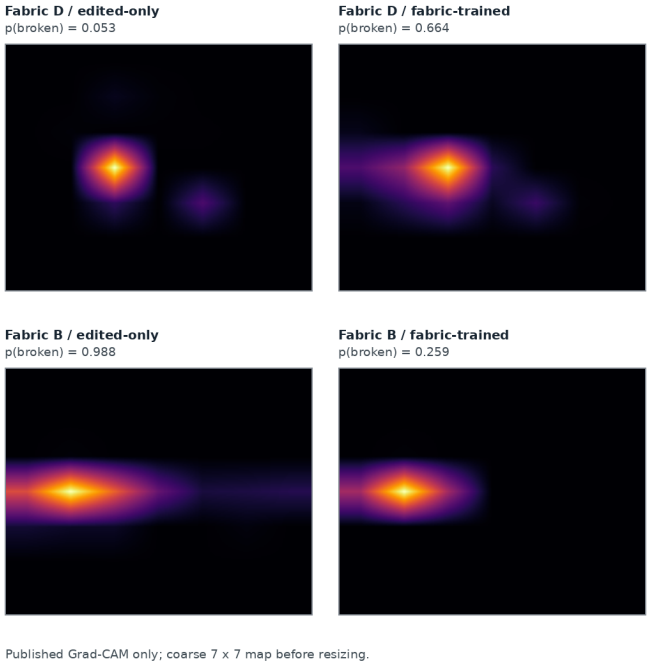


Fig. 3. Verified Grad-CAM on two selected broken-stitch cases. Each row compares the same image using ES-only (left) and ES-FT (right). We apply a fixed, monotonic false-color map to the saved grayscale CAMs. The model features have only 7×7 spatial cells. We do not claim accurate defect localization.

training finds more broken stitches, but it also creates more false alarms. For example, the latter run cuts missed broken stitches from 101 to 71 while false alarms rise from 568 to 651. The paired fabric-group intervals include zero, so we do not treat the difference as a proven drop in all future settings.

EF-FT does not improve macro-F1. It reaches 0.8082, compared with 0.8089 for the matched ES-FT baseline. It misses 103 broken stitches instead of 104 but raises false alarms from 559 to 563. The small change does not support a claim that this hybrid model works better on new fabrics.

D. What Grad-CAM shows

Table V shows five examples from our ten selected real broken-stitch images. For examples from fabrics D, C, and A, ES-only misses the defect, while ES-FT detects it. The opposite happens for the selected fabric B image. On fabric J, both models miss the defect. These examples show disagreements. They do not explain the exact reason for each decision.

We use the same fixed color conversion for the four published grayscale maps. Each map was normalized separately when created, so their colors are not comparable as absolute activation values. The Grad-CAM maps highlight different areas for the two models, but each map uses its own scale. We cannot compare their brightness directly. We also have no expert defect masks for these examples. Thus, the maps help us discuss individual failures, not prove which pixels caused them. The original experiment files provide the per-image scores and heatmaps.[1]

[1]Public Grad-CAM images and case data (GitHub release).

V. LIMITATIONS AND CONCLUSION

We test only eleven fabric settings from one source. Different settings may still share cameras, machines, or capture sessions. The data have already been examined during model development, so our results are exploratory rather than a fresh blind test. We cannot confirm the original photo groups in the edited-image set from source records. The selected Grad-CAM cases are too few and too carefully chosen to measure explanation quality. We also lack expert defect masks and new test images from independent factories.

Our study finds that held-out-fabric performance varies widely. ES-FT reaches 0.8089 macro-F1, but the edge branch does not improve this result. Longer training also fails to improve macro-F1 within the matched training-duration experiment. The data audit shows why related images should not cross splits. Grad-CAM helps us inspect selected mistakes, but it does not prove where a defect lies. Future work should collect independently captured fabrics and compare stronger models using the same fixed group-based test.

GENERATIVE-AI USE DISCLOSURE

AI tools helped with research planning, code workflows, literature searches, and writing. The human authors must check and approve every claim, reference, figure, and data permission. The conference must confirm that this use meets its policy before submission.

REFERENCES

[1] H. Y. T. Ngan, G. K. H. Pang, and N. H. C. Yung, "Automated fabric defect detection—A review," *Image Vis. Comput.*, vol. 29, no. 7, pp. 442–458, 2011, doi: 10.1016/j.imavis.2011.02.002.

[2] H. Kim, W.-K. Jung, Y.-C. Park, J.-W. Lee, and S.-H. Ahn, "Broken stitch detection method for sewing operation using CNN feature map and image-processing techniques," *Expert Syst. Appl.*, vol. 188, art. 116014, 2022, doi: 10.1016/j.eswa.2021.116014.

[3] H. Chowdhury *et al.*, "Broken stitch detection method for sewing operation using deep learning," in *Proc. Int. Conf. Innovations in Science, Engineering and Technology (ICISET)*, 2024, doi: 10.1109/ICISET62123.2024.10939324.

[4] W.-K. Jung, J. Kang, W. Kwon, and H. Kim, "StitchingNet and deep transfer learning method for sewing stitch defect detection," *J. Comput. Des. Eng.*, vol. 12, no. 4, pp. 140–154, 2025, doi: 10.1093/jcde/qwaf037.

[5] C. Shorten and T. M. Khoshgoftaar, "A survey on image data augmentation for deep learning," *J. Big Data*, vol. 6, art. 60, 2019, doi: 10.1186/s40537-019-0197-0.

[6] S. Kapoor and A. Narayanan, "Leakage and the reproducibility crisis in machine-learning-based science," *Patterns*, vol. 4, no. 9, art. 100804, 2023, doi: 10.1016/j.patter.2023.100804.

[7] F. Gerz and M. Jelali, "Towards reliable data augmentation in machine learning: Practices to prevent data leakage," *Smart Agric. Technol.*, vol. 15, art. 102462, 2026, doi: 10.1016/j.atech.2026.102462.

[8] K. Zhou, Z. Liu, Y. Qiao, T. Xiang, and C. C. Loy, "Domain generalization: A survey," *IEEE Trans. Pattern Anal. Mach. Intell.*, vol. 45, no. 4, pp. 4396–4415, 2023, doi: 10.1109/TPAMI.2022.3195549.

[9] P. W. Koh *et al.*, "WILDS: A benchmark of in-the-wild distribution shifts," in *Proc. Int. Conf. Mach. Learn.*, PMLR 139, 2021, pp. 5637–5664.

[10] J. Kim, J.-H. Woo, W.-K. Jung, and H. Kim, "An efficient anomaly detection method for the industrial sewing process using PatchCore and fine-tuned ResNet," *Sci. Rep.*, 2026, doi: 10.1038/s41598-026-73203-5.

[11] J. Park, W.-K. Jung, and H. Kim, "StitchingNet-Seg: A semantic segmentation dataset of industrial sewing stitch defects," *Sci. Data*, 2026, doi: 10.1038/s41597-026-08496-2.

[12] P. Bergmann, M. Fauser, D. Sattlegger, and C. Steger, "MVTec AD—A comprehensive real-world dataset for unsupervised anomaly detection," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit.*, 2019, pp. 9592–9600, doi: 10.1109/CVPR.2019.00982.

[13] V. Zavrtanik, M. Kristan, and D. Skočaj, "DRAEM—A discriminatively trained reconstruction embedding for surface anomaly detection," in *Proc. IEEE/CVF Int. Conf. Comput. Vis.*, 2021, pp. 8330–8339.

[14] K. Roth *et al.*, "Towards total recall in industrial anomaly detection," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit.*, 2022, pp. 14318–14328.

[15] A. Howard *et al.*, "Searching for MobileNetV3," in *Proc. IEEE/CVF Int. Conf. Comput. Vis. (ICCV)*, 2019, pp. 1314–1324.

[16] J. Hu, L. Shen, and G. Sun, "Squeeze-and-excitation networks," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit.*, 2018, pp. 7132–7141.

[17] I. Gulrajani and D. Lopez-Paz, "In search of lost domain generalization," in *Proc. Int. Conf. Learn. Represent.*, 2021.

[18] S. Sagawa, P. W. Koh, T. B. Hashimoto, and P. Liang, "Distributionally robust neural networks for group shifts: On the importance of regularization for worst-case generalization," in *Proc. Int. Conf. Learn. Represent.*, 2020.

[19] R. R. Selvaraju *et al.*, "Grad-CAM: Visual explanations from deep networks via gradient-based localization," in *Proc. IEEE Int. Conf. Comput. Vis. (ICCV)*, 2017, pp. 618–626, doi: 10.1109/ICCV.2017.74.

[20] J. Adebayo *et al.*, "Sanity checks for saliency maps," in *Adv. Neural Inf. Process. Syst.*, vol. 31, 2018.