

CM4/5 TPM Module Rev. 1.0: Hardware Root of Trust for Embedded Systems

CORE SECURITY ARCHITECTURE



TCG TPM 2.0 Certified Security

Integrates the Infineon SLB 9670 chip for standardized, hardware-backed cryptographic protection.




High-Speed SPI Interface

Supports clock rates up to 43 MHz for low-latency security processing.



Industry-Grade Certifications

Validated for FIPS 140-2 Level 2 (#3492) and Common Criteria EAL4+.

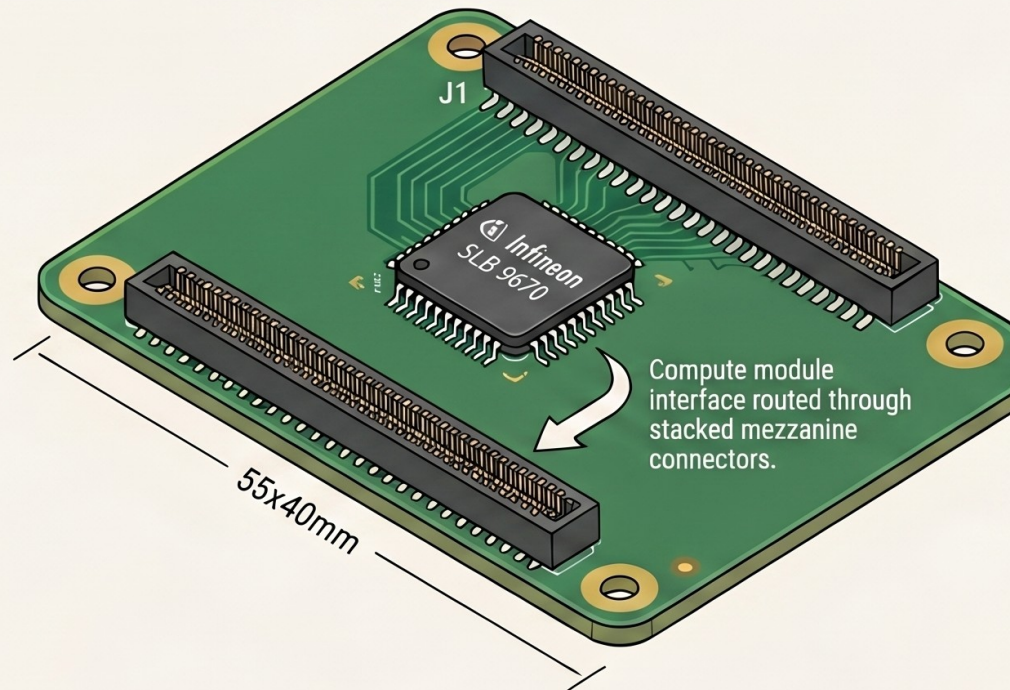


PRACTICAL SECURITY APPLICATIONS



Automated LUKS Disk Encryption

TPM-backed key unsealing automatically unlocks drives only when platform integrity is verified.



Hardware-Backed SSH Auth

Private RSA keys are stored and used exclusively within the TPM hardware.



Secure TLS via OpenSSL

Cryptographic handshakes are performed inside the hardware to prevent key exposure.