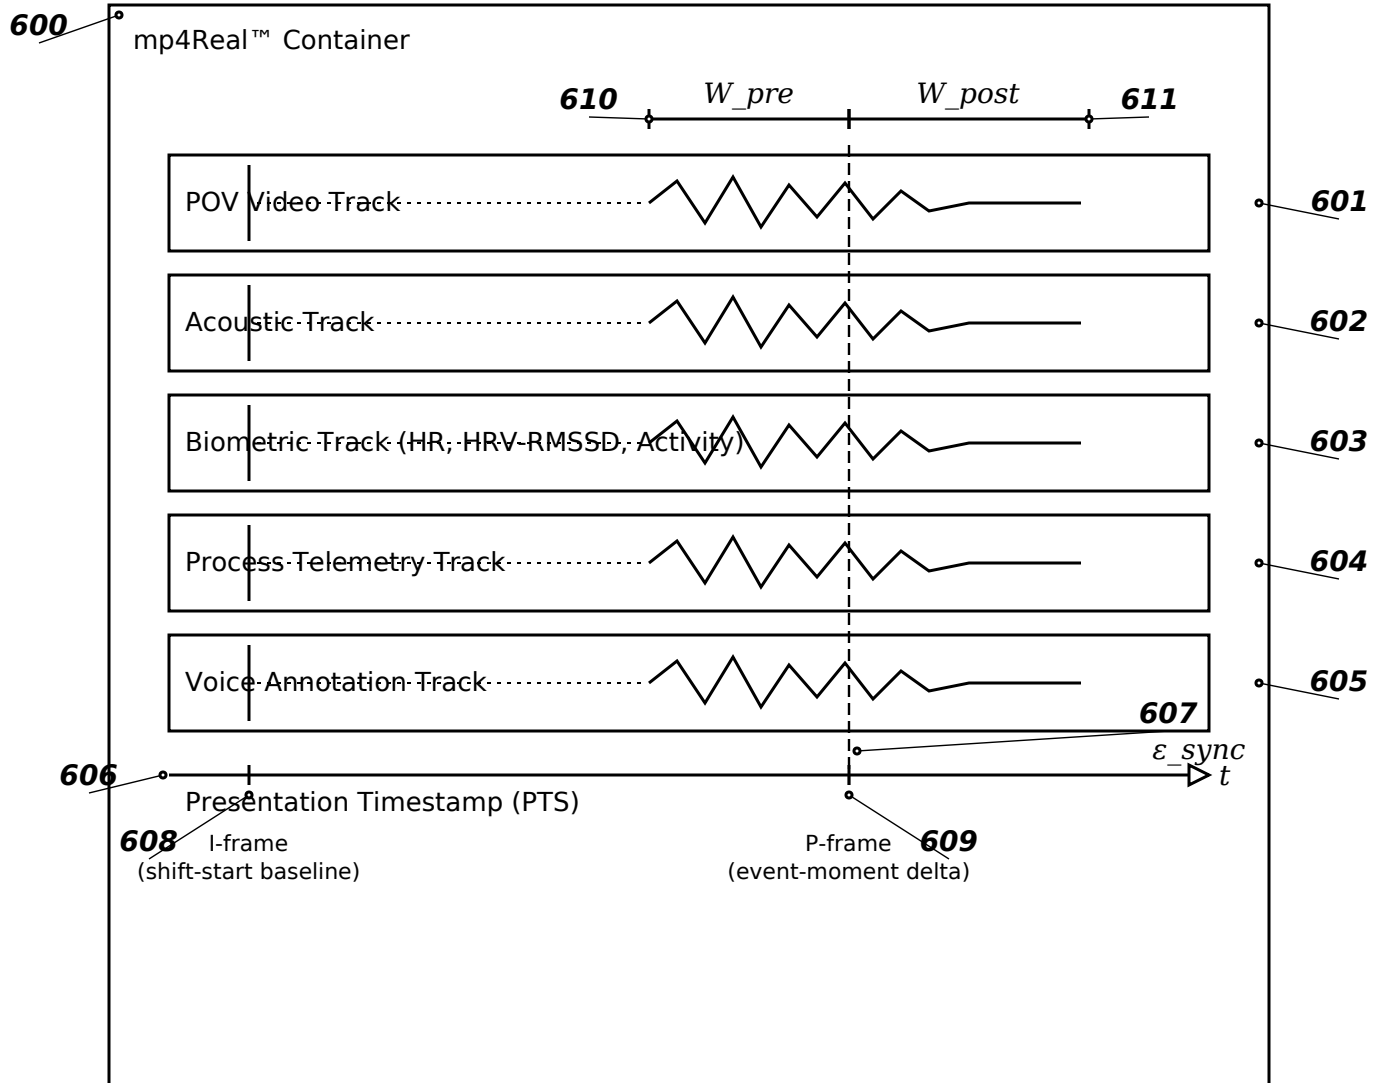


FIG. 6
mp4Real™ Multiplexed Reality-Codec Container



Parallel sensor tracks (601-605) are multiplexed within container (600) under shared Presentation Timestamp (606) with synchronization tolerance ϵ_{sync} (607). Shift-start I-frame (608) establishes per-track baseline; event-moment P-frame (609) encodes multi-channel delta within windowed capture W_{pre} (610) and W_{post} (611).

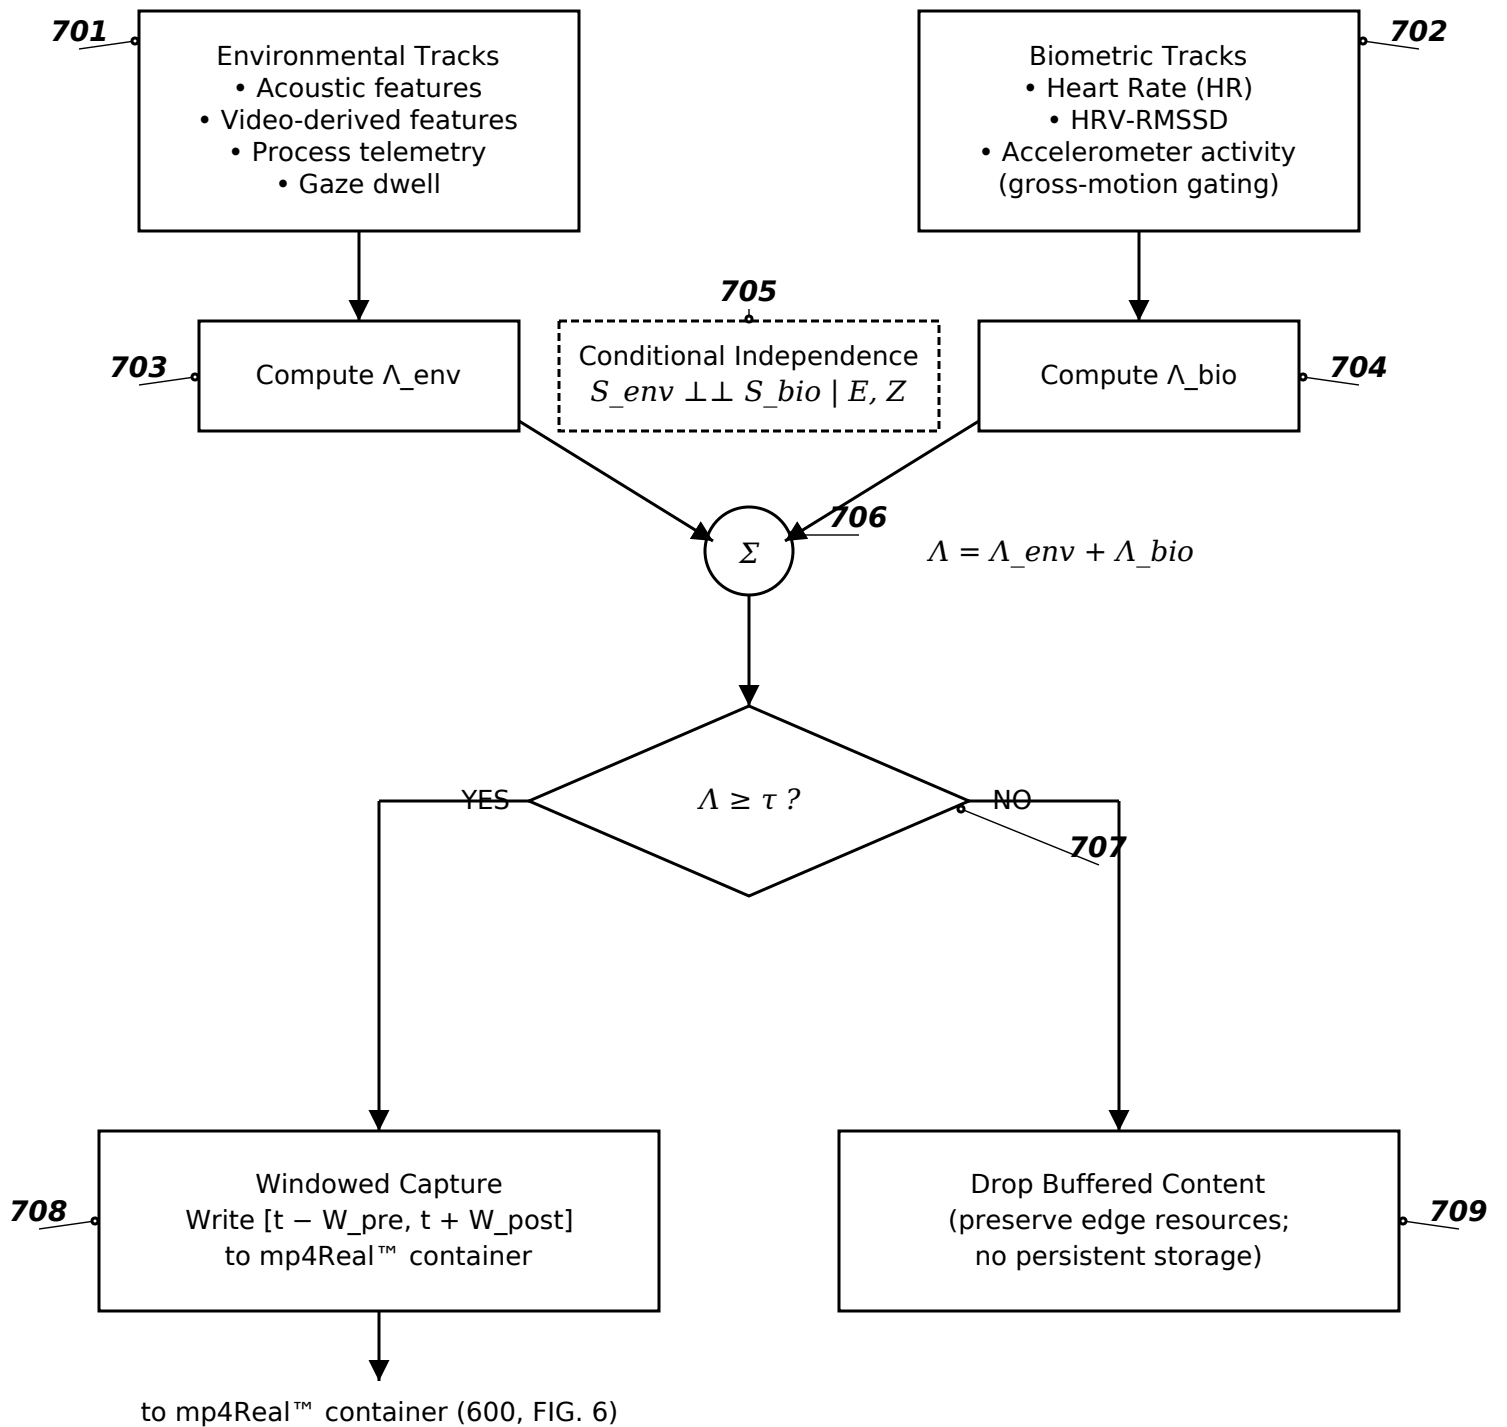
FIG. 7**Cyber-Physical Log-Likelihood-Ratio Gating Flow**

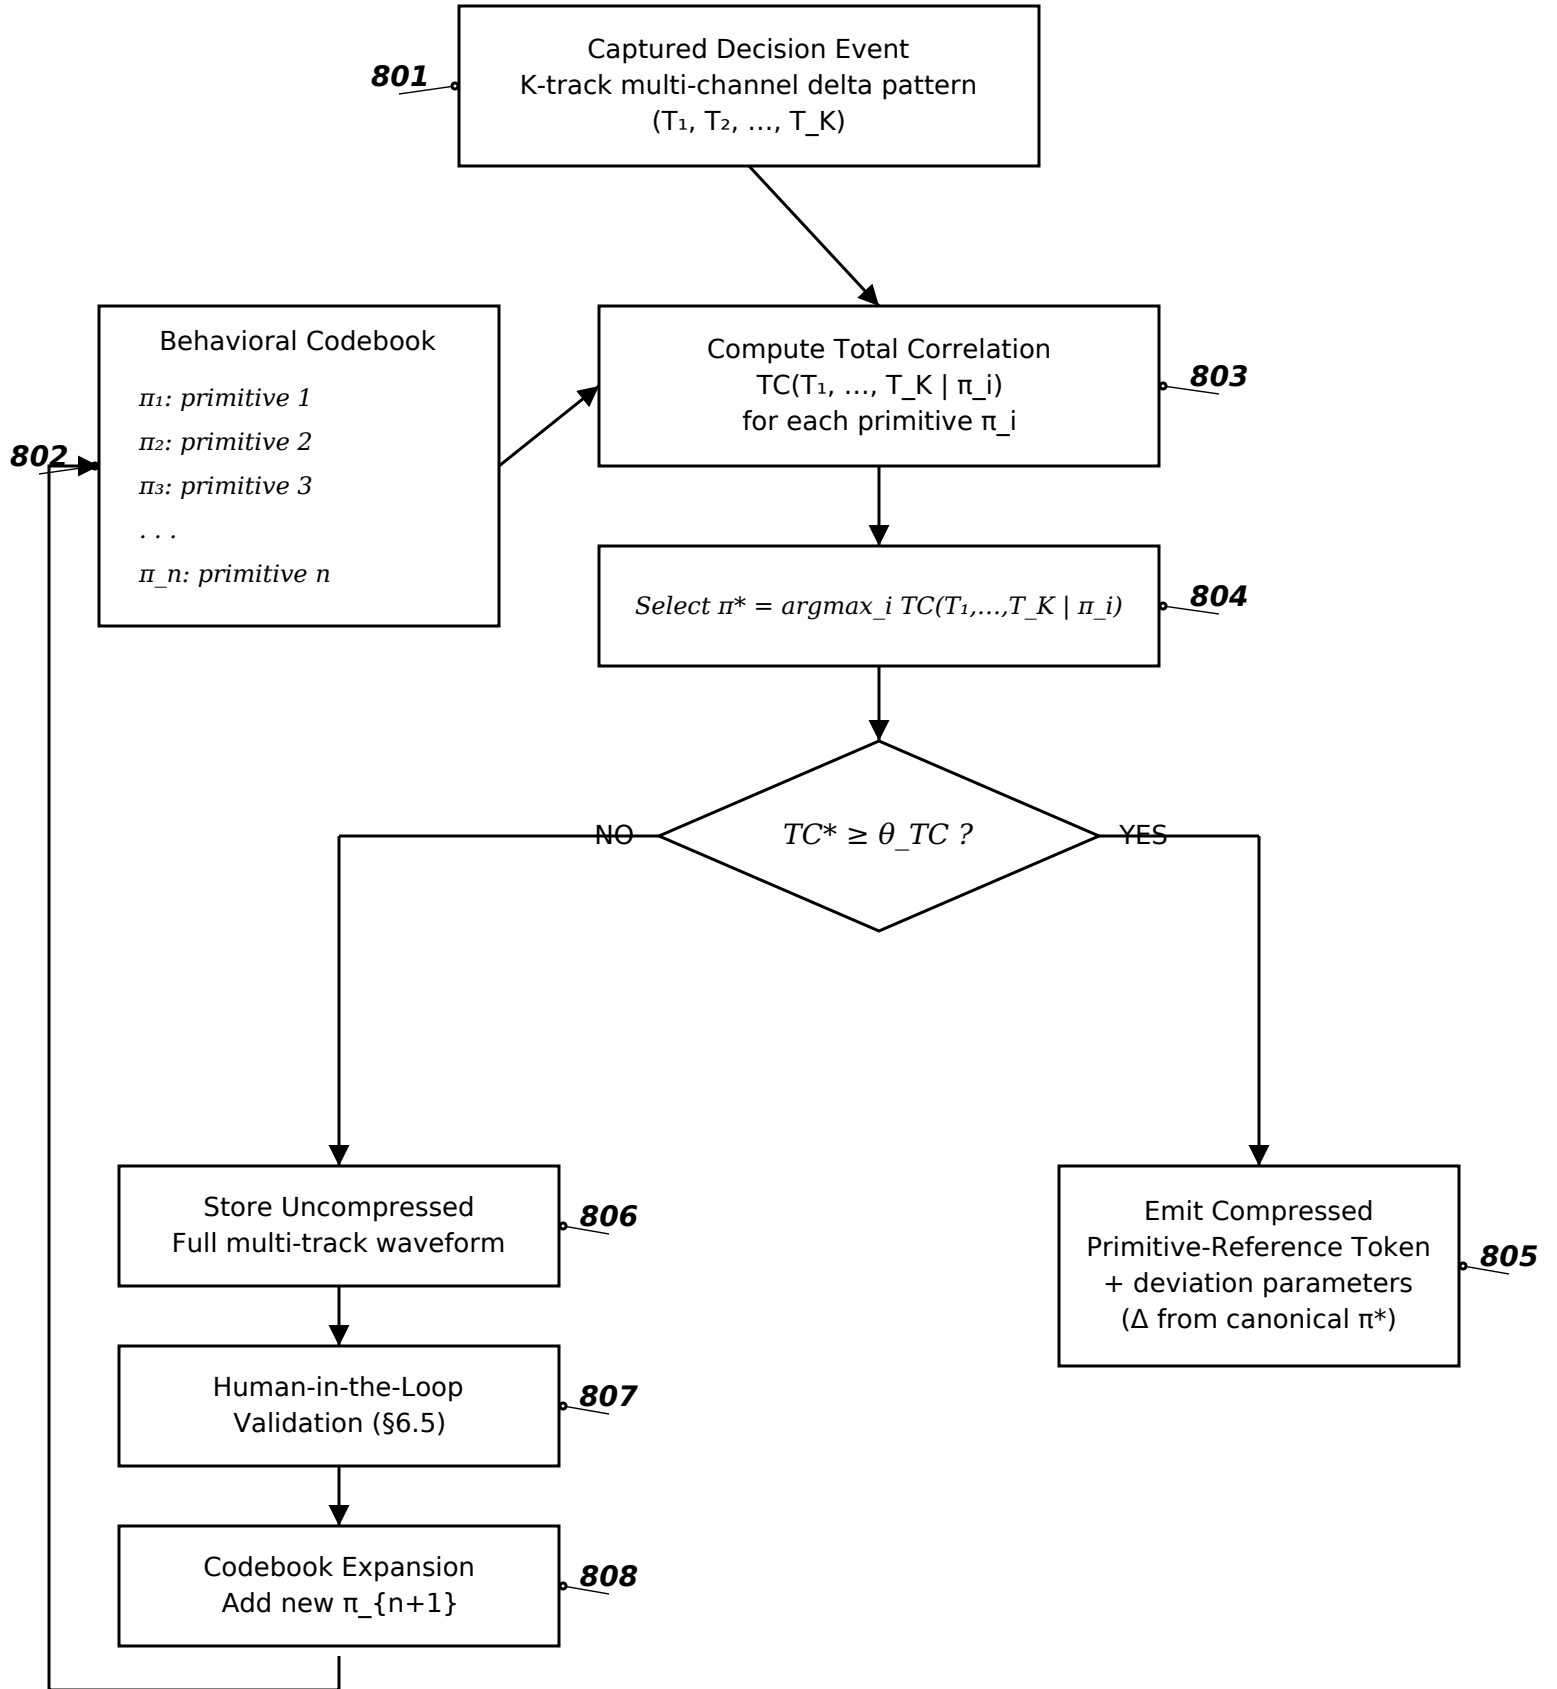
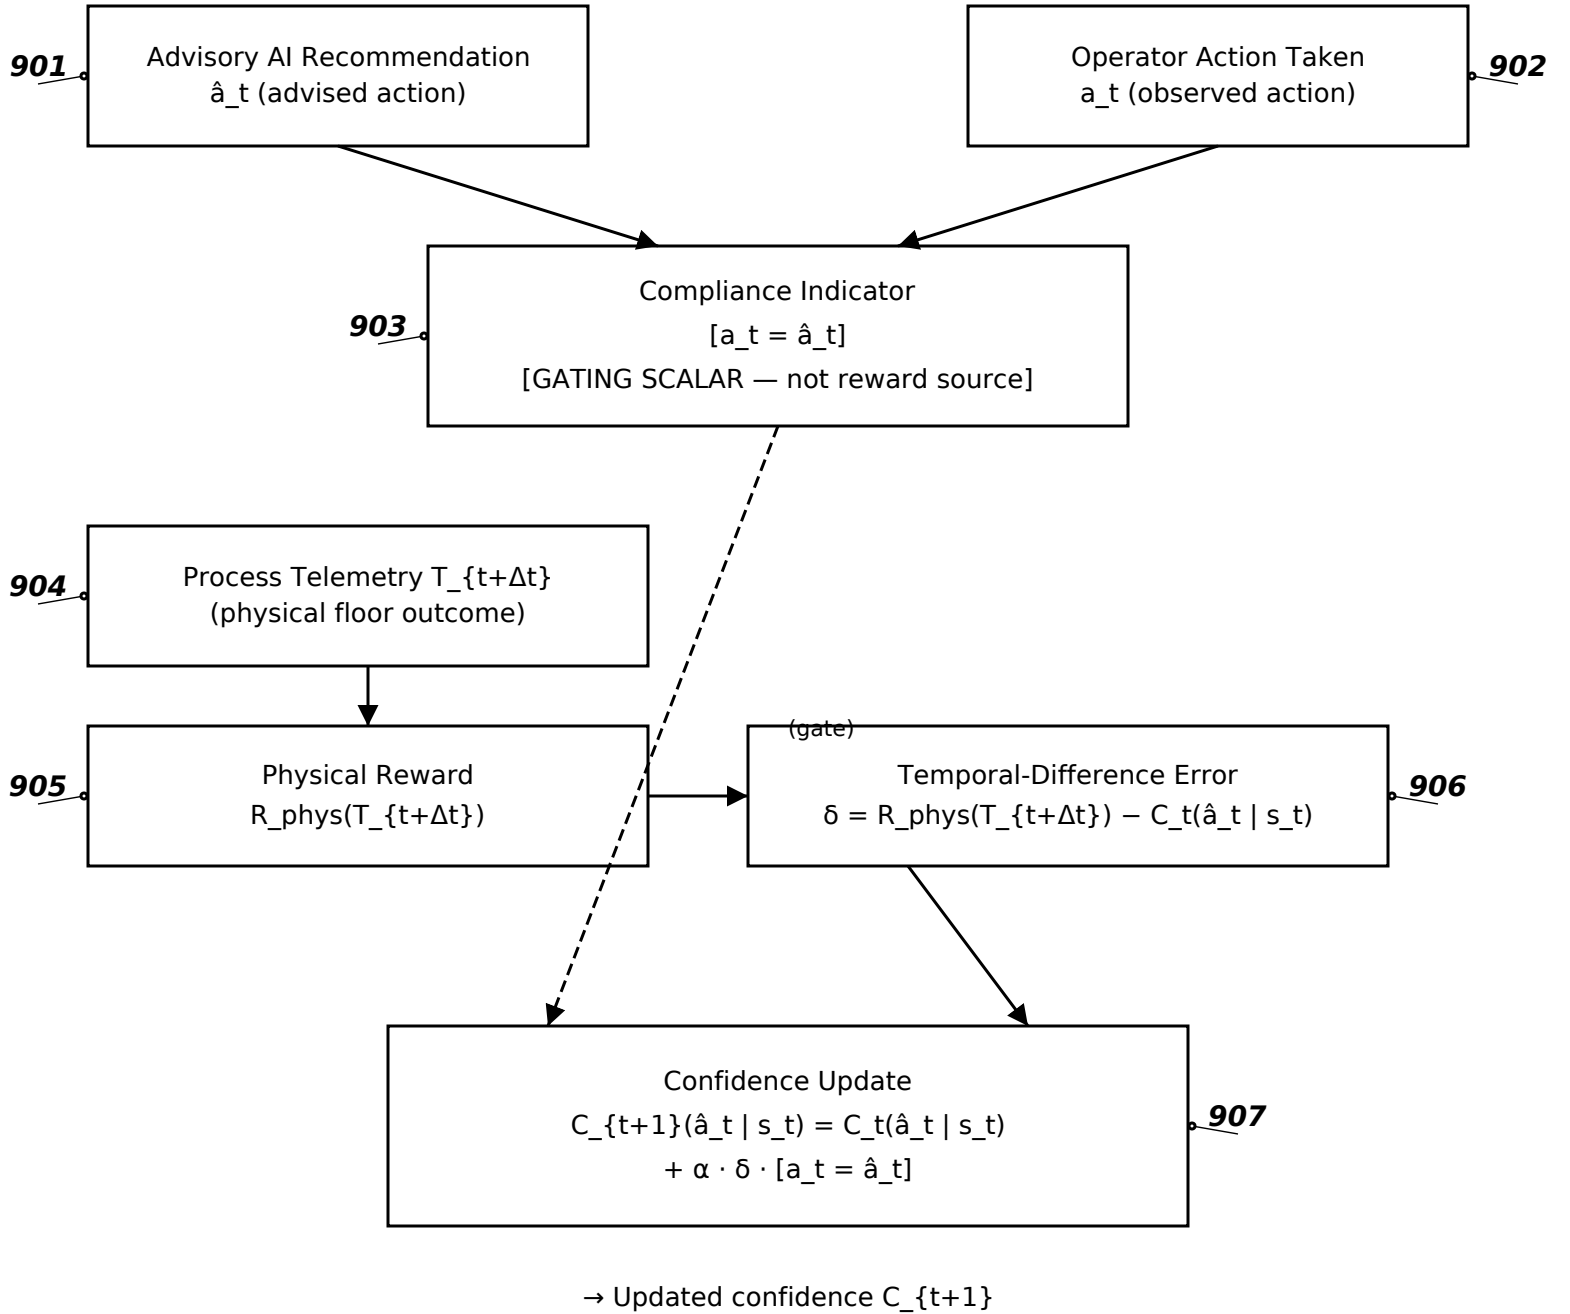
FIG. 8**Behavioral Codebook Compression Mechanism**

FIG. 9**Outcome-Grounded Confidence Update Flow****908**

Formal Conditional Independence (architectural guarantee):

$$R_{\text{phys}}(T_{\{t+\Delta t\}}) \perp\!\!\!\perp [a_t = \hat{a}_t] | s_{\{t \rightarrow t+\Delta t\}}$$

No information path admits operator compliance as evidence of physical success.

FIG. 10

Withhold-Sampling and KL Divergence Drift Detector

