

S1216F8-BD

High-Performance 167 Channel Beidou + GPS Receiver

FEATURES

- 167 Acquisition/Tracking Channels
- Support QZSS, WAAS, MSAS, EGNOS, GAGAN
- 16 million time-frequency hypothesis testing per sec
- -148dBm cold start sensitivity
- -165dBm tracking sensitivity
- 29 second cold start TTFF
- 3.5 second TTFF with AGPS
- 1 second hot start
- 2.5m CEP accuracy
- Multipath detection and suppression
- Jamming detection and mitigation
- Self-aided ephemeris prediction
- Works with active and passive antenna
- Active antenna detection & short protection
- Operating temperature -40 ~ +85°C
- Pb-free RoHS compliant

Applications


- Navigation / Tracking
- Timing reference

The S1216F8-BD is state-of-the-art global navigation satellite system receivers capable of tracking up to 28 GPS + Beidou + QZSS + WAAS + EGNOS + MSAS + GAGAN satellite signals combined.

Dual-satellite navigation receiver module receives greater number of satellites than available for GPS-only receivers. The increased satellite number offers superior performance in challenging urban canyon and multipath environments.

The S1216F8-BD module contains SkyTraq Venus 8 positioning engine inside, featuring high sensitivity for indoor fix, low power consumption, and fast TTFF. The superior -148dBm cold start sensitivity allows it to acquire, track, and get position fix autonomously in difficult weak signal environment. The receiver's -165dBm tracking sensitivity allows continuous position coverage in nearly all application environments. The high performance signal parameter search engine is capable of testing 16 million time-frequency hypotheses per second, offering industry-leading signal acquisition and TTFF speed.

The S1216F8-BD module contains LNA for easy integration with passive antenna and a SAW filter for increased jamming immunity. It works with both passive and active antenna; the self-contained antenna detection and short circuit protection feature enables lowest integration cost for system integrators using active antenna.

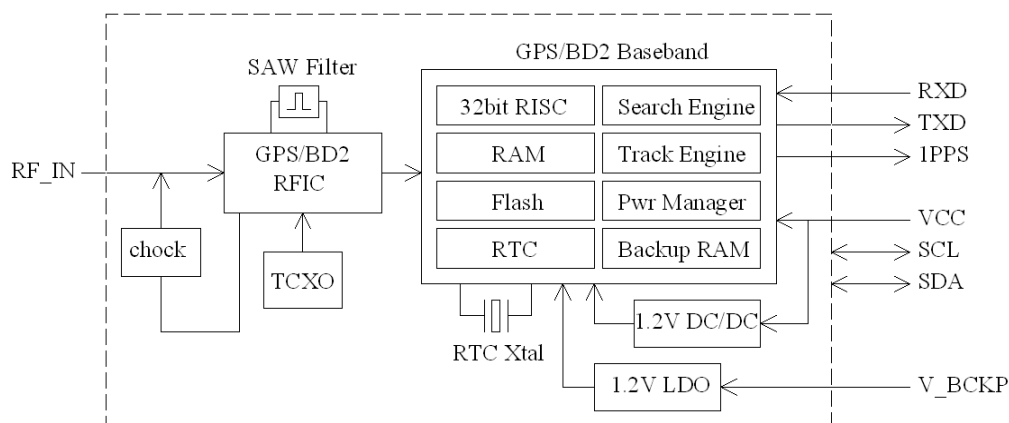

TECHNICAL SPECIFICATIONS

Receiver Type	L1 C/A, 167 channel
Modes	Beidou GPS Beidou + GPS
Accuracy	Position 2.5m CEP Velocity 0.1m/sec Time 10ns
Startup Time	1 second hot start < 29 second warm start 29 second cold start
Reacquisition	1s
Sensitivity	-148dBm cold start -165dBm navigation
Update Rate	1/2/4/5/8/10/20 Hz
Operational Limits	Altitude < 18,000m or Velocity < 515m/s
Serial Interface	3.3V LVTTTL level
Protocol	NMEA-0183 V3.01 9600 baud, 8, N, 1
Datum	Default WGS-84 User definable
Input Voltage	3.3V DC +/-5%
Power Consumption	45mA@3.3V acquisition 40mA@3.3V tracking
Dimension	16.0mm L x 12.2mm W
Weight:	1.6g
Operating Temperature	-40°C ~ +85°C
Storage Temperature	-55 ~ +100°C
Humidity	5% ~ 95%



ORDERING INFORMATION

Part Number	Description
S1216F8-BD	Beidou/GPS Receiver

SkyTraq Technology, Inc.
4F, No.26, Minsiang Street, Hsinchu, Taiwan, 300
Phone: +886 3 5678650
Fax: +886 3 5678680
Email: info@skytraq.com.tw

© 2013 SkyTraq Technology Inc. All rights reserved.
Not to be reproduced in whole or part for any purpose without written permission of SkyTraq Technology Inc ("SkyTraq"). Information provided by SkyTraq is believed to be accurate and reliable. These materials are provided by SkyTraq as a service to its customers and may be used for informational purposes only. SkyTraq assumes no responsibility for errors or omissions in these materials, nor for its use. SkyTraq reserves the right to change specification at any time without notice.

These materials are provided "as is" without warranty of any kind, either expressed or implied, relating to sale and/or use of SkyTraq products including liability or warranties relating to fitness for a particular purpose, consequential or incidental damages, merchantability, or infringement of any patent, copyright or other intellectual property right. SkyTraq further does not warrant the accuracy or completeness of the information, text, graphics or other items contained within these materials. SkyTraq shall not be liable for any special, indirect, incidental, or consequential damages, including without limitation, lost revenues or lost profits, which may result from the use of these materials.

SkyTraq products are not intended for use in medical, life-support devices, or applications involving potential risk of death, personal injury, or severe property damage in case of failure of the product