RECOMMENDED

RE 40 Ø40 mm, Graphite Brushes, 150 Watt

Part number 148867



Compare product

Add to wish list

Make a request

Send to a colleague

Price scales

Price per unit 1-4 5-19 20-49 €347.73 €287.36 €226.00 On request

from 50 On re
Prices excluding VAT and shipping costs

Start combination

Order quantity

/ 1

Add to cart

Print specifications


Description

[Enlarge image

maxon DC motors are high-quality motors fitted with powerful permanent magnets. The "heart" of the motor is the worldwide patented ironless rotor. For you, this means cutting-edge technology in compact, powerful and low inertia drives.

Specifications


Technical illustrations

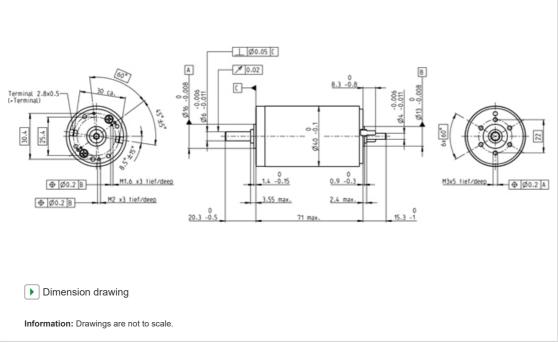

Values at nominal voltage	
Nominal voltage	24 V
No load speed	7580 rpm
No load current	137 mA
Nominal speed	6940 rpm
Nominal torque (max. continuous torque)	177 mNm
Nominal current (max. continuous current)	6 A
Stall torque	2420 mNm
Stall current	80.2 A
Max. efficiency	91 %
Characteristics	
Terminal resistance	0.299 Ω
Terminal inductance	0.082 mH
Torque constant	30.2 mNm/A
Speed constant	317 rpm/V
Speed / torque gradient	3.14 rpm/mNm
Mechanical time constant	4.67 ms
Rotor inertia	142 gcm ²
Thermal data	
Thermal resistance housing-ambient	4.65 K/W

Thermal resistance winding-housing	1.93 K/W	
Thermal time constant winding	42.8 s	
Thermal time constant motor	809 s	
Ambient temperature	-30+100 °C	
Max. winding temperature	+155 °C	
Mechanical data		
Bearing type	ball bearings	
Max. speed	12000 rpm	
Axial play	0.05 - 0.15 mm	
Radial play	0.025 mm	
Max. axial load (dynamic)	5.6 N	
Max. force for press fits (static)	110 N	
(static, shaft supported)	1200 N	
Max. radial load	28 N, 5 mm from flange	
Other specifications		
Number of pole pairs	1	
Number of commutator segments	13	
Number of autoclave cycles	0	
Product		
Weight	480 g	

Operating Range

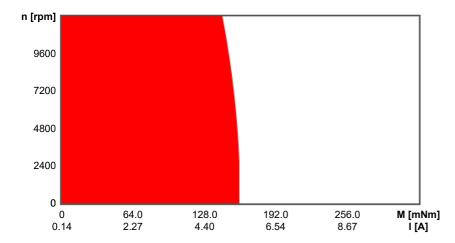

Continuous operation range

Short term operation range

Downloads



> CAD drawing (STEP) (ZIP 184 KB)

Version 2017

► Catalog page

- > Katalogseiten (deutsch, PDF 83 KB)
-) Catalog page (english, PDF 84 KB) ♪ カタログページ (日本語, PDF 116 KB)

Version 2019 Version 2019 Version 2017