


IP68 High-Power DC-DC Converter Module

12V / 120W and 19V / 57W Output Versions | Wide DC Input | Sealed Aluminum Housing

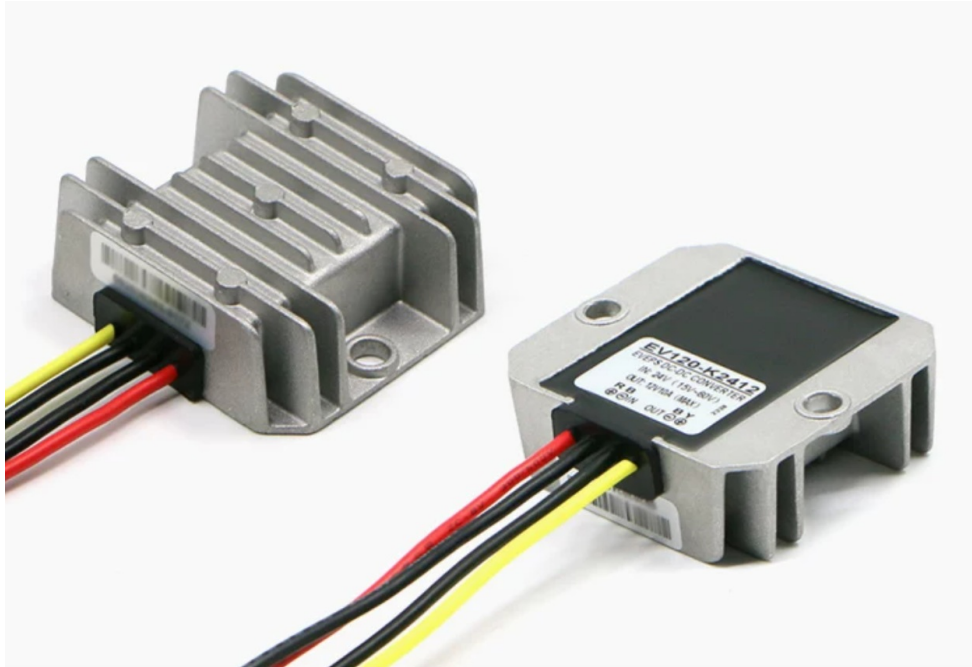

Product Overview

Rugged DC-DC converter module designed to provide a regulated DC output from a wider DC supply range. The supplied product material shows two configurations: a 12 V / 10 A / 120 W version and a 19 V / 3 A / 57 W version. The converter is housed in a finned aluminum enclosure and is specified with $\geq 93\%$ conversion efficiency, an operating temperature range of -20 to 80 deg C, and an IP68 protection rating.

Key Features


- 12 V / 10 A / 120 W and 19 V / 3 A / 57 W output versions
- Wide DC input range tailored to each version
- Regulated output tolerance of ± 0.15 V
- Conversion efficiency $\geq 93\%$
- IP68 protection rating
- Operating temperature: -20 to 80 deg C
- Finned aluminum housing

Electrical & Mechanical Specifications

Parameter	12V Output Version	19V Output Version
Input Voltage	DC 15-60 V	DC 9-16 V
Output Voltage	DC 12 V +/- 0.15 V	DC 19 V +/- 0.15 V
Output Current	10 A	3 A
Output Power	120 W	57 W
Efficiency	>= 93%	>= 93%
Operating Temperature	-20 to 80 deg C	-20 to 80 deg C
Protection Rating	IP68	IP68
Weight	106 g	99 g
Dimensions	64 x 60 x 22 mm	58 x 39.5 x 21.8 mm
Cable Length	13 cm	21 cm

12V / 120W Version

✓ 24V Input 12V10A Output
Weight : 106g

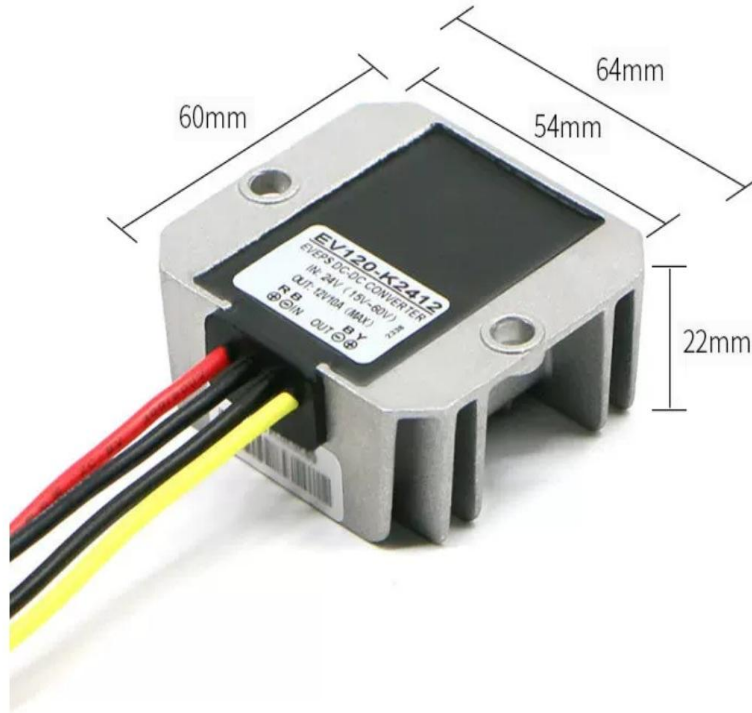

The supplied dimension image identifies the 12 V version with a 24 V input example and 12 V / 10 A output. Its specified enclosure size is 64 x 60 x 22 mm and weight is 106 g. The complete specification table gives the supported input range as DC 15-60 V.

Typical Applications

- Vehicle and mobile electrical systems
- Industrial DC power conversion
- Battery-powered equipment
- Robotics and embedded electronics
- Outdoor or environmentally exposed DC systems
- 12 V or 19 V regulated auxiliary power rails

Integration Notes

Select the converter version according to the required output voltage and ensure that the source voltage remains within the specified input range. The 12 V and 19 V versions have different input ranges, current ratings, power ratings, dimensions, weights, and cable lengths. The supplied files do not state detailed protection functions beyond the IP68 rating, nor do they provide certification, ripple/noise, no-load current, or transient-response data.

Source-control note: This datasheet is based only on the four supplied product images. The Chinese specification image was used only as a source for confirmed values and is not reproduced in the final English-only datasheet.