

Ultra-Slim Thermally Isolated Wireless Charging Pad

Low-profile 75 x 160 mm automotive-style wireless charging module with separated control electronics



Thin charging surface. Heat-generating electronics moved away from the phone.

A rectangular wireless charging pad designed around a separated-coil and external-control architecture to reduce heat concentration at the device charging surface.

Preliminary specification prepared solely from the supplied four-image package. Dimensions shown in the source are preserved; electrical values not provided are marked TBD.

1. Functional Description

The Ultra-Slim Thermally Isolated Wireless Charging Pad provides a broad, low-profile contactless charging surface suitable for automotive consoles and other integrated surfaces. Unlike designs that place all control electronics directly under the phone, the supplied architecture separates the wireless charging coil from heat-generating mainboard components and locates the control electronics in an inline cable module. This arrangement is intended to reduce heat accumulation near the phone while charging.

2. Key Features

Wireless charging	Central marked charging zone for compatible mobile devices.
Thermally separated architecture	Source diagram states that the internal wireless charging coil is separated from heat-generating mainboard components.
External control module	Main control electronics are located in an inline cable module away from the phone charging surface.
Ultra-slim pad	Source dimensional view shows a 3.5 mm main pad thickness.
Automotive-style surface	Textured side areas and product imagery show use on a vehicle center console.
Large charging platform	75 mm width x 160 mm length provides a stable phone-support surface.
Integrated cable	Cable exits from the pad and passes through the external electronics module.

3. Electrical Characteristics

Electrical input	TBD - source does not state the required voltage/current.
Wireless output power	TBD - no verified charging wattage is shown.
Wireless charging protocol	TBD - exact Qi version or proprietary protocol is not stated.
Control electronics	External inline mainboard/control module shown in the cable assembly.
Thermal design intent	Electronics separation is presented in the source as a means of maintaining lower phone temperature and efficient charging.
Protection functions	TBD - confirm FOD, thermal, overcurrent, overvoltage and short-circuit protection.

4. Mechanical Specifications


Overall width	75 mm
Overall length	160 mm
Main pad thickness	3.5 mm
Local lower/connector-side thickness	7 mm - dimension shown in the side-view source graphic.
Product form	Rectangular low-profile wireless charging pad with textured side sections.
Charging zone	Raised/defined central rectangular wireless charging area.
Cable length	TBD.
Weight	TBD.
Mounting method	TBD - application imagery shows placement/integration on an automotive center console.

5. Input / Output Summary

Input	Low-voltage wired input through the cable assembly; exact voltage/current TBD.
Control stage	Inline external electronics module.
Power-transfer stage	Internal wireless charging coil located in the pad.
Output	Wireless power delivered to a compatible device positioned over the marked center charging zone.

6. Typical Applications

Automotive center consoles, vehicle interior charging trays, mobility platforms, desks, furniture surfaces and other installations where a thin charging surface and reduced local electronics heat are desirable.

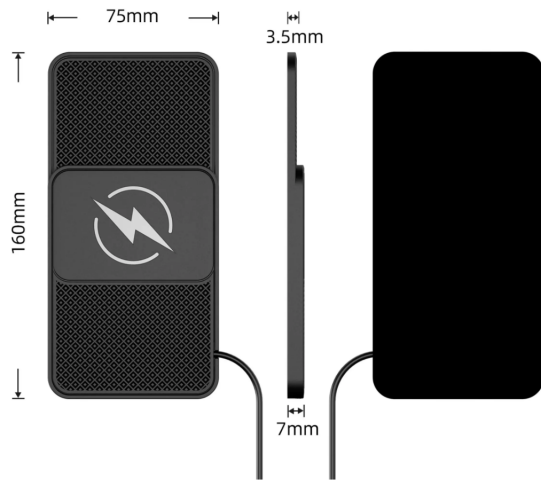

7. Thermal Architecture



The source material specifically emphasizes physical separation between the charging coil and heat-generating mainboard components. The main electronics are shown in an external inline module, reducing the amount of active electronics directly beneath the phone.

8. Production-Release Data Required

Before release as a controlled SiCore specification, confirm input voltage/current, rated wireless output power, charging protocol and operating frequency, charging efficiency, maximum allowable phone/pad temperature, thermal derating behavior, foreign-object detection, electrical protections, cable and connector specification, exact mounting method, environmental rating, enclosure materials, operating/storage temperature, product weight and applicable automotive/consumer EMC and safety certifications.

9. Product Classification

Primary category: Wireless Charging

Product type: Ultra-Slim Integrated Charging Pad

Target application: Automotive / Embedded Surface Charging

Confirmed size: 75 x 160 mm; 3.5 mm main pad thickness

Architecture: Separated charging coil + external inline control electronics

Document status: Preliminary English product specification based solely on the supplied product imagery. No unsupported voltage, current or wireless wattage values have been introduced.