


Wide-Input USB Type-C PD DC Power Converter Module

10-30 V DC Input | 5-20 V USB Type-C PD Output | Compact Inline Design

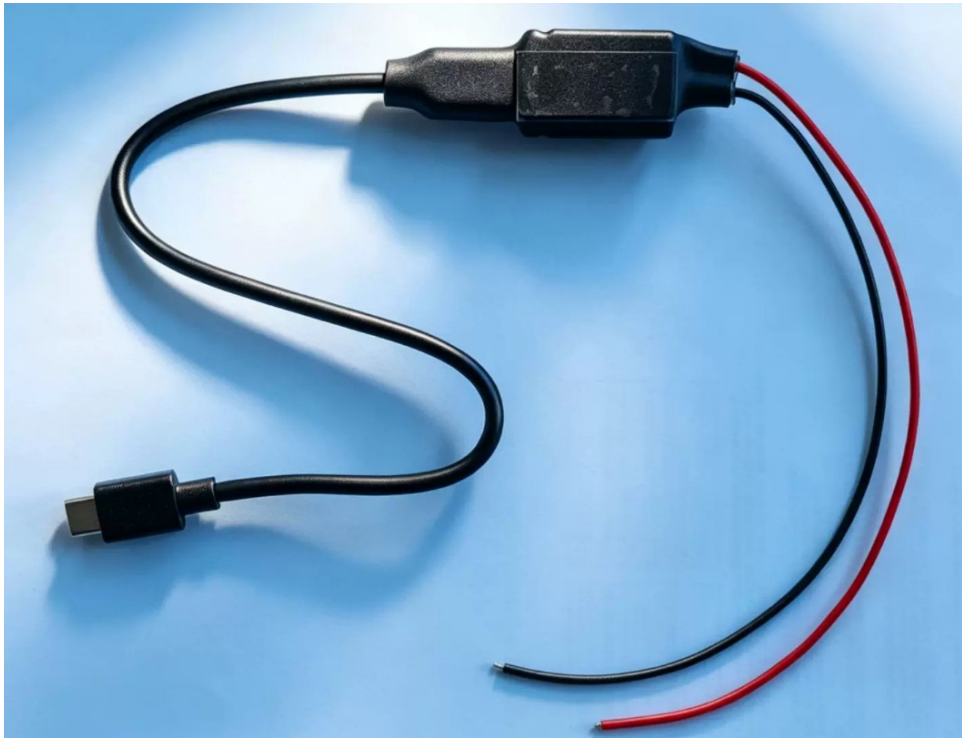

Product Overview

Compact inline DC power conversion module designed to accept a wide DC input through red/black lead wires and provide power through a USB Type-C output connector. The supplied product images identify a 10-30 V DC input range and a 5-20 V Type-C PD output range, making the module suitable for embedded DC-to-USB-C power conversion applications.

Key Features

- Wide 10-30 V DC input range
- USB Type-C PD output
- 5-20 V output range identified in the supplied product image
- Red/black flying-lead DC input for embedded installation
- Compact inline encapsulated converter housing
- Approximate converter body face dimensions shown as 31 mm x 21 mm
- Integrated USB Type-C output cable


Electrical Specifications

Parameter	Specification
DC Input Voltage	10-30 V DC
Input Connection	Red / black flying leads
Output Interface	USB Type-C
Output Voltage Range	5-20 V

Output Protocol	USB Type-C PD
Output Current	Not provided in supplied files
Maximum Output Power	Not provided in supplied files
Conversion Efficiency	Not provided in supplied files
Protection Functions	Not provided in supplied files


Mechanical Information

Parameter	Specification
Converter Body Length	31 mm shown in supplied image
Converter Body Width / Height	21 mm shown in supplied image
Cable Length	Not provided
Housing	Inline molded / encapsulated housing, as shown

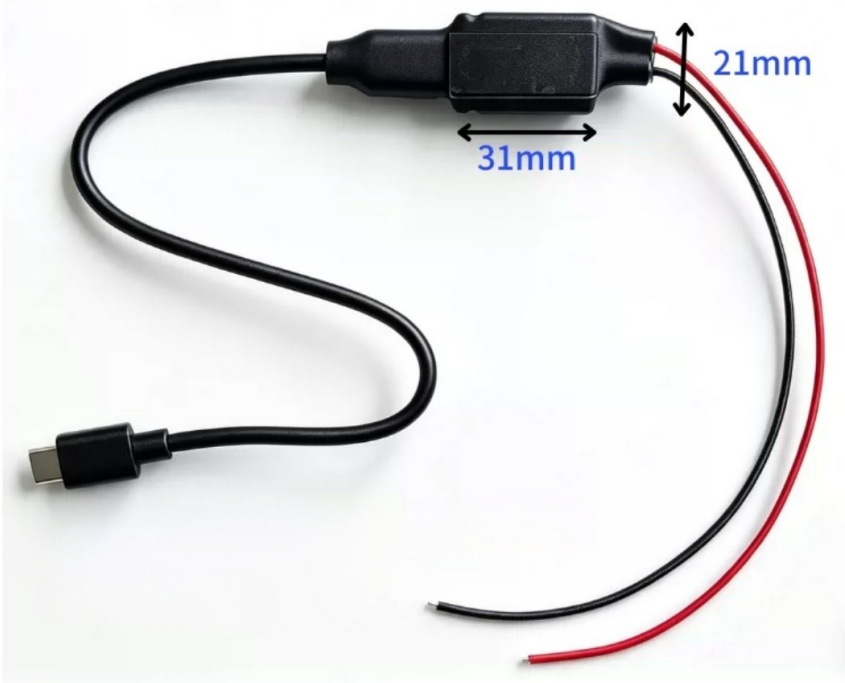

Mechanical dimensions shown in the supplied product image.

Interface & Polarity

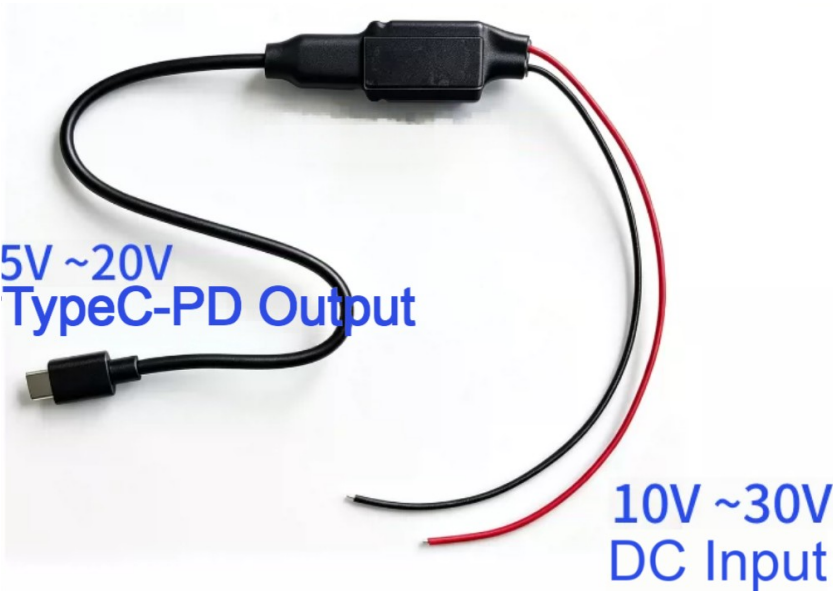

The red and black leads form the DC input connection. The USB Type-C connector is the power output. Observe correct input polarity before energizing the converter.

Typical Applications

- Vehicle and mobile DC power systems
- Battery-powered equipment requiring USB Type-C PD output
- Industrial embedded electronics
- Robotics and mobile equipment
- Custom USB Type-C power adapters
- DC power distribution systems requiring a compact Type-C output stage

Integration Notes

Confirm that the connected load is compatible with the available USB Type-C PD output profile before use. Final system design should verify input polarity, cable current capability, thermal performance, output power capability, and protection behavior under the intended operating conditions.

Source-control note: This preliminary datasheet is based only on the four supplied product images. No webpage or HTML file was included in the package. Output current, maximum power, efficiency, operating temperature, protection ratings, certifications, and full mechanical dimensions were not provided and are therefore not claimed.