

Two Dimensional Biped Locomotion Using Physics-Based Animation

Kaitlin Thachuk

A thesis submitted in partial fulfillment for the
degree of Bachelors of Science (Honours)

in the

Department of Computer Science

University of British Columbia

Supervisor: Prof. Michiel van de Panne

April 2018

©Kaitlin Thachuk, 2018

Abstract

This project explores locomotion of a biped in two dimensions (2D) using the simple biped locomotion control (SIMBICON) framework. It is meant to be an introduction to the field of physics-based character animation. The project is completed in a newer physics engine PyBullet and the character is represented using MuJoCo XML. The SIMBICON framework includes implementing a basic finite state machine comprised of four states which drive the walking motion of the character. Balance feedback, torso control using the stance leg torque, and ensuring the swing foot placement is unaffected by torso pitch all contribute to achieving a more balanced walk. Torques for all the joints are calculated using proportional-derivative (PD) controllers. Debugging these types of systems often involves many hours of manually searching a parameter space since PyBullet does not have any useful built in tools. The results of this project are a set of target angles, feedback parameters, and gain parameters which are utilized in the main program to produce a character that walks on a plane. These parameters are different from the ones found in the original SIMBICON paper which implies these values may be sensitive to the simulator and character representation used.

Acknowledgements

First and foremost thank you to Prof. Michiel Van de Panne for taking me on and sharing his time and knowledge to introduce me to this topic.

A special thank you to Kristen Ruhnke without whom this thesis would probably not have been written in any sort of reasonable time frame; your support and motivation have made all the difference.

Finally thank you to my parents who have offered endless encouragement over the years.

Contents

1	Introduction	1
1.1	Previous Works	1
1.2	Overview of Approach	3
2	Methods	4
2.1	Finite State Machine	4
2.2	Torso and Swing-hip Control	4
2.3	Balance Feedback	6
2.4	Character Representation in Robotic Languages	7
2.5	PyBullet and Debugging	8
2.6	Process For Finding Parameters	9
3	Results and Discussion	12
4	Conclusion	15
5	Further Works	16
	References	17
A	Code and Documentation: Character Representation	18
A.1	MuJoCo XML code	18
A.2	Character Representation Documentation	20
B	Code and Documentation: Main Program	21
B.1	Python Code	22
B.2	Main Program Documentation	28

List of Figures

1	Visual representation of the character moving through each of the four states of the finite state machine as well as the transitions between the states.	5
2	Video demonstrating the character walking on the plane. . . .	13
3	Video demonstrating what happens when the character falls and displays erratic behaviour.	14
4	Diagram of how the links are labelled on the character.	30
5	Diagram of how the joints are labelled on the character.	31

List of Tables

1	State Descriptions for the Finite State Machine	6
2	Link Masses	8
3	Target Angles	12
4	Parameters	15

1 Introduction

1.1 Previous Works

The field of physics-based character animation has seen lots of improvement in the past ten years [1,2]. Physics-based character animation is characterized by controlling the character through external forces and torques, meaning the global position and alignment of the character is not directly controllable [1]. This is contrasted by the much more popular in industry kinematics-based animation which concerns itself only with motion trajectories on which the characters move [2]. The main problem with kinematics-based animation, and the main motivation for research into physics-based animation is that characters on a motion trajectory have no concept of mass, forces, or collision/object interaction dynamics [2]. All these shortcomings are easily rectified if the character exists in a physics-based environment where interactions would naturally be in accordance with the laws of physics. Of course physics-based animation is not without its' own flaws and limitations. The major ones that have held it back thus far are the fact that controlling the characters is quite complex, requires a lot of manual tuning, and is prone to exhibiting erratic behaviours if the character loses control [1].

Geijtenbeek and Pronost summarized previous work in this field quite nicely in the 2012 paper [1], which I will abbreviate here. Physics simulators, which are used to produce physics-based character animation, at a high level perform three basic steps. The first is collision detection, which is looking for intersections in the geometries of objects. Collision detection itself is a vast field of study which is outside the scope of this project. For interested readers Fares and Hamam [3] wrote a state-of-the-art review on collision dynamics for rigid bodies which nicely summarizes some of the techniques in the field. The second step is forward dynamics simulation, where laws of physics are applied to calculate the linear and angular acceleration produced by the forces [2]. Finally the last step is numerical integration. Using the previously computed accelerations the positions, orientations, and velocities of the objects are updated. There has been some effort put into finding robust integration methods, one of which is the Runge Kutta method. Some examples of physics simulators/engines include Bullet and its python wrapper PyBullet [4], MuJoCo [5], and Open Dynamics Engine (ODE) [6].

Moving on to the character itself, often the character models are constrained rigid bodies. This indicates that their bodies are non-penetrable and non-elastic, and that their motion is constrained through limits on the

joints connecting the links [1]. The joint constraints are meant to mimic the real life joint constraints experienced in humanoids, which the characters are often modelled after. The links themselves are often represented by simple geometries such as rectangles or cylinders, for which collision detection is easier, with given densities or masses which will be used by the forward dynamics step. The joints can be represented in many different ways, but the most common joints are hinge joints which could be used to model a knee or elbow joint, and ball-and-socket joints which would be useful for shoulders and hips.

Now that we have a basic understanding of how the character has been put together and the environment it will be in we can begin to discuss the real meat of the problem: motion control. A motion controller is responsible for helping the character achieve its' task like walking. There are three common design approaches to motion control: dynamics-based optimization control, stimulus-response network control and pose-driven feedback control [1]. Dynamics-based optimization control uses the equations of motion for the constrained dynamics to find joint torque values that optimize a high level objective [7]. Stimulus-response network control has roots in AI and biological systems where a generic control network achieves motion control by constructing relations between the input sensors and the output joint torques [1]. The design technique used in this project is pose-driven feedback, where the character has a set of target angles that form a pose and feedback controllers are used to compute torques that minimize the difference between the current pose and the target pose [2].

Feedback controllers are another area where there are quite a few different methods being used to control the character. For the sake of brevity, the focus will be on the ones used in this project although a more extensive list can be found in Geijtenbeek and Pronost [1]. The control technique utilized in this paper is called proportional-derivative (PD) control, which computes a torque that is linearly proportional to the difference between the current orientation and velocity and the desired orientation and velocity [2]. The equation governing this control method is

$$\tau = k_p(\Theta_d - \Theta) + k_d(\dot{\Theta}_d - \dot{\Theta}), \quad (1)$$

where τ is the calculated torque, Θ and $\dot{\Theta}$ represent the position and velocity of the joint, the subscript d indicates desired values for the position and velocity and k_p , k_d are controller gain values.

To actually get a character to perform an action such as walking we need to move through a progression of poses. The most general way this can be achieved is by using a finite state machine in which each state is associated with a key target pose [1]. Common triggers for state transitions are time limits and foot contacts. It is important to note that these target poses might not actually be reached when simulating and that some exaggeration might be necessary to achieve the desired motion. While this strategy is effective for 2D characters when moving in 3D some additional control is required for dealing with balance. An example of a 3D implementation can be seen in [8] and is outside the scope of this project.

1.2 Overview of Approach

Animating walking humanoids has long been both a challenging and crucial problem in compute graphics [2]. The simple biped locomotion control (SIMBICON) framework [8] aims to take the generally unstable biped and apply balance and feedback laws to create more robust motion. The purpose of this project was to reimplement the work done by Yin et al. [8] on SIMBICON in 2D using a newer physics simulator, PyBullet. SIMBICON is a framework for controlling a biped in both 2D and 3D using a pose-control finite state machine. This allows for a large flexibility in the amount of gaits possible and makes it possible to transition between gaits smoothly. In each state we apply torques to the joints that are calculated using PD controllers and let the physics simulator evolve the system. Finally balance control is provided in the form of a feedback strategy that attempts to place the foot appropriately given the position of the body’s center of mass as well as feedback to try and keep the torso upright.

2 Methods

Some of the methods (Secs. 2.1-2.3) described in this paper are techniques taken from the Yin et al. [8].

2.1 Finite State Machine

As mentioned above the character is controlled using a finite state machine. Each state has its own target pose which is given as a set of target joint angles for the stance and swing legs. The stance leg is the leg that remains in contact with the ground and provides stability whereas the swing leg is in motion driving towards the desired pose. The torques for each state are computed for each joint using Eq. 1 and the target angles for that particular state. The torques are then applied to the joints using the physics simulator which is also in charge of evolving the physics at each step. The torques are continually updated while in a given state until a state transition occurs. The states are also symmetric with respect to left and right.

Figure 1 shows a visual representation of the figure moving through the four states. We can see before the finite state machine starts the figure begins in a neutral position standing on the plane. Then in state 0 the right foot begins to swing forward trying to achieve its' desired pose. After 0.3 seconds we transition to state 1 where the right leg is still the swing leg but now the leg is coming down towards the plane. When the right foot makes contact with the ground we transition to state 2 which is a mirror image of state 0. In this state we now have the left leg as the swing leg and it is driving forward. After 0.3 seconds we again transition to state 3 which is the mirror of state 1. In this state we have the left leg driving down towards the ground and when the left foot makes contact we will transition back to state 0 and repeat the cycle. Table 1 contains a summarized version of the swing and stance legs as well as the transition for each state. At a high level this means while in each state we need to be calculating and updating torque values as well as checking to see if the conditions for a state transition have been met.

2.2 Torso and Swing-hip Control

There is a natural intuition that while simulating walking it is desirable to try to keep the character's torso as upright as possible with respect to the world frame. This can be achieved by using a virtual PD controller to compute a net torso torque τ_{torso} in the world frame. It also follows that the swing foot placement should not be affected by the current pitch of the torso. This

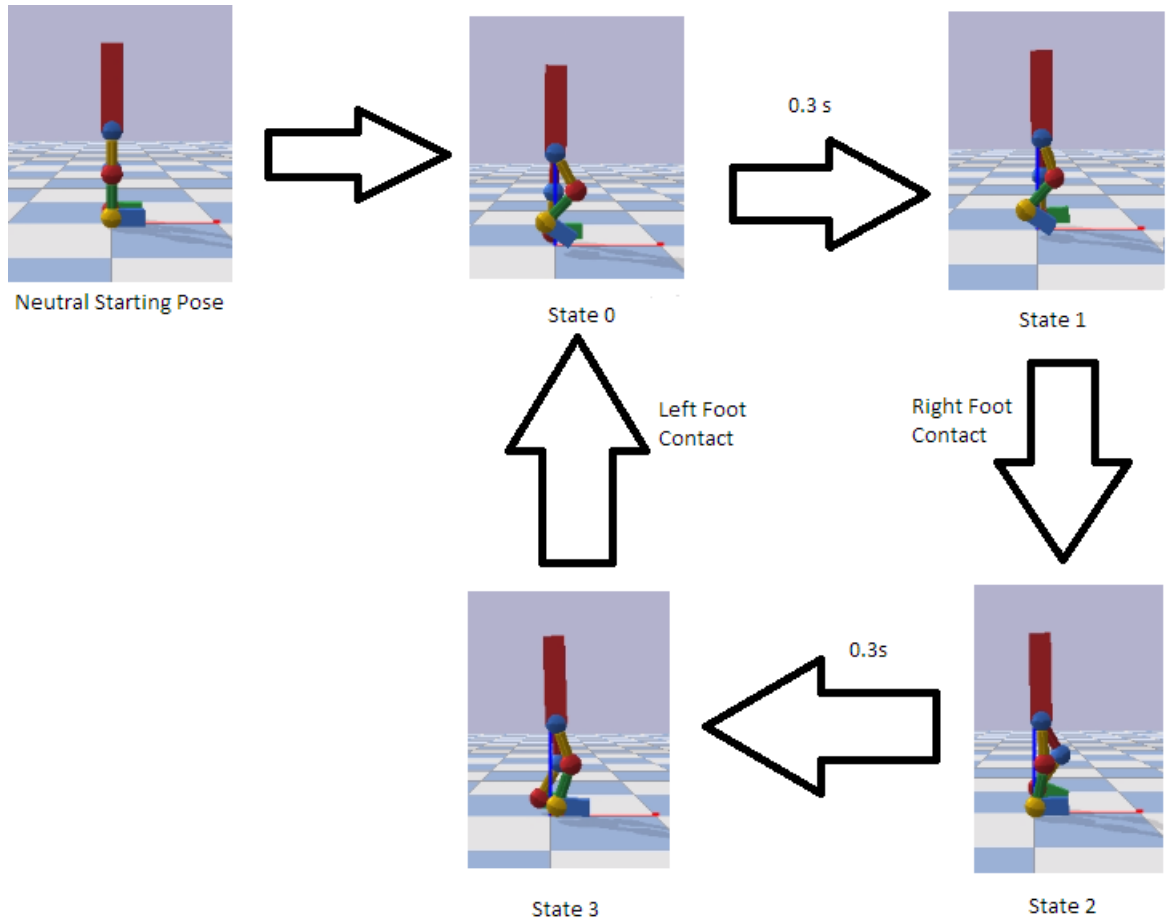


Figure 1: Visual representation of the character moving through each of the four states of the finite state machine as well as the transitions between the states.

Table 1: State Descriptions for the Finite State Machine

State	Swing Leg	Stance Leg	State Transition
0	Right	Left	$\Delta t = 0.3s$
1	Right	Left	right foot makes contact with the ground
2	Left	Right	$\Delta t = 0.3s$
3	Left	Right	left foot makes contact with the ground

also results in a virtual PD controller operating with respect to the world coordinates to calculate the swing hip torque τ_{swing} . Since we cannot apply any external torques to the character both of these torques have to be the result of internal torques only. This can be achieved by utilizing the fact that the swing and stance hip torques (τ_{stance}) are calculated separately. We can then require that the net torque seen by the torso is in fact a result of the swing and stance hip torques

$$\tau_{torso} = -\tau_{stance} - \tau_{swing}, \quad (2)$$

and can consequently rearrange Eq. 2 to calculate the torque for the stance hip. This ensures that the torques remain internal and satisfies the desired behaviour.

2.3 Balance Feedback

A key component to the control strategy is the balance feedback, whose aim is to try and help the character’s balance as it walks. The main strategy for achieving this is to apply a feedback law that affects the placement of the swing foot. Intuitively we would like to see behaviour where if the character was falling forward a larger step would be taken forward and if falling backwards, a smaller step to try and maintain balance. We can achieve this by modifying the original swing hip’s target angle to be dependent on the position and velocity of the torso’s center of mass. This can be done by applying the following feedback term to the swing hip

$$\Theta_d = \Theta_{d0} + c_d d + c_v v. \quad (3)$$

In this equation we calculate a new target angle for the swing hip based on the original desired angle Θ_{d0} , the horizontal distance between the stance ankle and the torso’s center of mass d , and the forward velocity of the center

of mass v . Two more gain parameters are introduced into the model as a result of this feedback, c_d and c_v . When the character is moving slowly c_d has a more significant impact on the balance control and consequently c_d is often much larger than c_v . Both d and v are needed since it is the combination of these parameters that fully describes the current position of the character. Including both allows for balance control that is responsive to the torso pitching a large distance slowly and pitching quickly but over perhaps a smaller distance.

2.4 Character Representation in Robotic Languages

There are a few different options available for the format one can use to represent a character for a simulation. This project explored two: Unified Robot Description Format (URDF) XML [9] and MuJoCo XML [5]. Both of these formats are supported by PyBullet for parsing/loading, and both come from sources that integrate these formats into their own physics simulators. While both of these formats accomplish the same goal of providing a representation for the character they are different in subtle ways.

The difference most relevant to this project is their treatment of constraining a body to 2D. In URDF you cannot specify constraints on the body in the global frame using the XML. URDF therefore places the task of constraining the body onto the physics simulator itself. This became a problem because the Bullet functionality for constraining characters is not exposed in the PyBullet implementation. PyBullet does provide some functionality for creating constraints but it is limited to prismatic, fixed, point to point, and gear joints none of which provide the desired behaviour of a hinge joint. This means it was not immediately clear how to constrain the character to 2D using URDF and PyBullet together, and after a large amount of frustration it became clear that switching the character representation was the only option.

MuJoCo was the next choice and the format that was eventually used in this project because it allows the body to be constrained to 2D in the XML specification, which PyBullet could parse in and adhere to. In the XML limits on the joints, the geometry of the links, and the masses of each link are defined. For the character used in the project the link masses are in Table 2 and the joint limits are given in Appendix A with the rest of the detailed code documentation.

Table 2: Link Masses

Link	Mass(kg) for each
Torso	15
Thigh	7
Shin	5
Foot	1
Hips, Knees, Ankles	0.5

2.5 PyBullet and Debugging

As mentioned in the previous section PyBullet is a python wrapper for the C++ Bullet library. As a result of this only some components of the Bullet library are available to PyBullet users. This makes it extremely difficult to find resources when trying to debug an issue or weird behaviour. Often forums will be focused on using Bullet only and the solutions provided by other users requires Bullet functionality not exposed in PyBullet. Furthermore Bullet is not popular enough that all problems encountered have solutions available online. As an example, if you make the time step of the simulation larger the character floats up off the ground and into the air, no longer adhering to the gravity or physics of the simulation. I suspect this has something to do with the integrators being unable to produce valid approximations but there was no solution or explanation of this phenomenon anywhere online.

Excluding obvious incorrect behaviour debugging these systems are extremely tedious and frustrating. For the most part trying to assess and understand the behaviour you are seeing in your character is done visually and through print statements. PyBullet does have some debugging capabilities such as being able to put lines and text in the GUI, as well as change the camera and visualizations. The most "useful" debugging ability is to create a slider which allows you to dynamically change a parameter. Personally I did not use any of these debugging tools since there are a large number of parameters that are all interdependent and it's easier to modify things manually. For example if you want a walk to lift the knees higher you need to modify the hip, knee, and ankle target angles simultaneously. One of the aspects of projects like this that is generally under-reported in academic papers is the amount of time that goes into manually trying to find these parameters. Debugging these systems boils down to running simulations repeatedly and trying to fine tune based off of what appeared to go wrong. Of course base

starting values can be approximated by using angles that seem reasonable in the real world but all of the fine tuning is done by hand. Furthermore, the fine tuning gets more complicated when you include the more macro level parameters like k_p , k_d , c_d , and c_v . When trying to achieve the most optimal motion these parameters can also play a huge part in the behaviour achieved. Overall, PyBullet does not seem to provide any sort of meaningful structure to make this process any easier and manually tuning parameters appears to be the most common strategy.

Another issue with debugging these systems is since you have a layered representation of the character in XML being loaded into the simulator, another source for issues is introduced. For example the MuJoCo representation, while better for constraining the character, was not without its' own frustrations. After constraining the body to 2D the character was exhibiting weird behaviours where its' legs would not fall to the ground if it was lying on its' back, choosing instead to stick up in the air. This is clearly the wrong behaviour as we would expect gravity to be pulling the legs towards the ground and for the character to lie flat on the plane. It should be noted that the URDF character did not have this problem even though they were built out of the same geometries. Again there were no resources available to ascertain why the MuJoCo character was behaving strangely. After many hours of painstakingly trying to narrow down the cause of this behaviour it became apparent the only change needed was the geometry of the legs.

In the initial representation the thigh and shin segments were made out of rectangles. When these components were switched to capsules then the MuJoCo character began to behave in the same manner as the URDF one (which was still using rectangles). I believe this is due to some sort of internal collision detection that was occurring between the different leg segments in the character. This indicates that the way collision detection was being done for the MuJoCo character vs the URDF character was somehow different and it is minor details like this that are incredibly frustrating to deal with and often go undocumented.

2.6 Process For Finding Parameters

As mentioned above finding the parameters was the main goal of this project and was done manually. Since the parameters are pretty specific to the simulator and character, it is reasonable to assume this process will occur for every new project that is not built off of a pre-existing model. I used the following technique to find the parameters. First is to do a rag doll test

with your character to ensure the links and joints are behaving the way you expect them to. The rag doll test consists of dropping your character into the world with no torques driving the joints. One would expect to see loose limbs that flop around being acted on solely by gravity. We do this test to ensure there's no forces on the joints being generated by the character representation and to ensure joint limits and body constraints are being respected.

The next step is to perform a test in which you only drive the hip joints with a sinusoidal wave function. The purpose of this is to ensure that you can drive the joints and they look reasonable and responsive. The sinusoidal wavefunction is useful for this test because it will generate a nice swinging motion in the legs in a rhythmic, expected way. It is at this stage that you will establish values for k_p and k_d . At this point the system has no knowledge of any of the other parameters so you can solely focus on these two. For the sake of this project $\frac{k_p}{k_d}$ was kept at a constant value of 10 to make it easier to work with. In this stage you want to look at the response of the joints to the torque. If you are seeing very small motions that is a good indication that your gains need to be larger, if you are seeing incredibly erratic behaviour that is a good indication your gains are too large. As with all parameters in this project, you try to converge to values that create motion that looks "good enough" to you.

Once you have established "good" k_p and k_d it is now time to set up the bulk of the project and introduce the finite state machine and state dependent torques without the balance feedback. This introduces a lot of parameters all at once. I used the values found in the original SIMBICON paper [8] as a starting point for my target angles but it wouldn't be unreasonable to estimate some starting values based off a walking gait. Using these original values generated a walk that was absolute garbage where the character seized and fell over immediately. After some poking around it turned out that all of the target angles needed to be multiplied by a value of -1. This was due to the fact the reference frame for all of my joint rotations was different from the one used in the paper by 180 °. This is a perfect example of how these parameters do not easily transfer between projects.

After making the switch the character moved in a more reasonable way, yet still did not walk in a balanced manner. This is now where the bulk of the manual fiddling with parameters happens. The goal in this stage is to get a walk that can go a few steps before falling over. Often times I found that I needed to make changes to both the swing hip and swing knee target angles if I wanted a productive change in my walk gait. Those two parameter

dictate most of the swing leg movement and was where the bulk of the tuning took place. Like in the previous section these parameters are tuned by eye converging towards a walk you think looks good. For example, the first walk gait that I got to work and be stable enough to walk off the plane had problems because the knees weren't driving high enough, and the character shuffled more than walked. Having found that gait I used it as a starting point to develop a gait where the knees picked up higher off the ground when it moved, but it no longer could walk as far. In general if a motion is too small you'll want to make target angles larger, and if motion is very spastic you'll want to make them smaller.

Once you have a figure that can walk a few steps by itself without falling over you can finally add in the balance control which will introduce the c_d and c_v parameters. As with the target angles I used the values provided in the SIMBICON framework as a starting point. These values you want to tune such that you see improvement in your walking gait, mainly that the character can walk farther without falling. Unfortunately after introducing these parameters it is very likely that you'll need to go back and make some modifications to your target angles as well, meaning that finding the optimum values for these parameters involves all the ones that came before it. The hope is that after having gone through the previous stage these modifications will need to be small and you've already got lots of experience with modifying them.

3 Results and Discussion

Tables 3 and 4 contain the main results of this project, the target angles and parameter values used. Using these parameters the figure is capable of walking until it falls near the edge of the plane. Figure 2 is a video that shows the character walking on the plane. As a side note you will need to view the PDF in Adobe Reader in order for the video to play. The balance feedback helps it move but was not strenuously tested by the environment. For example the plane it walks on is flat, and there are no physical obstacles that the character encounters. The values for k_p and k_d were selected by hand based off the fact that they allowed for large enough movement of the links to get walking behaviour. The balance feedback terms were chosen by first trying to optimize the target angles and PD parameters as much as possible and then manually tuning the balance terms such that they improved the motion. Weird behaviour is seen if the character falls or gets out of the pattern of motion and Fig. 3 is a video example of that. Often times the character will fall and flail about on the ground but other times the character will freeze in an odd position where it seems like neither the simulation nor gravity are actually working. As mentioned above trying to debug this problem lead to an unresolved issue with PyBullet where the simulator was behaving weirdly and I couldn't figure out how to resolve it.

Table 3: Target Angles

State	Target Angles	Angle(rad)
0,1,2,3	Torso	0
0,2	Swing Hip	0.7
	Swing Knee	-1.3
	Swing Ankle	0.2
	Stance Knee	-0.05
	Stance Ankle	0.2
1,3	Swing Hip	-0.7
	Swing Knee	-0.05
	Swing Ankle	0.2
	Stance Knee	-0.1
	Stance Ankle	0.2

Figure 2: Video demonstrating the character walking on the plane.

Figure 3: Video demonstrating what happens when the character falls and displays erratic behaviour.

Table 4: Parameters

State	Parameter	Value
0,1,2,3	k_p	800 Nm/rad
0,1,2,3	k_d	80 Nm/rad
0,2	c_d	0
	c_v	0.2
1,3	c_d	2.2
	c_v	0

4 Conclusion

In conclusion this project shows that the SIMBICON framework can be reimplemented in a newer physics simulator to achieve balanced 2D bipedal motion. Further it shows that the techniques are valid and an excellent place to start in building more complex motions in higher dimensions. However when using these techniques, but starting a project from scratch, you can expect to spend some time finding parameters that work for your particular set-up and character. With regards to using PyBullet, the advantages were ease of use, especially if one is not familiar with C++, but the disadvantages were the limited functionality and lack of debugging tools. As seen with this project even though SIMBICON provides all the necessary components the parameters found were different enough that some time and effort was put into finding them. This exposes one of the weak points in physics-based animation, these systems are extremely specific and do not generalize easily across different simulators or characters. Since the walking biped is such an important problem it is feasible that after perfecting the system once you could reuse it for a larger scaled project. However there are many aspect of the motion like falling behaviour and obstacle handling that would introduce even more complexity into the system and even more manual parameter tuning would be required.

5 Further Works

The simple biped locomotion control presented in this paper can easily be expanded into many avenues for further works. The first and most obvious of which is to control the motion in 3D instead of the 2D model presented here. Removing the constraint on the body would introduce another dimension of balance control that would need to be implemented and optimized, allowing for steps to the side to help keep the figure upright. When working with this 2D model one could use optimization routines to try and find the set of parameters which produces the longest upright walking time. Stochastic policy search, cyclic coordinate decent and covariance matrix adaptation are all methods that could be applied to finding the particular balance parameters, c_d and c_v for optimal walking. Another expansion of this model is different gaits and walking terrain. For example running, walking with high knees, jumping, and even more complex movements could be implemented using the finite state machine framework. Furthermore inclined or bumpy terrain as well as external forces acting on the body could be used to further push the balance and locomotion control. Finally models like these can be used to bridge the gap between simulation and reality. The locomotion control can be applied to real life robots and these models can help guide the way in which their locomotion is developed.

References

- [1] T. Geijtenbeek and N. Pronost, “Interactive character animation using simulated physics: A state of the art review,” *Computer Graphics Forum*, vol. 31, no. 8, pp. 2492–2515, 2012.
- [2] F. Multon, L. France, M.-P. Cani-Gascuel, and G. Debunne, “Computer animation of human walking: a survey,” *The Journal of Visualization and Computer Animation*, vol. 10, no. 1, pp. 39–54.
- [3] C. Fares and Y. Hamam, “Collision detection for rigid bodies: A state of the art review,” *GraphiCon 2005*, 2005.
- [4] E. Coumans and Y. Bai, “Pybullet and bullet.” Available at <https://pybullet.org/wordpress/> (2018/03/25).
- [5] E. Todorov, “Mujoco.” Available at <http://www.mujoco.org/> (2018/03/25).
- [6] R. Smith, “Open dynamics engine.” Available at <http://www.ode.org/> (2018/03/25).
- [7] K. Byl and R. Tedrake, “Approximate optimal control of the compass gait on rough terrain,” in *2008 IEEE International Conference on Robotics and Automation*, pp. 1258–1263, May 2008.
- [8] K. Yin, K. Loken, and M. van de Panne, “Simbicon: Simple biped locomotion control,” *ACM Trans. Graph.*, vol. 26, no. 3, p. Article 105, 2007.
- [9] O. S. Project, “Unified robot description format (urdf).” Available at <http://wiki.ros.org/urdf> (2018/04/01).

A Code and Documentation: Character Representation

In the following appendix the MuJoCo XML code for the character is presented as well as some high level documentation focusing on explaining the key lines of code and their motivations.

A.1 MuJoCo XML code

```
1 <mujoco model="legs">
2   <compiler angle="degree" coordinate="global" />
3   <default>
4     <joint stiffness="5" damping="5" />
5   </default>
6   <worldbody>
7     <body name="base">
8       <joint armature="0" axis="1_0_0" damping="0" limited
          ="false" name="ignorex" pos="0_0_0" stiffness="0"
          type="slide" />
9       <joint armature="0" axis="0_0_1" damping="0" limited
          ="false" name="ignorez" pos="0_0_0" stiffness="0"
          type="slide" />
10      <joint armature="0" axis="0_1_0" damping="0" limited
          ="false" name="ignorey" pos="0_0_0" stiffness="0"
          type="hinge" />
11      <geom name="base" size="0.1_0.2_0.4" type="box" mass
          ="15" />
12
13      <!-- Beginning of right leg -->
14      <body name="right_hip">
15        <geom name="right_hip_geom" size="0.1" type="
          sphere" pos="0_-0.15_-0.4" mass="0.5" />
16        <body name="right_thigh">
17          <joint axis="0_1_0" name="
          right_hip_to_right_thigh" pos="0_-0.15_
          -0.4" limited="true" range="-90_90" type="
          hinge" />
18          <geom name="right_thigh_geom" fromto="0_
          -0.15_-0.5_0_-0.15_-0.8" size="0.05" type
          ="capsule" mass="7" />
19
20          <body name="right_knee">
21            <geom name="right_knee_geom" size="0.1"
          type="sphere" pos="0_-0.15_-0.8" mass
          ="0.5" />
22
23            <body name="right_shin">
```



```

24         <joint axis="0_1_0" name="
           right_knee_to_right_shin" pos="0_
           0_-0.8" limited="true" range="0_
           90" type="hinge"/>
25     <geom name="right_shin_geom" fromto=
           "0_-0.15_-0.9_0_-0.15_-1.2" size=
           "0.05" type="capsule" mass="5"/>
26
27     <body name="right_ankle">
28         <geom name="right_ankle_geom"
           size="0.1" type="sphere" pos=
           "0_-0.15_-1.2" mass="0.5"/>
29
30         <body name="right_foot">
31             <joint axis="0_1_0" name="
               right_ankle_to_right_foot
               " pos="0_0_-1.2" limited=
               "true" range="-15_90"
               type="hinge"/>
32             <geom name="right_foot_geom"
               pos="0.15_-0.15_-1.2"
               size="0.15_0.05_0.075"
               type="box" mass="1"/>
33         </body>
34     </body>
35 </body>
36 </body>
37 </body>
38 </body>
39 <!-- Beginning of left leg -->
40 <body name="left_hip">
41     <geom name="left_hip_geom" size="0.1" type="
           sphere" pos="0_0.15_-0.4" mass="0.5"/>
42     <body name="left_thigh">
43         <joint axis="0_1_0" name="
           left_hip_to_left_thigh" pos="0_0.15_-0.4"
           limited="true" range="-90_90" type="
           hinge"/>
44         <geom name="left_thigh_geom" fromto="0_0.15_
           -0.5_0_0.15_-0.8" size="0.05" type="
           capsule" mass="7"/>
45
46         <body name="left_knee">
47             <geom name="left_knee_geom" size="0.1"
               type="sphere" pos="0_0.15_-0.8" mass=
               "0.5"/>
48
49             <body name="left_shin">

```

```

50      <joint axis="0_1_0" name="
        left_thigh_to_left_shin" pos="0_0
        _-0.8" limited="true" range="0_90
        " type="hinge"/>
51      <geom name="left_shin_geom" fromto="
        0_0.15_-0.9_0_0.15_-1.2" size="
        0.05" type="capsule" mass="5"/>
52
53      <body name="left_ankle">
54          <geom name="left_ankle_geom"
            size="0.1" type="sphere" pos=
            "0_0.15_-1.2" mass="0.5"/>
55
56          <body name="left_foot">
57              <joint axis="0_1_0" name="
                left_ankle_to_left_foot"
                pos="0_0_-1.2" limited="
                true" range="-15_90" type
                ="hinge"/>
58              <geom name="left_foot_geom"
                pos="0.15_0.15_-1.2" size
                ="0.15_0.05_0.075" type="
                box" mass="1"/>
59          </body>
60      </body>
61  </body>
62  </body>
63  </body>
64  </body>
65  </body>
66  </worldbody>
67 </mujoco>

```

A.2 Character Representation Documentation

Lines 8-10 are the most important in this representation since they are the ones that constrict the body to 2D. Here we construct the constraint out of three separate joints, one for each dimension. Along the x and z axis the worldbody is constrained with a slide joint, which gives the worldbody one degree of freedom along each axis, which results in unconstrained motion in the 2D x,z plane. Along the y axis we constrain the worldbody to a hinge joint, which gives the worldbody one degree of rotational freedom around the y axis. The overall effect of these joint constraints is that the worldbody is constrained to 2D motion where it can still fall forward and backward but not to the sides.

MuJoCo uses a nested representation to define their kinematic tree of

parent/child relationships. Here the parent/child relationship is enforced by the child relationship already present in XML. So to be a child of a link means you must be a child of your parents' link tag, which means you must be a nested XML element. In this way we can define two children to be at the same level, for example left and right hips, while still allowing each of those children to have children of their own, for example left and right thighs. In contrast to URDF where each link is defined separately and you must specify joints to link them together, if no joint is specified between a parent and its' child a fixed joint is generated by default. At the highest level is the worldbody which in our case is the torso, now constrained to 2D, and is the only part of the character that exists in relation to the world frame directly.

The `<joint>` tag: In this tag we can define which axis the rotation occurs around and where the joint is located. Placing the joint can require some manual tuning. Often it helps if you draw out a diagram with the measurements of the various links to get a rough estimate of where you want the hinging to take place. It is important to place the joint in a place where the links hinge in a natural looking way without running into issues of internal collisions. It is here that we also limit the joints, with the joint limits given in degrees. The limits were selected to mirror the true limits those joints experience on the human body.

The `<geom>` tag: here we finally define the geometries that make up the visual components of the character. It is very important to note that capsules must be used to make up the main portions of the legs rather than rectangles. Initially they were made of rectangles and there was very weird behaviour in the legs due to internal collisions between the legs and sphere "joints" which were only resolved when the geometry was changed. The feet could however remain rectangles since they did not seem to experience this behaviour.

B Code and Documentation: Main Program

In the following appendix the Python code for the simulation is presented. The documentation follows and walks the reader through the flow of the program as well as how previously discussed techniques were implemented.

B.1 Python Code

```
1 import pybullet as p
2 import pybullet_data
3 import time
4
5 physicsClient = p.connect(p.GUI) # or p.DIRECT for non-
    graphical version
6 p.setAdditionalSearchPath(pybullet_data.getDataPath()) # used
    by loadURDF
7 planeId = p.loadURDF("plane.urdf")
8 legsStartPos = [0, 0, 2]
9 p.setGravity(0, 0, -10)
10 legsStartOrientation = p.getQuaternionFromEuler([0, 0, 0])
11 legsID = p.loadMJCF("legs.xml")[0]
12 p.resetBasePositionAndOrientation(legsID, legsStartPos,
    legsStartOrientation)
13
14 # start camera view perpendicular to figure
15 p.resetDebugVisualizerCamera(cameraDistance=4, cameraYaw=0,
    cameraPitch=0, cameraTargetPosition=[0, 0, 1])
16
17
18 # joint and link numbers
19 base_link = 3
20
21 right_hip_joint = 5
22 right_knee_joint = 8
23 right_ankle_joint = 11
24 right_ankle_link = 10
25 right_foot_link = 12
26
27 left_hip_joint = 14
28 left_knee_joint = 17
29 left_ankle_joint = 20
30 left_ankle_link = 19
31 left_foot_link = 21
32
33 # target angles
34 base_angle = 0
35
36 swing_hip_0_2 = 0.7
37 swing_knee_0_2 = -1.3
38 swing_hip_1_3 = -0.7
39 swing_knee_1_3 = -0.05
40 swing_ankle_0_2 = 0.2
41 swing_ankle_1_3 = 0.2
42
43 stance_knee_0_2 = -0.05
```

```

44 stance_ankle_0_2 = 0.20
45 stance_knee_1_3 = -0.10
46 stance_ankle_1_3 = 0.2
47
48 # PD controller constants
49 kp = 800
50 kd = 80
51 cd_0_2 = 0
52 cv_0_2 = 0.2
53 cd_1_3 = 2.2
54 cv_1_3 = 0
55
56 # simulation parameters
57 time_step = 0.01
58 p.setTimeStep(time_step)
59 foot_contact_tol = 0.0001
60
61
62 def stance_leg_torque(swing_hip_torque):
63     body = p.getJointState(legsID, base_link)
64     tau_body = kp*(-base_angle - body[0]) - kd * body[1]
65     tau_stance = -tau_body - swing_hip_torque
66     return tau_stance
67
68
69 def balance_feedback(target_angle, stance_ankle_link, cd, cv):
70     body = p.getLinkState(legsID, 3, computeLinkVelocity=1)
71     body_position = body[0]
72     body_velocity = body[6][0]
73     ankle_position = p.getLinkState(legsID, stance_ankle_link)
74         [0]
75     d = body_position[0] - ankle_position[0]
76
77     return target_angle + cd*d + cv*body_velocity
78
79
80 def in_contact(contact_points, contact_links):
81     links_in_contact = []
82     for contact_point in contact_points:
83         links_in_contact.append(contact_point[4])
84
85     for link in contact_links:
86         if link in links_in_contact:
87             return 1
88
89     return 0
90
91

```

```

92 def set_torque_0():
93     # swing leg
94     right_hip = p.getJointState(legsID, right_hip_joint)
95
96     # with feedback
97     swing_hip_angle = balance_feedback(-swing_hip_0_2,
98         left_ankle_link, cd_0_2, cv_0_2)
99     tau_r_hip = kp * (swing_hip_angle - right_hip[0]) - kd *
100         right_hip[1]
101
102     # without
103     # tau_r_hip = kp * (swing_hip_0_2 - right_hip[0]) - kd *
104         right_hip[1]
105
106     right_knee = p.getJointState(legsID, right_knee_joint)
107     tau_r_knee = kp * (-swing_knee_0_2 - right_knee[0]) - kd *
108         right_knee[1]
109
110     right_ankle = p.getJointState(legsID, right_ankle_joint)
111     tau_r_ankle = kp * (-swing_ankle_0_2 - right_ankle[0]) - kd
112         * right_ankle[1]
113
114     # stance leg
115     tau_l_hip = stance_leg_torque(tau_r_hip)
116
117     left_knee = p.getJointState(legsID, left_knee_joint)
118     tau_l_knee = kp * (-stance_knee_0_2 - left_knee[0]) - kd *
119         left_knee[1]
120
121     left_ankle = p.getJointState(legsID, left_ankle_joint)
122     tau_l_ankle = kp * (-stance_ankle_0_2 - left_ankle[0]) - kd
123         * left_ankle[1]
124
125     # update forces
126     p.setJointMotorControlArray(legsID, [right_hip_joint,
127         right_knee_joint, right_ankle_joint, left_hip_joint,
128         left_knee_joint, left_ankle_joint], controlMode=p.
129         TORQUECONTROL, forces=[tau_r_hip, tau_r_knee,
130         tau_r_ankle, tau_l_hip, tau_l_knee, tau_l_ankle])
131     p.stepSimulation()
132
133
134 def set_torque_1():
135     # swing leg
136     right_hip = p.getJointState(legsID, right_hip_joint)
137
138     # with feedback
139     swing_hip_angle = balance_feedback(-swing_hip_1_3,
140         left_ankle_link, cd_1_3, cv_1_3)

```

```

130     tau_r_hip = kp * (swing_hip_angle - right_hip[0]) - kd *
        right_hip[1]
131
132     # without
133     # tau_r_hip = kp * (swing_hip_1_3 - right_hip[0]) - kd *
        right_hip[1]
134
135     right_knee = p.getJointState(legsID, right_knee_joint)
136     tau_r_knee = kp * (-swing_knee_1_3 - right_knee[0]) - kd *
        right_knee[1]
137
138     right_ankle = p.getJointState(legsID, right_ankle_joint)
139     tau_r_ankle = kp * (-swing_ankle_1_3 - right_ankle[0]) - kd
        * right_ankle[1]
140
141     # stance leg
142     tau_l_hip = stance_leg_torque(tau_r_hip)
143
144     left_knee = p.getJointState(legsID, left_knee_joint)
145     tau_l_knee = kp * (-stance_knee_1_3 - left_knee[0]) - kd *
        left_knee[1]
146
147     left_ankle = p.getJointState(legsID, left_ankle_joint)
148     tau_l_ankle = kp * (-stance_ankle_1_3 - left_ankle[0]) - kd
        * left_ankle[1]
149
150     # update forces
151     p.setJointMotorControlArray(legsID, [right_hip_joint,
        right_knee_joint, right_ankle_joint, left_hip_joint,
152     left_knee_joint, left_ankle_joint], controlMode=p.
        TORQUECONTROL, forces=[tau_r_hip, tau_r_knee,
153     tau_r_ankle, tau_l_hip, tau_l_knee, tau_l_ankle])
154     p.stepSimulation()
155
156
157     def set_torque_2():
158         # swing leg
159         left_hip = p.getJointState(legsID, left_hip_joint)
160         # with feedback
161         swing_hip_angle = balance_feedback(-swing_hip_0_2,
            right_ankle_link, cd_0_2, cv_0_2)
162         tau_l_hip = kp * (swing_hip_angle - left_hip[0]) - kd *
            left_hip[1]
163
164         # without
165         # tau_l_hip = kp * (swing_hip_0_2 - left_hip[0]) - kd *
            left_hip[1]
166
167         left_knee = p.getJointState(legsID, left_knee_joint)

```

```

168     tau_l_knee = kp * (-swing_knee_0_2 - left_knee[0]) - kd *
        left_knee[1]
169
170     left_ankle = p.getJointState(legsID, left_ankle_joint)
171     tau_l_ankle = kp * (-swing_ankle_0_2 - left_ankle[0]) - kd *
        left_ankle[1]
172
173     # stance leg
174     tau_r_hip = stance_leg_torque(tau_l_hip)
175
176     right_knee = p.getJointState(legsID, right_knee_joint)
177     tau_r_knee = kp * (-stance_knee_0_2 - right_knee[0]) - kd *
        right_knee[1]
178
179     right_ankle = p.getJointState(legsID, right_ankle_joint)
180     tau_r_ankle = kp * (-stance_ankle_0_2 - right_ankle[0]) - kd *
        right_ankle[1]
181
182     # update forces
183     p.setJointMotorControlArray(legsID, [right_hip_joint,
        right_knee_joint, right_ankle_joint, left_hip_joint,
184         left_knee_joint, left_ankle_joint], controlMode=p.
        TORQUECONTROL, forces=[tau_r_hip, tau_r_knee,
185         tau_r_ankle, tau_l_hip, tau_l_knee, tau_l_ankle])
186     p.stepSimulation()
187
188
189     def set_torque_3():
190         # swing leg
191         left_hip = p.getJointState(legsID, left_hip_joint)
192         # with feedback
193         swing_hip_angle = balance_feedback(-swing_hip_1_3,
            right_ankle.link, cd_1_3, cv_1_3)
194         tau_l_hip = kp * (swing_hip_angle - left_hip[0]) - kd *
            left_hip[1]
195
196         # without
197         # tau_l_hip = kp * (swing_hip_1_3 - left_hip[0]) - kd *
            left_hip[1]
198
199         left_knee = p.getJointState(legsID, left_knee_joint)
200         tau_l_knee = kp * (-swing_knee_1_3 - left_knee[0]) - kd *
            left_knee[1]
201
202         left_ankle = p.getJointState(legsID, left_ankle_joint)
203         tau_l_ankle = kp * (-swing_ankle_1_3 - left_ankle[0]) - kd *
            left_ankle[1]
204
205         # stance leg

```



```

206     tau_r_hip = stance_leg_torque(tau_l_hip)
207
208     right_knee = p.getJointState(legsID, right_knee_joint)
209     tau_r_knee = kp * (-stance_knee_1_3 - right_knee[0]) - kd *
        right_knee[1]
210
211     right_ankle = p.getJointState(legsID, right_ankle_joint)
212     tau_r_ankle = kp * (-stance_ankle_1_3 - right_ankle[0]) - kd
        * right_ankle[1]
213
214     # update forces
215     p.setJointMotorControlArray(legsID, [right_hip_joint,
        right_knee_joint, right_ankle_joint, left_hip_joint,
216         left_knee_joint, left_ankle_joint], controlMode=p.
        TORQUECONTROL, forces=[tau_r_hip, tau_r_knee,
217         tau_r_ankle, tau_l_hip, tau_l_knee, tau_l_ankle])
218     p.stepSimulation()
219
220
221     # state definitions
222     def state0():
223         t = time.time()
224         while time.time() - t < 0.3:
225             set_torque_0()
226         statel()
227
228
229     def statel():
230         no_contact = 1
231         while no_contact:
232             #swing leg right leg, stance left
233             set_torque_1()
234             contact_points = p.getContactPoints(bodyA=planeId, bodyB
                =legsID)
235             #print("contact points: " + str(contact_points))
236             if len(contact_points) > 0 and in_contact(contact_points
                , [right_foot_link, right_ankle_link]):
237                 no_contact = 0
238
239         state2()
240
241
242     def state2():
243         t = time.time()
244         while time.time() - t < 0.3:
245             set_torque_2()
246         state3()
247
248

```

```

249 def state3():
250     no_contact = 1
251     while no_contact:
252         # swing leg left leg, stance right
253         set_torque_3()
254         contact_points = p.getContactPoints(bodyA=planeId, bodyB
        =legsID)
255         #print("contact points: " + str(contact_points))
256         if len(contact_points) > 0 and in_contact(contact_points
        , [left_foot_link, left_ankle_link]):
257             contact_distance = contact_points[0][8]
258             if contact_distance < foot_contact_tol:
259                 no_contact = 0
260     state0()
261
262
263 # start the FSM with a small time delay to allow character to
fall into place
264 t = time.time()
265 while time.time() - t < 0.5:
266     p.stepSimulation()
267 state0()

```

B.2 Main Program Documentation

Throughout this piece of code `getJointState(legsID, joint_index)` returns an array of which we are interested in: index 0: the current velocity of the queried joint, and index 1: the current position.

The first 15 lines of code are necessary for loading the character and plane in as MuJoCo and URDF files respectively. As well as starting the legs slightly above the ground otherwise it loads the character midway through the plane and you have weird contact collisions happening right at the beginning of the simulation which cause the character to fly upwards erratically. Finally we start the camera perpendicular to the character to better see its' motion when walking.

Lines 21-31 are static values for the link and joints labels needed for the simulation. Figures 4 and 5 show how these are labelled for the character used. These values can be determined dynamically by iterating over all values from 0 to `getNumJoints(legsID)` and calling `getJointInfo()` for each joint, or `getLinkState()` for each link although in the link case there is no way to get the total number of links in the character. I determined these values via guessing and checking and decided to simply store them statically since the character's representation does not change.

Lines 33-54 are all the parameters needed to run the simulation, they are stored in variables so that modifying them is easy as there is only one place in the code to change the values. The parameters correspond to the values in Tables 3 and 4.

Lines 56-59 contain parameters used in the simulation. The time step is used by the integrators and the *foot_contact_tol* is used as a tolerance value for determining if a foot has made contact with the plane.

`def stance_leg_torque(swing_hip_torque)` is the first helper function whose job is to calculate the torque for the stance hip using the method discussed in Subsection 2.2 and the implementation closely follows Equation ??.

`def balance_feedback(target_angle, stance_ankle_link, cd,cv)` in this helper function we are computing the balance feedback as given in Equation 3. Here we approximate d by the difference in the x coordinates of the base and the ankle's center of mass as the positions are given in 3D coordinate space.

`def in_contact(contact_points, contact_links)` this is a simple helper function who takes in a list of links currently in contact with the plane and outputs true if any of the links are interested in (*contact_links*) is in contact with the plane. This function is used to determine if the foot or ankle is in contact with the plane for states 1 and 3.

`def set_torques_0()` is the main function in charge of calculating and setting all the torques for state 0. `def set_torques_1()`, `def set_torques_2()` `def set_torques_3()` perform the same functions for their respective states so for brevity only state 0 will be talked about in depth. Torques are calculated for each of the joints by getting the current state of the joint and using Equation 1. The final steps are to update the torques being applied to the various joints and stepping the simulation to apply them.

`def state0()` `def state2()` these two functions control the finite state machine for states 0 and 2. In these states the transition to the next state is based on an interval of time passing. During this time, the torques are repeatedly updated to move the character.

`def state1()` `def state3()` these two functions control the finite state machine for states 1 and 3. In these states the state transition is governed

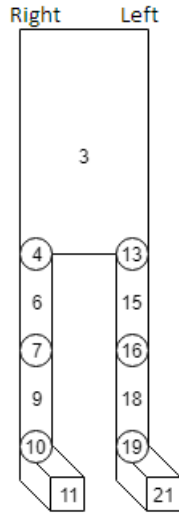


Figure 4: Diagram of how the links are labelled on the character.

by the foot making contact with the plane. Here we check to see if either the ankle or the foot is in contact with the plane and if yes we move on to the next state, otherwise we keep updating the torques. We check for both the ankle and the foot since there were issues with it not always recognizing the foot was in contact with the ground. These states are ones in which the simulation often gets stuck since it will continuously wait for the foot contact which doesn't always occur.

Line 264-267 Finally we are at the point in the program where the finite state machine is started. There is a small loop before we call `state0()`. This is to allow the character to fall until it comes in contact with the plane. This is because we initialized the character to load in above the plane, however if we immediately start the walking process while the character is in the air it has the potential to land on the ground in a funny position and the entire walking cycle is thrown off.

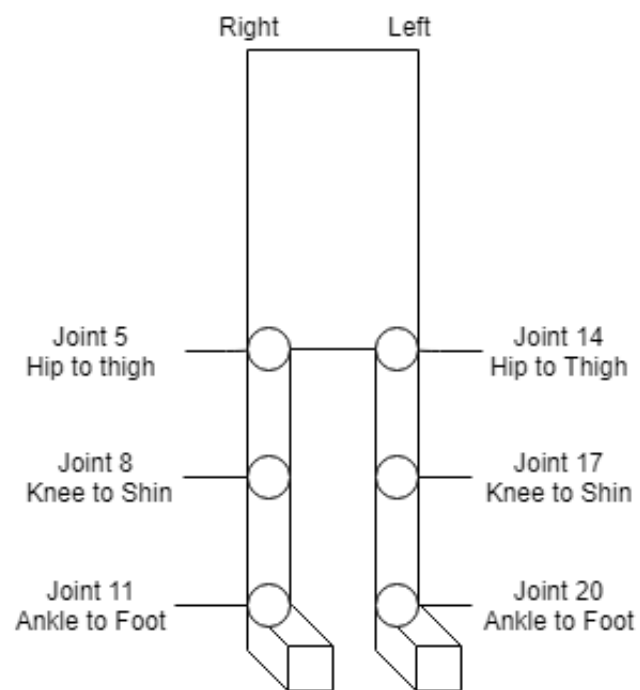


Figure 5: Diagram of how the joints are labelled on the character.