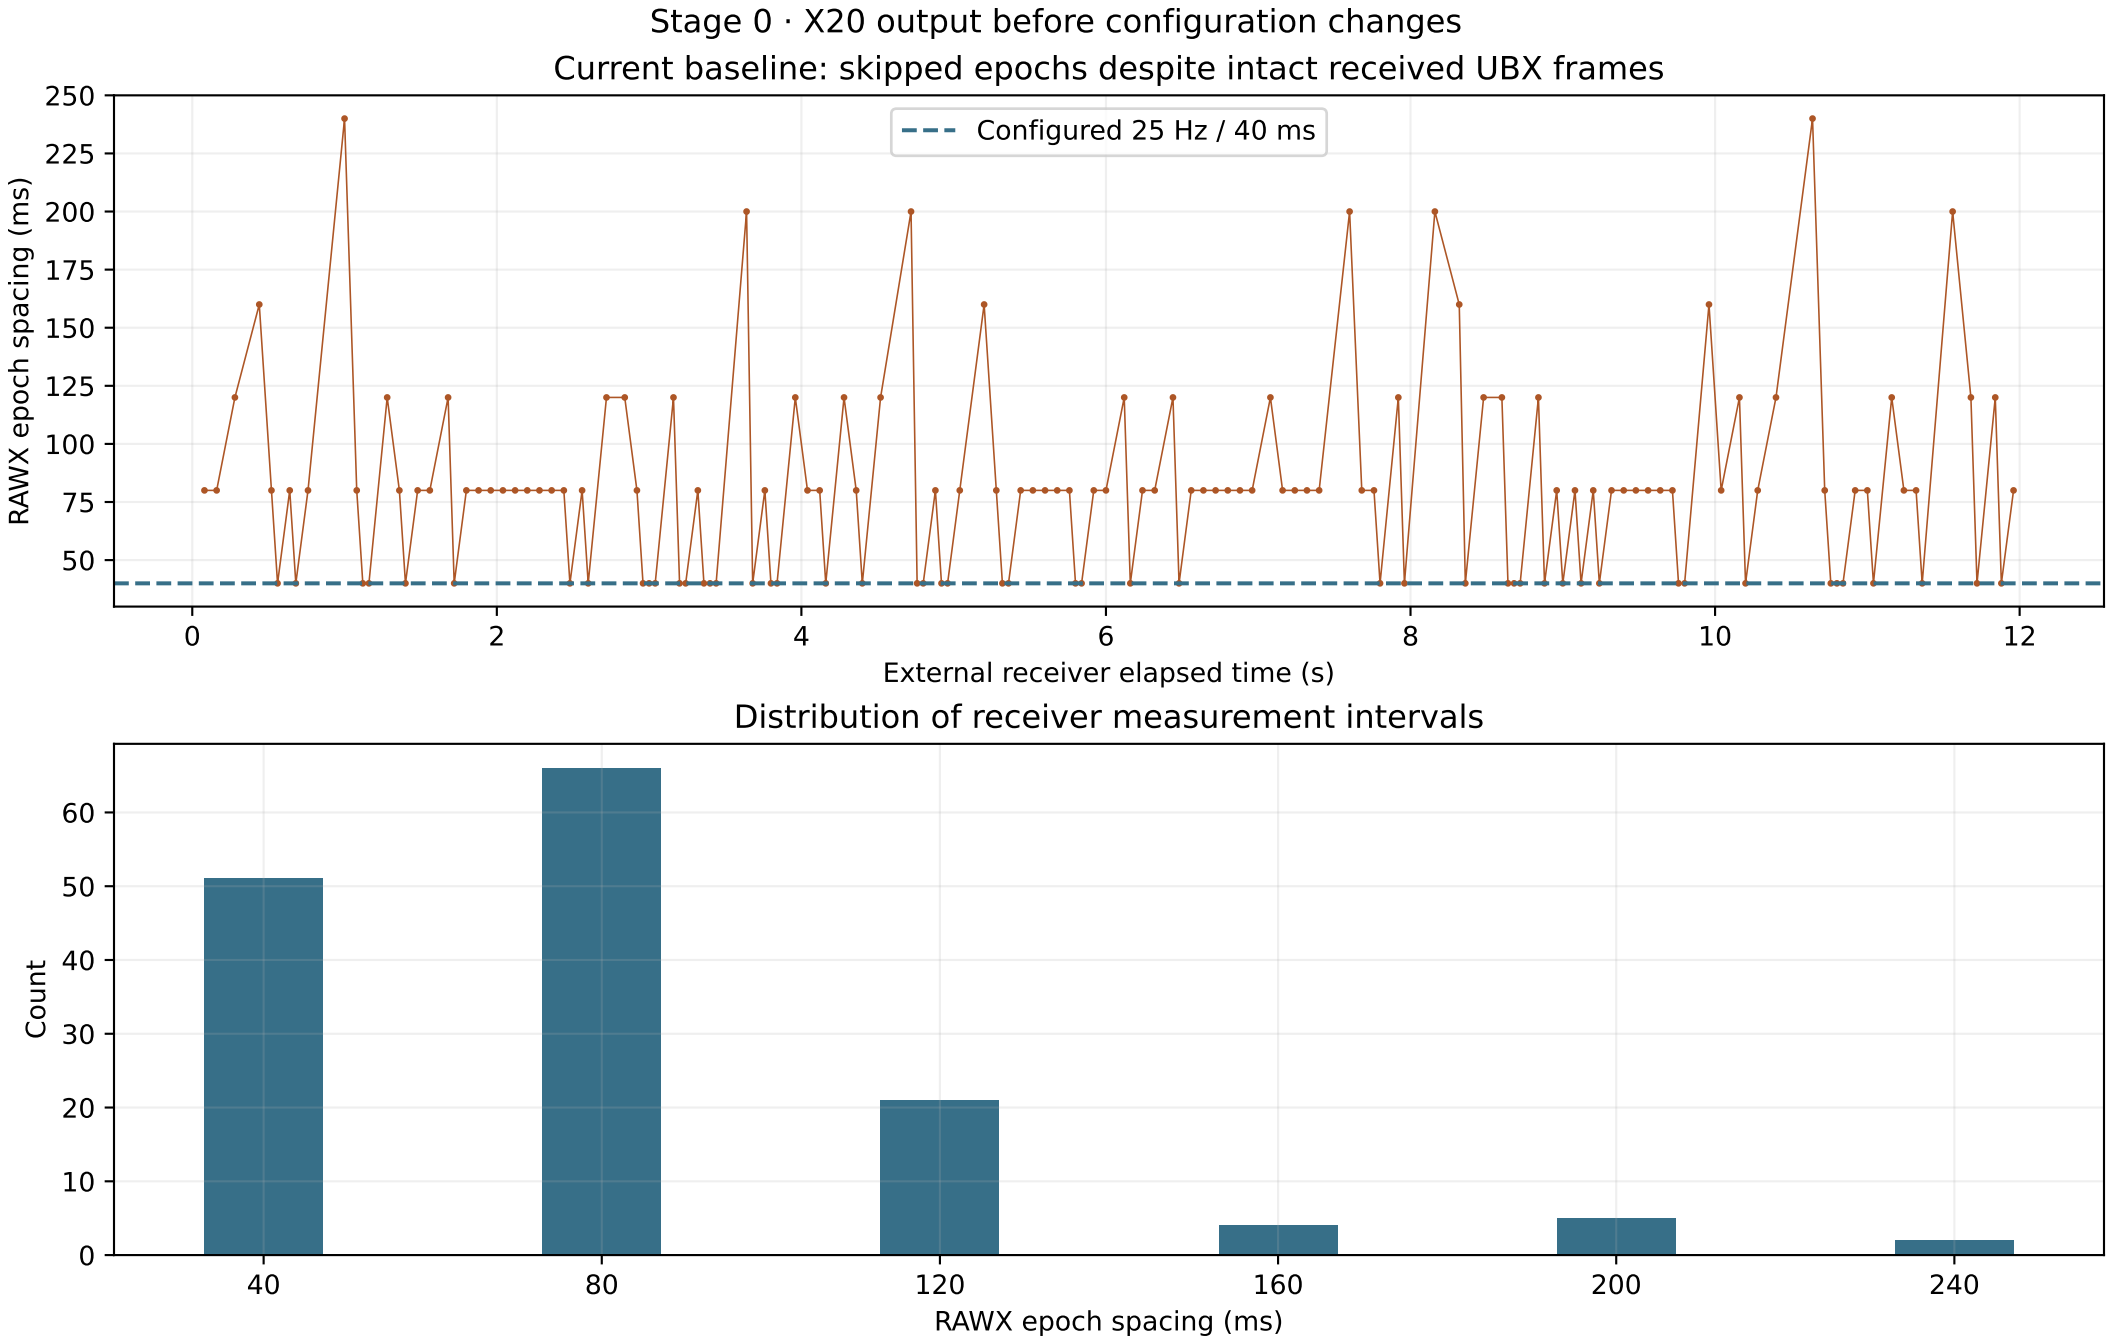
Stage 0 · X20 output before configuration changes
Current baseline: skipped epochs despite intact received UBX frames
Configured 25 Hz / 40 ms
RAWX epoch spacing (ms)
External receiver elapsed time (s)
Distribution of receiver measurement intervals
Count
RAWX epoch spacing (ms)