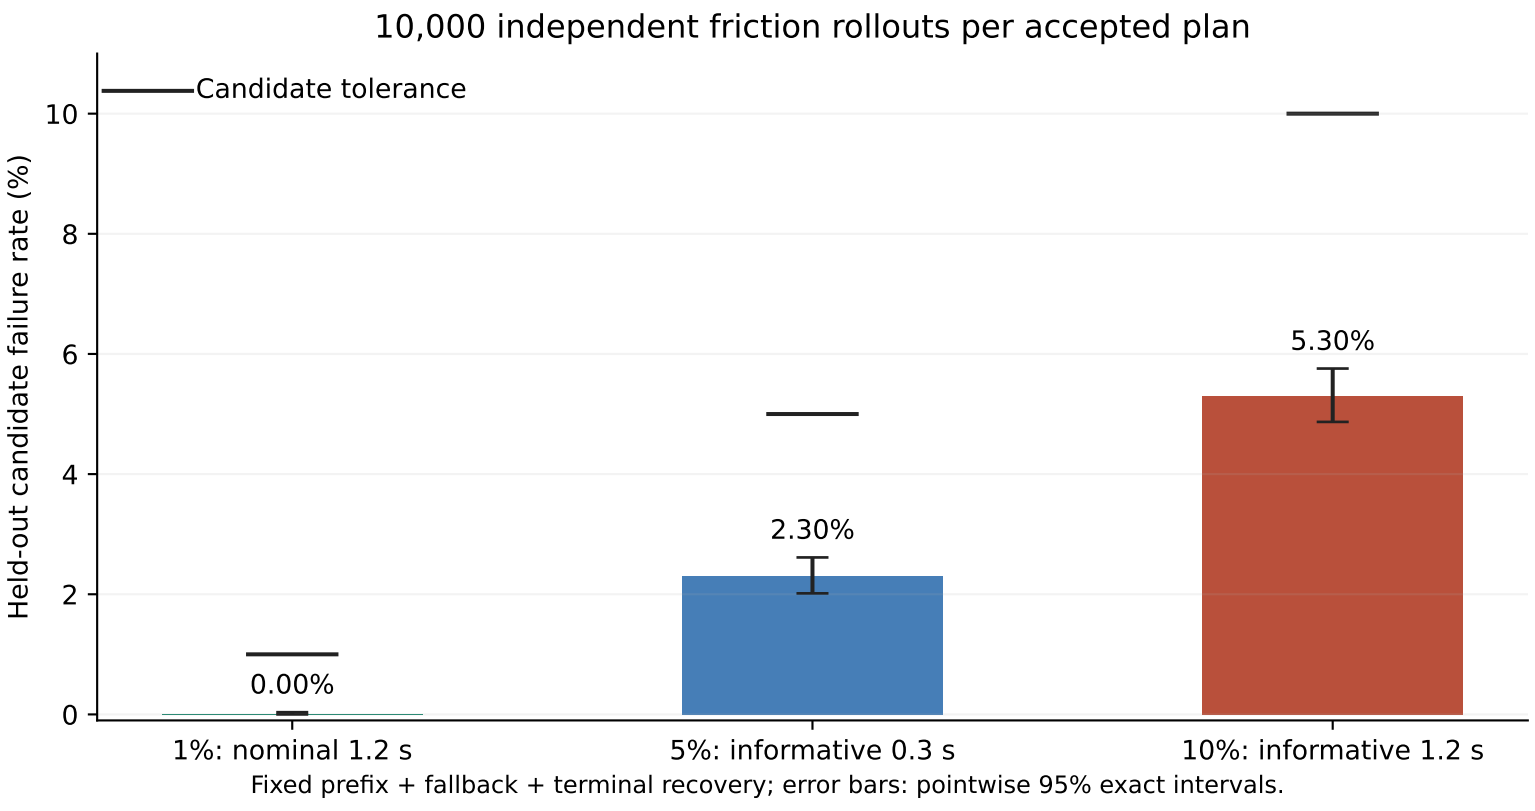
10,000 independent friction rollouts per accepted plan
Candidate tolerance
Held-out candidate failure rate (%)
0
2
4
6
8
10
0.00%
2.30%
5.30%
1%: nominal 1.2 s
5%: informative 0.3 s
10%: informative 1.2 s
Fixed prefix + fallback + terminal recovery; error bars: pointwise 95% exact intervals.