

Module 2 Mastery Assessment Lab

Introduction

In this Module 2 Performance Assessment, your focus is RIP and Static Routing configurations.

Objectives

Complete all requirements below.

Assignment

In this skills assessment, you will subnet your networks to the network requirements given and complete the addressing table below. You will then configure IP addressing for all devices.

Next you will configure RIPv2 routing for all networks except the hidden file server network.

Configure static routing so the 1st floor and 2nd floor VLANs will be able to reach the internal file server network. The internal network should not be reachable from the external ISP router.

Then configure default static routes on all 3 routers so the 1st Floor LAN, 2nd Floor LAN and Cyber Vlan 500 can reach the ISP router.


Finally, you will verify your configurations and test connectivity between end devices.

Note: The ISP router is already configured.

Required Resources

- 4 Routers (Cisco 1941 with Cisco IOS Release 15.2(4) M3 universal image or comparable)
- 3 Cisco 2960 Switches (Software (C2960-LANBASE-M), Version 12.2)
- 4 PCs (Windows 7, Vista, or XP with terminal emulation program, such as Tera Term)
- Your Computer workstation
- Cisco Packet Tracer (online)
- Provided Packet Tracer File

Topology

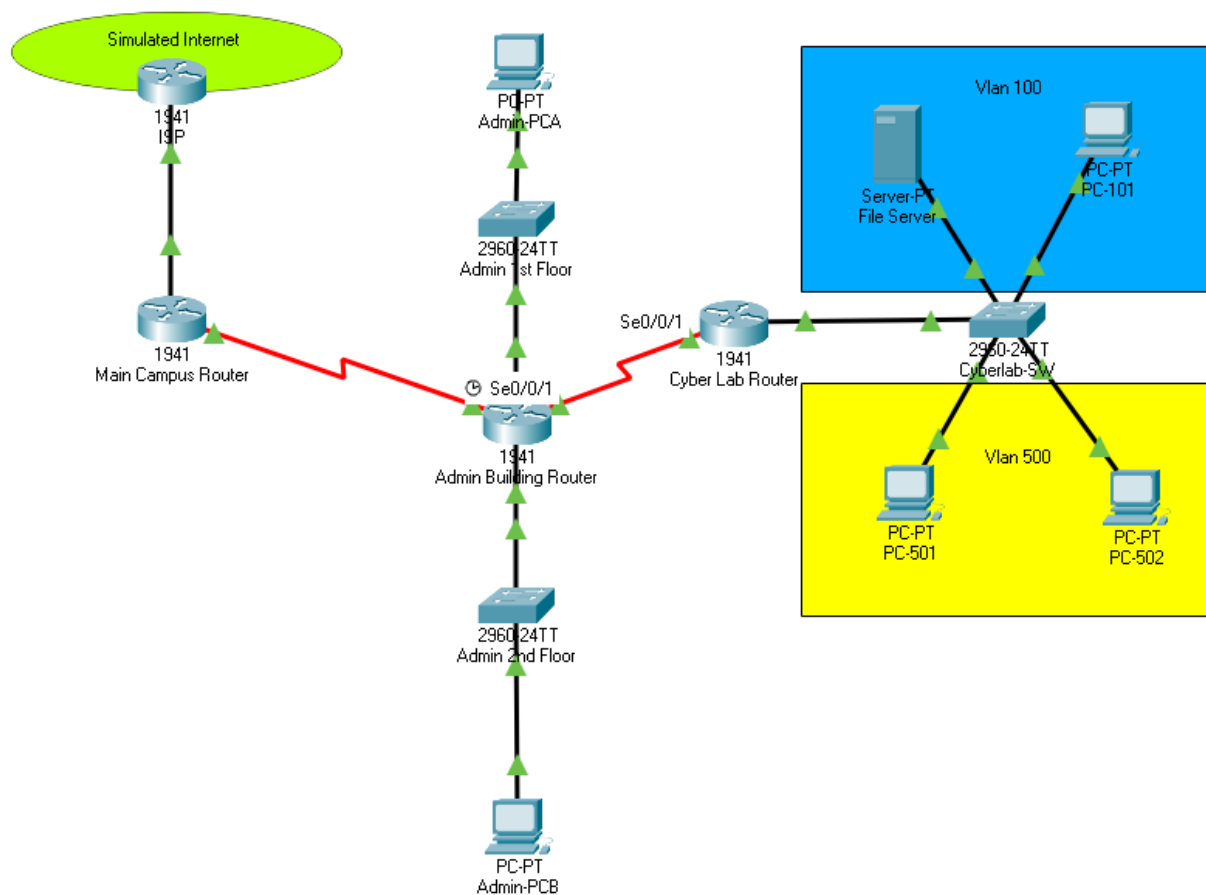

Requirements

Complete the lab in this order:

Part 1: Complete the subnetting and addressing scheme

Part 2: Configure Device Basic Settings

Part 3: Configure RIPv2 for IPv4 dynamic routing protocol

Part 4: Configure static routes to internal file server network

Part 5: Configure static routes for external connectivity to the ISP

Part 1: Complete the subnetting and addressing scheme

In this topology you need to subnet the following address into 4 subnets for the LANs. The router to router point to point links are already documented in the addressing table.

Subnet the following network in 4 subnets. **192.168.10.0 255.255.255.0**

Admin 1st Floor Lan - 100 hosts needed

Admin 2nd Floor lan - 32 hosts needed

Vlan 500 - 20 Hosts needed

Internal VLAN 100 - 4 hosts

Interface Addressing Scheme

On your router LAN interfaces use the first usable address in the corresponding subnet. (Router to Router links are already documented in the Addressing Table)

For the PC's, use the last usable address in the corresponding subnet, and in VLANs 100 use the last usable address on the file server and 2nd to last address on PC-101. VLAN 500 PCs use the last 2 addresses in the corresponding. Also configure the correct default gateways for each PC.

Complete Addressing Table Below

Addressing Table

Device	Interface	IP Address	Subnet Mask	Default Gateway	Network IP Address
ISP Router	G0/1	209.165.200.225	255.255.255.252	N/A	209.165.200. ____
MainCampusR	G0/0	209.165.200.226	255.255.255.252	N/A	
	S0/0/0	172.16.1.1	255.255.255.252	N/A	
AdminBldgR	G0/0			N/A	
	G0/1			N/A	
	S0/0/0	172.16.1.2	255.255.255.252	N/A	
	S0/0/1	172.16.2.2	255.255.255.252	N/A	
CyberlabR	S0/0/1	172.16.2.1	255.255.255.252	N/A	
	G0/0.100			N/A	
	G0/0.500			N/A	
File-Server	Fa0				
PC-101	Fa0				
PC-501	Fa0				
PC-502	Fa0				
PC-A	Fa0				
PC-B	Fa0				

Part 2: Configure Device Basic Settings

Note: The ISP router is already configured.

Main Campus Router

Hostname: MainCampusR

Disable DNS lookups

Console Line password: cyber

Privileged Exec Password: security

Configure interface S0/0/0 - 172.16.1.1 255.255.255.252

Admin Building Router

Hostname: AdminBldgR

Disable DNS lookups

Console Line password: cyber

Privileged Exec Password: security

Interface S0/0/0 - 172.16.1.2 255.255.255.252

Interface S0/0/1 - 172.16.2.2 255.255.255.252

Configure each LAN interface (G0/0 & G0/1) with the 1st usable address in the corresponding subnet.

Cyber Lab Router

Hostname: CyberlabR

Disable DNS lookups

Console Line password: cyber

Privileged Exec Password: security

Interface S0/0/1 - 172.16.2.1 255.255.255.252

Interface G0/0 - (No ip address) Trunk link for VLANs 100 & 500

Configure each LAN sub-interface (G0/0.100 and G0/0.500) with the 1st usable address in the corresponding subnet.

Admin Switch 1st Floor

Hostname Admin-FI-1

Console Line password: cyber

Privileged Exec Password: security

Admin Switch 2nd Floor

Hostname Admin-FI-2

Console Line password: cyber

Privileged Exec Password: security

Cyber Lab Switch

Hostname: Cyberlab-SW

Console Line password: cyber

Privileged Exec Password: security

Vlan Database - VLAN 100 and VLAN 500

Vlan 100 Ports - FA0/2 / FA0/5

Vlan 500 Ports - FA0/10 / FA0/11

Set port FA0/1 to trunk mode

PCs and Server

Use the last usable address in the corresponding subnet, and in VLANs 100 use the last usable address on the file server and 2nd to last address on PC-101. VLAN 500 PCs use the last 2 addresses in the corresponding. Also configure the correct default gateways for each PC.

Part 3: Configure RIPv2 for IPv4 dynamic routing protocol

Main Campus Router

Enable RIP routing protocol

Configure RIP Version 2

Advertise Network on S0/0/0 interface

Admin Building Router

Enable RIP routing protocol

Configure RIP Version 2

Advertise Networks on all interfaces

Set G0/0 and G0/1 as passive-interfaces

Cyber Lab Router

Enable RIP routing protocol

Configure RIP Version 2

Advertise Networks on S0/1, G0/0.500

Do not advertise VLAN 100 in RIP

Part 4: Configure static route to internal file server network

Admin Building Router.

Create a next-hop static route to (Vlan 100) the Internal File Server network.

Part 5: Configure static routes for external connectivity to the ISP

Main Campus Router

Configure directly connected default static route to (Simulated Internet) ISP router.

Admin Building Router

Configure directly connected default static route to (Simulated Internet) ISP router.

Cyber Lab Router

Configure directly connected default static route to (Simulated Internet) ISP router.

Verify all internal PC's can reach the internal file server. Verify all devices can ping the ISP Router (Simulated Internet) except the PCs in VLAN 100. Troubleshoot your networks until accomplished. Good Luck!

Submit Your Work:

Packet Tracer:

Submit Packet Tracer file as well as your text file with your findings and notes.

Rubric

Checklist/Single Point Mastery

<u>Concerns</u> Working Towards Proficiency	<u>Criteria</u> Standards for This Competency	<u>Accomplished</u> Evidence of Mastering Competency
	Criteria #1: Basic router and switch and PC configs (40 pts)	Configure basic router configs needed for all 3 routers. Configure CyberLab switch VLAN and Trunking needed. (40 pts)

	Criteria #2: Configure default static routes needed for all 3 routers.(10 pts)	Configure default static routes needed for all 3 routers to forward packets to the ISP router. (10 pts)
	Criteria #3: Configure RIPv2 parameters needed on all 3 routers for connectivity between internal networks. (40 pts)	Configure RIPv2 parameters needed on all 3 routers for connectivity between internal networks. (40 pts)
	Criteria #4: Test connectivity between all remote networks using ping. (10 pts)	Test connectivity between all remote networks using ping. (10 pts)