

2 **First Neutrino-Induced-Muon Momentum** 3 **Determination by Multiple Coulomb Scattering in a** 4 **LArTPC**

5 **The MicroBooNE Collaboration**

6 **ABSTRACT:** Liquid Argon Time Projection Chambers (LArTPCs) are an important detector tech-
7 nology for the future of neutrino physics. This technology provides precise three-dimensional
8 reconstruction of charged particle tracks that traverse the detector medium. We discuss a technique
9 for measuring a charged particle's momentum by means of multiple coulomb scattering (MCS) in
10 the MicroBooNE LArTPC, which does not require the full particle ionization track to be contained
11 inside of the detector volume as other track momentum reconstruction methods do (range-based
12 momentum reconstruction and calorimetric momentum reconstruction). We provide motivation for
13 why this technique is important, and quantify its performance on fully contained beam-neutrino-
14 induced muon tracks both in simulation and in data. In general we find agreement between data
15 and simulation, with small bias in the momentum reconstruction and with resolutions that vary as
16 a function of track length, decreasing from about 12% for the shortest (one meter long) tracks to
17 nearly 5% for longer (several meter) tracks. Quantification of the performance on exiting tracks, or
18 tracks which are higher energy than those which are fully contained, will be determined in a future
19 publication.

20	Contents	
21	1 Introduction and Motivation	1
22	2 Multiple Coulomb Scattering (MCS)	3
23	3 MCS Implementation Using the Maximum Likelihood Method	3
24	3.1 Track Segmentation and Scattering Angle Computation	4
25	3.2 Maximum Likelihood Theory	5
26	3.3 Maximum Likelihood Implementation	5
27	4 Range-based Energy Validation from Simulation	6
28	5 MCS Performance on Beam Neutrino-Induced Muons in MicroBooNE Data	6
29	5.1 Input Sample	6
30	5.2 Event Selection	6
31	5.3 Highland Validation	8
32	5.4 MCS Momentum Validation	9
33	6 Conclusions	10

34 1 Introduction and Motivation

35 MicroBooNE (Micro Booster Neutrino Experiment) is an experiment based at the Fermi Na-
36 tional Accelerator Laboratory (Fermilab) that uses a large Liquid Argon Time Projection Chamber
37 (LArTPC) to investigate the excess of low energy events observed by the MiniBooNE experiment
38 [1] and to study neutrino-argon cross-sections. MicroBooNE is part of the Short-Baseline Neutrino
39 (SBN) physics program, along with two other LArTPCs: the Short Baseline Near Detector (SBND)
40 and the Imaging Cosmic And Rare Underground Signal (ICARUS) detector. MicroBooNE also
41 provides important research and development in terms of detector technology and event recon-
42 struction techniques for future LArTPC experiments including DUNE (Deep Underground Neu-
43 trino Experiment).

44
45 The MicroBooNE detector[2] consists of a rectangular time projection chamber (TPC) with
46 dimensions 2.6 m width \times 2.3 m height \times 10.4 m length located 470 m away from the Booster
47 Neutrino Beam (BNB) target. LArTPCs allow for precise three-dimensional reconstruction of par-
48 ticle interactions. The x - direction of the TPC corresponds to the drift coordinate, the y - direction
49 is the vertical direction, and the z - direction is the direction along the beam. The mass of active
50 liquid argon in the MicroBooNE TPC is 89 tons, with the total cryostat containing 170 tons of
51 liquid argon.

52

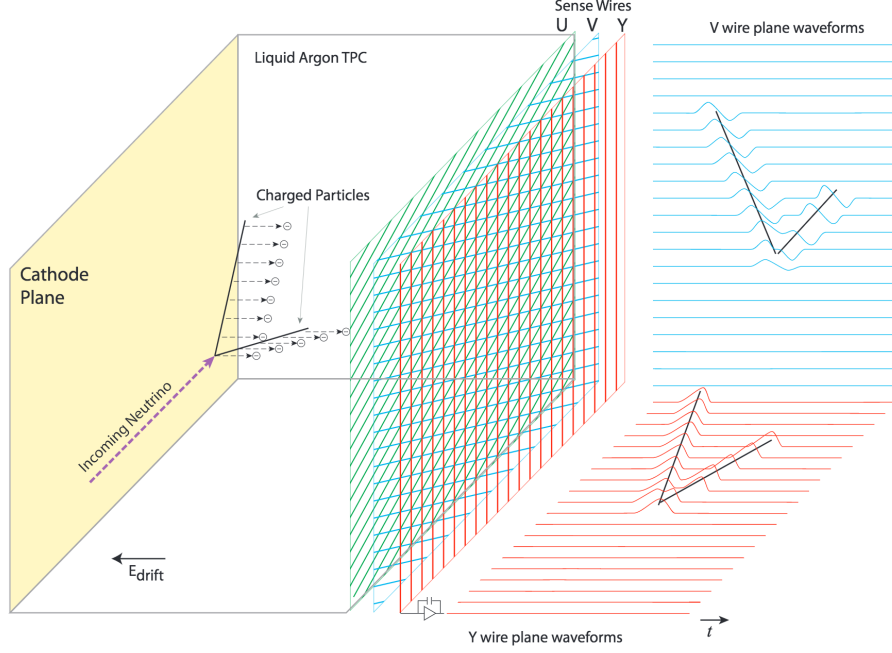


Figure 1. A diagram of the time projection chamber of the MicroBooNE detector [3].

A set of 32 photomultiplier tubes (PMTs) and three wire planes with 3 mm spacing at angles of 0, and ± 60 degrees with respect to the vertical are located in the TPC for event reconstruction (Figure 1). In a neutrino interaction, a neutrino from the beam interacts with an argon nucleus and the charged outgoing secondary particles traverse the medium, losing energy and leaving an ionization trail. The resulting ionization electrons drift to the anode side of the TPC, containing the wire planes. The passage of these electrons near the first two wire planes induces a signal in them and their collection on the third plane also generates a signal. These signals are used to create three distinct two-dimensional views (in terms of wire and time) of the event. Combining these wire signals with timing information from the PMTs allows for full three-dimensional reconstruction of the event.

The Booster Neutrino Beam (BNB) is predominantly composed of muon neutrinos (ν_μ) with a peak neutrino energy of about 0.7 GeV, which can undergo charge-current ($\nu_\mu CC$) interactions in the TPC and produce muons. For muon tracks that are completely contained in the TPC, it is straightforward to calculate their momentum with a measurement of the length of the particle's track, or with calorimetric measurements which come from wire signal measurements. However, around half of muons from BNB neutrino events in MicroBooNE are not fully contained in the TPC, and therefore using length-based calculations for these uncontained tracks is not a possibility. The only way to compute the energy of a non-contained three-dimensional track is by means

72 of multiple coulomb scattering (MCS).
 73

74 In this paper we describe the theory behind multiple coulomb scattering and a maximum like-
 75 lihood based algorithm that is used to determine the momentum of particles in a LArTPC. That this
 76 technique works and is valid for a sample of fully contained muons from BNB ν_μ CC interactions
 77 is demonstrated, with bias and resolutions quantified. Quantification of the performance on exiting
 78 tracks, or tracks which are higher energy than those which are fully contained, will be determined
 79 in a future publication.

80 2 Multiple Coulomb Scattering (MCS)

81 Multiple Coulomb Scattering (MCS) occurs when a charged particle enters a medium and un-
 82 dergoes electromagnetic scattering with the atomic nuclei. This scattering deviates the original
 83 trajectory of the particle within the material (Figure 2). For a given energy, the angular deflection
 84 scatters of a particle in either the x' direction or y' direction (as indicated in the aforementioned
 85 figure) form a gaussian distribution centered at zero with a width, σ_o^{HL} given by the Highland
 86 formula [4]:

$$\sigma_o^{HL} = \frac{13.6 \text{ MeV}}{p\beta c} z \sqrt{\frac{\ell}{X_0}} \left[1 + 0.0038 \ln\left(\frac{\ell}{X_0}\right) \right] \quad (2.1)$$

87 where β is the ratio of the particle's velocity to the speed of light, ℓ is the distance traveled inside
 88 the material, z is the magnitude of the charge of the particle, and X_0 is the radiation length of the
 89 target material (taken to be a constant 14 cm in liquid argon). In practice, a modified version of the
 90 Highland formula is used

$$\sigma_o = \sqrt{(\sigma_o^{HL})^2 + (\sigma_o^{res})^2} = \sqrt{\left(\frac{13.6 \text{ MeV}}{p\beta c} z \sqrt{\frac{\ell}{X_0}} \left[1 + 0.0038 \ln\left(\frac{\ell}{X_0}\right) \right]\right)^2 + (\sigma_o^{res})^2} \quad (2.2)$$

91 where the formula is “modified” from the original Highland formula (Equation 2.1) in that it in-
 92 cludes a detector-inherent angular resolution term, σ_o^{res} . For this analysis, this term is given a fixed
 93 value of 2 mrad which has been determined to be an acceptable value based on simulation studies.
 94

95 With the Highland formula, the momentum of a track-like particle can be determined using
 96 only the 3D reconstructed track it produces in the detector, without any calorimetric or track range
 97 information. The maximum-likelihood based method by which this is done is described in detail in
 98 Section 3, though the original method for using MCS to determine particle momentum in a LArTPC
 99 involved using a Kalman Filter and was originally described by the ICARUS collaboration [5].

100 3 MCS Implementation Using the Maximum Likelihood Method

101 This section describes exactly how the phenomenon of multiple coulomb scattering is leveraged
 102 to determine the momentum of a track-like particle reconstructed in a LArTPC. In general, the
 103 approach is as follows:

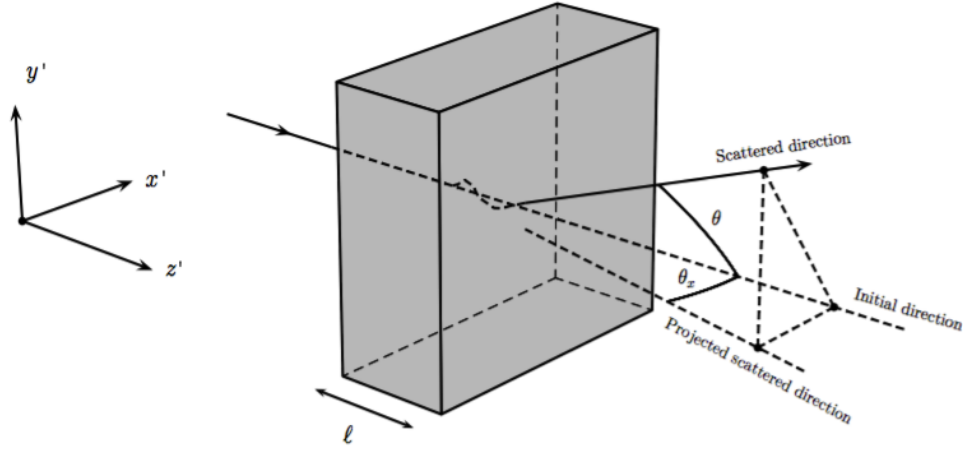


Figure 2. *The particle's trajectory is deflected as it traverses through the material.*

1. The three-dimensional track is divided into segments of configurable length.
2. The scattering angles between consecutive segments are measured.
3. Those angles combined with the modified Highland formula (Equation 2.2) are used to build a likelihood that the particle has a specific momentum, taking into account energy loss in upstream segments of the track.
4. The momentum corresponding to the maximum likelihood is chosen to be the MCS computed momentum.

Each of these steps are discussed in detail in the following subsections.

3.1 Track Segmentation and Scattering Angle Computation

Track segmentation refers to the subdivision of three-dimensional reconstructed trajectory points of a reconstructed track into portions of definite length. In this analysis, the tracks are automatically reconstructed by the “pandoraNuPMA” projection matching algorithm which constructs the three-dimensional trajectory points by combining two-dimensional hits reconstructed from signals on the different wire planes along with timing information from the photomultiplier tubes to reconstruct the third dimension[6]. The segmentation routine begins at the start of the track, and iterates through the trajectory points in order, defining segment start and stop points based on the straight-line distance between them. There is no overlap between segments. Given the subset of the three-dimensional trajectory points that correspond to one segment of the track, a three-dimensional linear fit is applied to the data points, weighing all trajectory points equally in the fit. In this analysis, a segment length of 10 cm is used, which is a tunable parameter that has been optimized based on simulation studies.

127 With the segments defined, the scattering angles between adjacent segments are computed. A
 128 coordinate transformation is performed such that the z' direction is oriented along the direction of
 129 the first of the segment pair. The x' and y' coordinates are then defined such that all of x' , y' , and
 130 z' are mutually orthogonal, as shown in Figure 2. The scattering angles both with respect to the x'
 131 direction and the y' direction are then computed to be used by the MCS algorithm. Note that only
 132 the scattering angle with respect to the x' direction is drawn in Figure 2.

133 3.2 Maximum Likelihood Theory

134 The normal probability distribution for the scattering angle in either the x' or y' direction, $\Delta\theta$ with
 135 an expected gaussian error σ_o and mean of zero is given by:

$$f_X(\Delta\theta) = (2\pi\sigma_o^2)^{-\frac{1}{2}} \exp(-\frac{1}{2}(\frac{\Delta\theta}{\sigma_o})^2) \quad (3.1)$$

136 Here, σ_o is the RMS angular deflection computed by the modified Highland formula (Equa-
 137 tion 2.2), which is a function of both the momentum and the length of that segment. Since energy is
 138 lost between segments along the track, σ_o increases for each angular measurement along the track
 139 so we replace σ_o with $\sigma_{o,j}$, where j is an index representative of the segment.

140
 141 To get the likelihood, one takes the product of $f_X(\Delta\theta_j)$ over all n of the $\Delta\theta_j$ segment-to-
 142 segment scatters along the track. With some manipulation, this product becomes

$$L((\sigma_{o,1})^2, \dots, (\sigma_{o,n})^2; \Delta\theta_1, \dots, \Delta\theta_n) = (2\pi)^{-\frac{n}{2}} \times \prod_{j=1}^n (\sigma_{o,j})^{-1} \times \exp(-\frac{1}{2} \sum_{j=1}^n (\frac{\Delta\theta_j}{\sigma_{o,j}})^2) \quad (3.2)$$

143 In practice, rather than maximizing likelihood it is often more computationally convenient to
 144 instead minimize the negative log likelihood. Inverting the sign and taking the natural logarithm of
 145 the likelihood L gives an expression that is related to a χ^2

$$-l(\mu_o; (\sigma_{o,1})^2, \dots, (\sigma_{o,n})^2; \Delta\theta_1, \dots, \Delta\theta_n) = -\ln(L) = \frac{n}{2} \ln(2\pi) + \sum_{j=1}^n \ln(\sigma_{o,j}) + \frac{1}{2} \sum_{j=1}^n (\frac{\Delta\theta_j}{\sigma_{o,j}})^2 \quad (3.3)$$

146 3.3 Maximum Likelihood Implementation

147 Given a set of angular deflections in the x' and y' directions for each segment as described in
 148 Section 3.1 a raster scan over postulated track momenta in steps of 1 MeV up to 7.5 GeV is com-
 149 puted and the step with the smallest negative log likelihood (Equation 3.3) is chosen as the final
 150 MCS momentum. Note that Equation 3.3 includes a $\sigma_{o,j}$ term which changes for each consecutive
 151 segment because their energies are decreasing. The energy of the j th segment is given by

$$E_j = E_t - k_{cal} * N_{upstream} * l_{seg} \quad (3.4)$$

152 where k_{cal} is the minimally ionizing energy constant taken to be $2.105 \frac{\text{MeV}}{\text{cm}}$ in liquid argon[7],
 153 $N_{upstream}$ is the number of segments upstream of the j th segment, and l_{seg} is the 3D segment
 154 length. This definition of E_j therefore takes into account energy loss along the track. Note that

Equation 3.4 introduces a minimum allowable track energy determined by the length of the track, as E_j must remain positive. This value of segment energy is converted to a momentum, p , with the usual energy-momentum relation, assuming the muon mass, and is then used to predict the RMS angular scatter for that segment (σ_o) by way of Equation 2.2.

4 Range-based Energy Validation from Simulation

In order to quantify the performance of the MCS energy estimation method on fully contained muons in data, an additional handle on energy is needed. Here, range-based energy is used. The stopping power of muons in liquid argon is well described by the particle data group (PDG)[8]. By using a linear interpolation between points in the cited PDG stopping power table, the start-to-end straight-line length of a track can be used to reconstruct the muon's total energy with good accuracy. A simulated sample of fully contained BNB neutrino-induced muons longer than one meter is used to quantify the bias and resolution for the range-based energy estimation technique. The range is defined as the straight-line distance between the true starting point and true stopping point of a muon. The bias and resolution are computed in bins of true total energy of the muons by fitting a gaussian to a distribution of the fractional energy difference ($\frac{E_{Range} - E_{True}}{E_{True}}$) in each bin. The mean of each gaussian indicates the bias for that true energy bin, and the width indicates the resolution. Figure 3 shows the bias and resolution for the range-based energy reconstruction method. It can be seen that the bias is negligible and the resolution for this method of energy reconstruction is on the order of 2-4%. Based on this figure, it is clear that range-based energy (and therefore range-based momentum) is a good handle on the true energy (momentum) of a reconstructed muon track in data, assuming that the track is well reconstructed in terms of length.

5 MCS Performance on Beam Neutrino-Induced Muons in MicroBooNE Data

5.1 Input Sample

The input sample to this portion of the analysis is $\sim 5 \times 10^{19}$ protons-on-target worth of triggered BNB neutrino interactions in MicroBooNE data, which is a small subset of the nominal amount of beam scheduled to be delivered to the detector. These events are run through a fully automated reconstruction chain which produces reconstructed objects including three-dimensional neutrino interaction points (vertices), three-dimensional tracks for each outgoing secondary particle from the interaction, and PMT-reconstructed optical flashes from the interaction scintillation light. The fiducial volume used in this analysis is defined as the full TPC volume reduced by 20 cm from both the cathode plane and the anode wire planes, by 26.5 cm from both the top and bottom walls of the TPC, by 20 cm from the beam-upstream wall of the TPC, and by 36.8 cm from the beam-downstream wall of the TPC.

5.2 Event Selection

The following selection cuts are placed on the aforementioned reconstructed objects to select ν_μ charged-current interactions in which the muon track exiting the interaction vertex is fully contained within the fiducial volume:

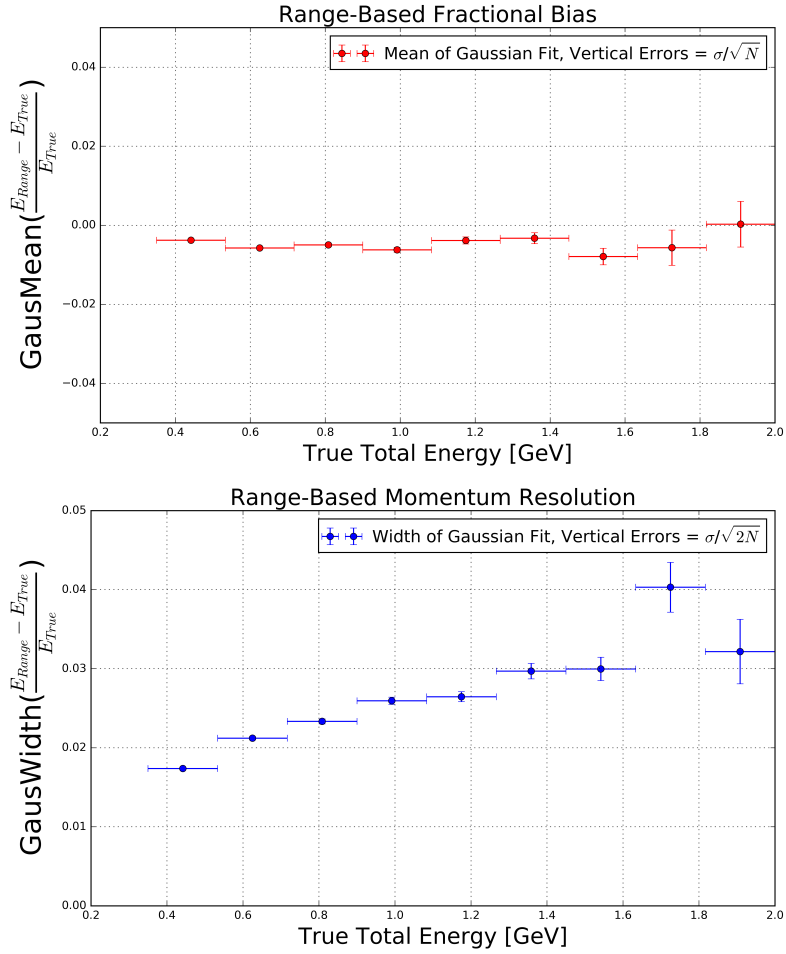


Figure 3. Range-based energy fractional bias (top) and resolution (bottom) from a sample of simulated fully contained BNB neutrino-induced muons using true starting and stopping positions of the track. The bias is less than 1% and the resolution is below $\approx 4\%$.

1. The event must have at least one bright optical flash in coincidence with the expected BNB neutrino arrival time.
2. Two or more reconstructed tracks must originate from the same reconstructed vertex within the fiducial volume.
3. The span in z - of the track must be within 70 cm of the z - position of the optical flash as determined by the pulse height and timing of signals in the 32 PMTs.
4. For events with exactly two tracks originating from the vertex, additional calorimetric-based cuts are applied to mitigate backgrounds from in-time cosmics which produce Michel electrons that are reconstructed as a track.
5. The longest track originating from the vertex is assumed to be a muon, and it must be fully contained within the fiducial volume.

203 6. The longest track must be at least one meter long, in order to have enough sampling points
 204 in the MCS likelihood to obtain a reasonable estimate of its momentum.

205 In this sample of MicroBooNE data, 598 events (tracks) remain after all event selection cuts.
 206 Each of these events (tracks) were scanned by hand with a 2D interactive event display showing the
 207 raw wire signals of the interaction from each wire plane, with the 2D projection of the reconstructed
 208 muon track and vertex overlaid. The scanning was done to ensure the track was well reconstructed
 209 with start point close to the reconstructed vertex and end point close to the end of the visible wire-
 210 signal track in all three planes. Additionally the scanning was to remove obvious mis-identification
 211 (MID) topologies such as cosmic rays inducing Michel electrons at the reconstructed neutrino
 212 vertex which were not successfully removed by the automated event selection cuts. After rejecting
 213 events (tracks) based on hand scanning, 396 tracks remain for analysis.

214 5.3 Highland Validation

215 The Highland formula indicates that histogram of track segment-by-segment angular deviations
 216 in both the x' and y' directions divided by the width predicted from the Highland equation σ_o^{HL}
 217 (Equation 2.1) should be gaussian with a width of unity. In order to calculate the momentum p in
 218 the Highland equation, p for each segment is computed with Equation 3.4 where E_t comes from the
 219 converged MCS computed momentum of the track. For each consecutive pair of segments in this
 220 sample of 396 tracks, the angular scatter in milliradians divided by the Highland expected RMS in
 221 milliradians is an entry in the area-normalized histogram shown in Figure 4. From this figure we
 222 can see that the basis of the MCS technique is validated.

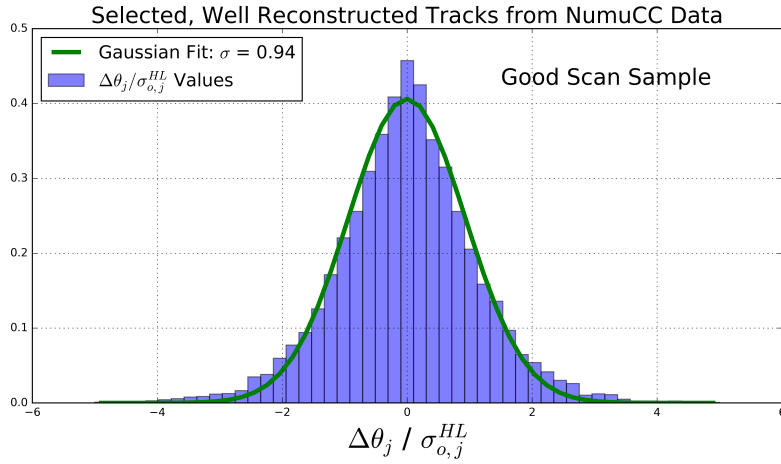


Figure 4. Segment-to-segment measured angular scatters in both the x' and y' directions divided by the Highland formula (Equation 2.1) predicted width σ_o^{HL} for the automatically selected beam neutrino-induced fully contained muon sample in MicroBooNE data after hand scanning to remove poorly reconstructed tracks and obvious mis-identification (MID) topologies. A gaussian distribution with a width of unity indicates that the basis of the MCS technique is validated.

5.4 MCS Momentum Validation

The MCS momentum versus range-based momentum for this sample of 396 tracks can be seen in Figure 5.

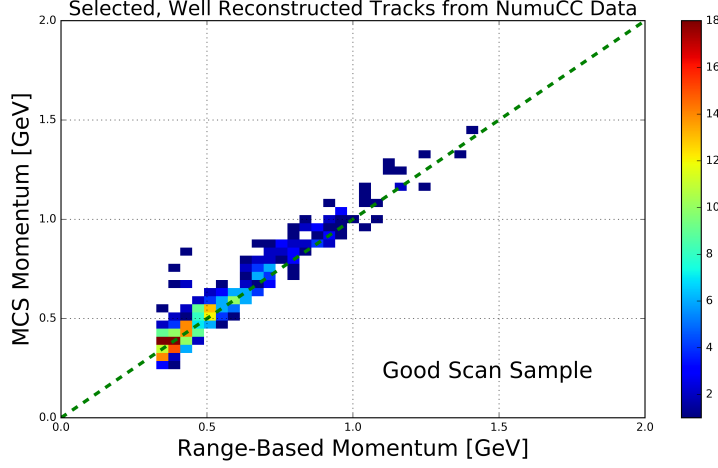


Figure 5. MCS computed momentum versus range momentum for the automatically selected beam neutrino-induced fully contained muon sample in MicroBooNE data after hand scanning to remove poorly reconstructed tracks and obvious mis-identification (MID) topologies.

The MCS momentum fractional bias and resolution as a function of range-based momentum for this sample of 396 tracks is shown in Figure 6. In order to compute this bias and resolution, distributions of fractional inverse momentum difference ($\frac{p_{MCS}^{-1} - p_{Range}^{-1}}{p_{Range}^{-1}}$) in bins of range-based momentum p_{Range} are fit to gaussians and the mean of the fit determines the bias while the width of the fit determines the resolution for that bin. Inverse momentum is used here because the binned distributions are more gaussian (since the Highland formula is a function of inverse momentum), and therefore using the resulting fit parameters is more valid. Note that simply using the mean and RMS of the binned distributions yields similar results. Also shown in this figure are the bias and resolutions for an analogous simulated sample consisting of full BNB simulation with CORSIKA-generated[9] cosmic overlays passed through an identical reconstruction and event selection chain. Rather than hand scanning this sample, truth-based information was used by requiring the longest reconstructed track matched well in terms of true starting and stopping point of the ν_{μ} CC muon. These resolutions on the order of 10% are consistent with the monte-carlo Kalman filter results presented by the ICARUS collaboration in this momentum range[5].

This figure indicates a bias in the MCS momentum resolution on the order of a few percent, with a resolution that decreases from about 11% (9%) for contained reconstructed tracks in data (simulation) with range momentum around 0.45 GeV (which corresponds to a length of about 1.5 meters) to about 5% (6%) for contained reconstructed tracks in data (simulation) with range momentum about 1.15 GeV (which corresponds to a length of about 4.6 meters). In general bias and resolutions agree between data and simulation within uncertainty, with resolution slightly worse in

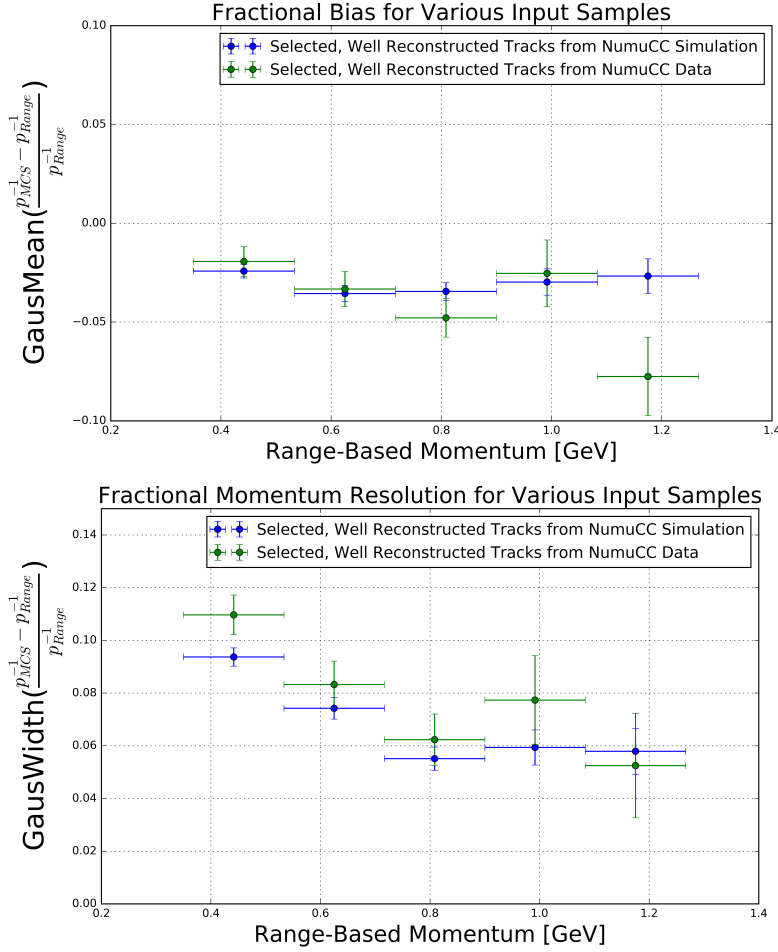


Figure 6. MCS momentum fractional bias (top) and resolution (bottom) for automatically selected contained ν_μ CC-induced muons from full simulated BNB events with cosmic overlay where the track matches with the true muon track (blue), and automatically selected contained ν_μ CC-induced muons from MicroBooNE data where the track is deemed well-reconstructed and likely-muon from hand scanning (green).

data which can be attributed to the inefficiencies involved in hand scanning compared to the truth-based matching cut in simulation.

6 Conclusions

We have described the multiple coulomb scattering technique maximum likelihood method for estimating the momentum of a three dimensional reconstructed track in a LArTPC and have provided motivation for development of such a technique. This technique is a very valuable tool; it is the only way to estimate the momentum of an exiting muon and will be an important ingredient in future oscillation and cross-section measurements by MicroBooNE and within the LArTPC community as a whole. The performance of this method has been quantified both in simulation and in data on beam ν_μ CC-induced muons which are fully contained, with fractional bias less than 5% and with fractional resolution below 12%.

References

- [1] A. A. Aguilar-Arevalo *et al.* [MiniBooNE Collaboration], Improved Search for $\bar{\nu}_\mu \rightarrow \bar{\nu}_e$ Oscillations in the MiniBooNE Experiment, Phys. Rev. Lett. **110**, 161801 (2013).
doi:10.1103/PhysRevLett.110.161801 [arXiv:1207.4809 [hep-ex], arXiv:1303.2588 [hep-ex]].
- [2] R. Acciarri *et al.* [MicroBooNE Collaboration], Design and Construction of the MicroBooNE Detector, http://microboone-docdb.fnal.gov:8080/cgi-bin/RetrieveFile?docid=5752&filename=MicroBooNE_DetectorPaper_Version4.0.pdf&version=3
- [3] S. Lockwitz, The MicroBooNE LArTPC,
<http://www-microboone.fnal.gov/talks/dpfMicroBooNELArTPC.pdf>.
- [4] V. L. Highland, Some Practical Remarks on Multiple Scattering, Nucl. Instrum. Methods **129** (1975) 104-120.
- [5] A. Ankowski *et al.* [ICARUS Collaboration], “Measurement of through-going particle momentum by means of multiple scattering with the ICARUS T600 TPC,” Eur. Phys. J. C **48**, 667 (2006)
doi:10.1140/epjc/s10052-006-0051-3 [hep-ex/0606006].
- [6] J. S. Marshall and M. A. Thomson, Eur. Phys. J. C **75**, no. 9, 439 (2015)
doi:10.1140/epjc/s10052-015-3659-3 [arXiv:1506.05348 [physics.data-an]].
- [7] D. E. Groom, N. V. Mokhov and S. Striganov, “Muon Stopping Power and Range Tables: 10 MeV - 100 TeV” Table 5, <http://pdg.lbl.gov/2012/AtomicNuclearProperties/adndt.pdf>
- [8] Table 289: Muons in Liquid argon (Ar) http://pdg.lbl.gov/2012/AtomicNuclearProperties/MUON_ELOSS_TABLES/muonloss_289.pdf
- [9] D. Heck, J. Knapp, J. N. Capdevielle, G. Schatz, T. Throw, *CORSIKA: A Monte Carlo Code to Simulate Extensive Air Showers*, Forschungszentrum Karlsruhe Report FZKA 6019 (1998)