

1LE7 SIMOTICS Motors - Redefining the world of energy efficiency

Presenting a wide range of energy efficient
low voltage motors

IE2

IE3

www.siemens.co.in/lv-motors

Catalog

Edition
January
2021

SIMOTICS 1LE7 motors

Overview

SIMOTICS – the most comprehensive range of motors

The history of today's most comprehensive range of motors worldwide started about 150 years ago in 1866 when Werner von Siemens developed the dynamo-electric principle. This principle allowed powerful electric motors to be designed and built, thereby creating the basis for their widespread use in industry today. Since then, motor development has been one of the core business of the company, and with greater than a century worth of experience, Siemens sets the pace when it comes to innovative motor technology. Today, millions of Siemens motors are efficiently powering machines and equipment in industrial facilities around the world. In all sectors, applications and power classes. Siemens energy-efficient low-voltage motors with high dynamic performance have proven themselves in use, and are attractive as a result of their quality, efficiency and compactness. The new SIMOTICS 1LE7 range of motors are offered in line with the range of motors offered worldwide from the house of Siemens.

SIMOTICS stands for:

- More than 150 years of motor production worldwide and 50 years of motor production in India
- Optimum solutions in all sectors, regions and power classes
- Innovative motor technology with the highest quality and reliability
- Highest dynamic performance, precision and efficiency, with an optimum degree of compactness
- Integration of the motors in the drive train to create an overall system
- The global network of skill sets and round the clock service worldwide

SimoQ Highlights:

Standard 1LE7 motor selection & documentation download
Datasheet, GAD, Performance Curves

GPS enabled location tracker
Customer connect to Siemens sales engineer by location wise sales mapping

Z Code Dictionary
Two-way mapping for 1LE7 Z options and its description to know non standard options better

Home

- SimoAssist** Configure your motor and download documentation
- Enquiry Cart** Add and view your enquiry
- Sales Tracker** Locate your nearest Sales office
- Enquiry Tracker** Trace your Enquiry
- Z Decoder** Know Non-Standard options better
- News** Stay connected with our latest updates

Project list creation by enquiry cart
Project enquiry forwarded to nearest sales engineer

Your Enquiry History
Track your ongoing enquiry and re-enquire from your past App enquiry cart

News & Updates
Customer awareness space and Marketing forum (B2B unique)

IE efficiency classes

The efficiency classes are grouped according to the following nomenclature (IE = International Efficiency):

- IE2 (High Efficiency)
- IE3 (Premium Efficiency)
- IE4 (Super Premium Efficiency)

Minimum efficiencies according to IS 12615 :2018 are

Rated power P _{rated, 50 Hz} kW	Efficiency η in %															
	2 Pole				4 Pole				6 Pole				8 Pole			
	Frame size	IE2 – High Efficiency	IE3 – Premium Efficiency	IE4 – Super Premium Efficiency	Frame size	IE2 – High Efficiency	IE3 – Premium Efficiency	IE4 – Super Premium Efficiency	Frame size	IE2 – High Efficiency	IE3 – Premium Efficiency	IE4 – Super Premium Efficiency	Frame size	IE2 – High Efficiency	IE3 – Premium Efficiency	IE4 – Super Premium Efficiency
0.12	56	53.6	60.8	66.5	63	59.1	64.8	69.8	63	50.6	57.7	64.9	71	39.8	50.7	62.3
0.18	63	60.4	65.9	70.8	63	64.7	69.9	74.7	71	56.6	63.9	70.1	80	45.9	58.7	67.2
0.25	63	64.8	69.7	74.3	71	68.5	73.5	77.9	71	61.6	68.6	74.1	80	50.6	64.1	70.8
0.37	71	69.5	73.8	78.1	71	72.7	77.3	81.1	80	67.6	73.5	78.0	90S	56.1	69.3	74.3
0.55	71	74.1	77.8	81.5	80	77.1	80.8	83.9	80	73.1	77.2	80.9	90L	61.7	73.0	77.0
0.75	80	77.4	80.7	83.5	80	79.6	82.5	85.7	90S	75.9	78.9	82.7	100L	66.2	75.0	78.4
1.1	80	79.6	82.7	85.2	90S	81.4	84.1	87.2	90L	78.1	81.0	84.5	100L	70.8	77.7	80.8
1.5	90S	81.3	84.2	86.5	90L	82.8	85.3	88.2	100L	79.8	82.5	85.9	112M	74.1	79.7	82.6
2.2	90L	83.2	85.9	88.0	100L	84.3	86.7	89.5	112M	81.8	84.3	87.4	132S	77.6	81.9	84.5
3.7	100L	85.5	87.8	89.7	112M	86.3	88.4	90.9	132S	84.3	86.5	89.3	160M	81.4	84.5	86.8
5.5	132S	87.0	89.2	90.9	132S	87.7	89.6	91.9	132M	86.0	88.0	90.5	160M	83.8	86.2	88.3
7.5	132S	88.1	90.1	91.7	132M	88.7	90.4	92.6	160M	87.2	89.1	91.3	160L	85.3	87.3	89.3
11	160M	89.4	91.2	92.6	160M	89.8	91.4	93.3	160L	88.7	90.3	92.3	180L	86.9	88.6	90.4
15	160M	90.3	91.9	93.3	160L	90.6	92.1	93.9	180L	89.7	91.2	92.9	200L	88.0	89.6	91.2
18.5	160L	90.9	92.4	93.7	180M	91.2	92.6	94.2	200L	90.4	91.7	93.4	225S	88.6	90.1	91.7
22	180M	91.3	92.7	94.0	180L	91.6	93.0	94.5	200L	90.9	92.2	93.7	225M	89.1	90.6	92.1
30	200L	92.0	93.3	94.5	200L	92.3	93.6	94.9	225M	91.7	92.9	94.2	250M	89.8	91.3	92.7
37	200L	92.5	93.7	94.8	225S	92.7	93.9	95.2	250M	92.2	93.3	94.5	280S	90.3	91.8	93.1
45	225M	92.9	94.0	95.0	225M	93.1	94.2	95.4	280S	92.7	93.7	94.8	280M	90.7	92.2	93.4
55	250M	93.2	94.3	95.3	250M	93.5	94.6	95.7	280M	93.1	94.1	95.1	315S	91.0	92.5	93.7
75	280S	93.8	94.7	95.6	280S	94.0	95.0	96.0	315S	93.7	94.6	95.4	315M	91.6	93.1	94.2
90	280M	94.1	95.0	95.8	280M	94.2	95.2	96.1	315M	94.0	94.9	95.6	315L [#]	91.9	93.4	94.4
110	315S	94.3	95.2	96.0	315S	94.5	95.4	96.3	315M [#]	94.3	95.1	95.8	315L [#]	92.3	93.7	94.7
132	315M [#]	94.6	95.4	96.2	315M [#]	94.7	95.6	96.4	315L [#]	94.6	95.4	96.0	315L [#]	92.6	94.0	94.9
160	315L [#]	94.8	95.6	96.3	315L [#]	94.9	95.8	96.6	As per manufacturer catalogue				As per manufacturer catalogue			
200 ... 1000	As per manufacturer catalogue	95.0	95.8	96.5	As per manufacturer catalogue	95.1	96.0	96.7	As per manufacturer catalogue	95.0	95.8	96.3	As per manufacturer catalogue	93.5	94.6	95.4

Output to frame size relation is maintained in accordance with IS 1231 for all motors except those marked as #, wherein the frame size indicated is 'preferred size'.

Note:

All efficiency classes are stated with reference to 50 Hz data - (unless specified otherwise).

SIMOTICS 1LE7 motors

Overview

To protect the motor against corrosion and external influences, high-quality paint systems are available in various colors.

Additional identification code -Z with order code							
Standard version	S01 (DFT 60µ)	S07+Y57 (DFT 90µ)	S07+Y57 (DFT 120µ) Y57 = 120µ	S07+Y57 (DFT 180µ) Y57 = 180µ	* S03+ S06+ Y57 (DFT 180µ) Y57 = 180µ	* S03+ S06+ Y57 (DFT 240µ) Y57 = 240µ	* S04+ S06+ Y57 (DFT 295µ) Y57 = 295µ
Paint finish, suitability of paint finish for climate group in accordance with IEC 60721-2-1							
Standard paint finish	Unpainted, motor primed	Epoxy based Paint - Standard paint thickness	Epoxy based Paint - Special paint thickness DFT 120µ	Epoxy based Paint - Special paint thickness DFT 180µ	Special finish for use onshore sea air resistant	Special finish for use onshore sea air resistant	Special paint thickness for offshore use
Use							
The motors can be supplied with just a (red oxide) primer coat on request.	Moderate (extended) for indoor and outdoor installation under a roof not directly exposed to weather conditions	Moderate (extended) for indoor and outdoor installation under a roof not directly exposed to weather conditions	Worldwide (global) for outdoor installation in direct sunlight and/or exposed to weather conditions	Sea-air resistant paint finish with final coat polyurethane paint (DFT 180µ)	Sea-air resistant paint finish with final coat polyurethane paint (DFT 240µ)	Paint finish for off-shore use with final coat polyurethane paint (DFT 295µ)	
			Worldwide (global) for outdoor installation in direct sunlight and/or exposed to weather conditions.	Recommended for indoor or outdoor installation directly exposed to weather conditions, industrial climate with moderate SO2 exposure, VIK requirements, inshore maritime climate, but not offshore maritime climate e.g. for crane drives and in the paper industry	Recommended for outdoor installations exposed to direct weather conditions, industrial climate with moderate SO2 exposure, and offshore maritime climate, e.g. for crane drives.		
	Corrosive category C2 (low) according to ISO 12944 -2	Corrosive category C2 (medium) according to ISO 12944 -2	Corrosive category C3 (medium) according to ISO 12944 -2	Corrosive category C3 (medium) according to ISO 12944 -2	Corrosive category C4 (medium) according to ISO 12944 -2	Corrosive category C5-I and C5-M (medium) according to ISO 12944 -2	

Notes:

1. Paint thickness needs to be specified by means of plain text irrespective of whether it is standard or special.
2. S06 - Final Coat Polyurethane is mandatory with S03 or S04. S06 is not possible to be ordered separately.
3. H07 - Non-rusting external hardware is mandatory with S03 or S04. H07 can be separately order even without S03 or S04. The separate price for H07 is available against the option.

Paint finish in other standard RAL colors –**Order code Y53****(RAL number is required in plain text)**

RAL No.	Color name	RAL No.	Color name
3007	Black red	7000	Squirrel gray
5002	Ultramarine blue	7001	Silver gray
5007	Brilliant blue	7004	Signal gray
5009	Azure blue	7011	Iron gray
5010	Gentian blue	7016	Anthracite gray
5015	Sky blue	7022	Umbra gray
5017	Traffic blue	7031	Blue gray
5018	Turquoise blue	7032	Pebble gray
5019	Capri blue	7033	Cement gray
6011	Reseda green	7035	Light gray
6021	Pale green	9005	Jet black

The following weakly covering paints must be applied at least twice owing to their poor opacity. The standard paint finish for these colors is not possible and must be ordered with **S07, S03, or S04**.

RAL No.	Color name
1002	Sand yellow
1013	Oyster white
1015	Light ivory
1019	Gray beige
2003	Pastel orange
2004	Pure orange
3000	Flame red
5012	Light blue
6019	Pastel green
9001	Cream white
9002	Gray white

IS5 Paint Shade for Y56

Shade	Color name
631	Light Grey
632	Dark Admiralty Grey
697	Light Admiralty Grey
692	Smoke Grey
275	Opaline Green
536	Fire Red
538	Post Office Red
166	French Blue
174	Oriental Blue
217	Sea Green
221	Brilliant Green
281	Apple Green
635	Lead
693	Aircraft Grey
694	Dove Grey

Paint finish in special RAL colors –**Order code Y56****(RAL number is required in plain text)**

RAL No.	Color name	RAL No.	Color name
3004	Purple red	6032	Signal green
3011	Brown red	6034	Pastel turquoise
3015	Light pink	7005	Mouse gray
3020	Traffic red	7009	Green gray
4005	Blue lilac	7012	Basalt gray
5000	Violet blue	7015	Slate gray
5001	Green blue	7023	Concrete gray
5003	Sapphire blue	7036	Platinum gray
5005	Signal blue	7037	Dusty gray
5011	Steel blue	7038	Agate gray
5013	Cobalt blue	7039	Quartz gray
5014	Pigeon blue	7040	Window gray
5020	Ocean blue	7042	Traffic gray A
5021	Water blue	7044	Silk gray
5022	Night blue	7045	Telegray 1
5023	Distant blue	7046	Telegray 2
6000	Patina green	7047	Telegray 4
6001	Emerald green	8012	Red brown
6002	Leaf green	8025	Pale brown
6005	Moss green	8028	Terra brown
6009	Fir green	9003	Signal white
6010	Grass green	9004	Signal black
6016	Turquoise green	9006	White aluminum
6017	May green	9007	Gray aluminum
6018	Yellow green	9010	Pure white
6024	Traffic green	9011	Graphite black
6026	Opal green	9016	Traffic white
6029	Mint green	9017	Traffic black

The following weakly covering paints must be applied at least twice owing to their poor opacity. The standard paint finish for these colors is not possible and must be ordered with **S07, S03, or S04**.

RAL No.	Color name
1003	Signal yellow
1004	Golden yellow
1006	Maize yellow
1007	Daffodil yellow
1012	Lemon yellow
1014	Ivory
1018	Zinc yellow
1021	Rape yellow
1023	Traffic yellow
1028	Melon yellow
1032	Broom yellow
1033	Dahlia yellow
2008	Bright red orange
2009	Traffic orange
2010	Signal orange
3002	Carmine red
5024	Pastel blue
6027	Light green

SIMOTICS 1LE7 motors

Overview

Packing Weight and Dimensions

Applicable standards and specifications

The 1LE7 motors comply with the various Indian Standards and also some IEC 60034 series of international product standards for rotating electrical machines and, in particular, those parts that are listed in the table below.

Title	IS standards	IEC
General specifications for rotating electrical machines	IS 15999 (Part 1)	IEC 60034-1
Specification of the losses and efficiency of rotating electrical machines	IS 15999 (Part 2 SEC 1)	IEC 60034-2-1
General-purpose three-phase induction motors having standard dimensions and powers	IS 1231 IS 2223	IEC 60072 Mounting dimensions and power series only (no assignment of frame size to power)
Terminal designations and direction of rotation for electrical machines	IS/IEC 60034 (Part 8)	IEC 60034-8

Title	IS standards	IEC
Designation for types of construction, mounting, and terminal box position (IM code)	IS 1231 IS 2223 Construction IS 2253	IEC 60034-7
Built-in thermal protection	–	IEC 60034-11
Noise limits of rotating electrical machines	IS 12065	IEC 60034-9
IEC standard voltages	IS 12360	IEC 60038
Methods of cooling of rotating electrical machines (IC code)	IS 6362	IEC 60034-6
Vibration severity of rotating electrical machines	IS 12075	IEC 60034-14
Degrees of protection for rotating electrical machines (IP code)	IS/IEC 60034-5	IEC 60034-5
International efficiency classes for rotating electrical machines (IE code)	IS 12615	IEC 60034-30-1

Tolerances for electrical data

According to IEC 60034-1, the following tolerances are permitted:

Efficiency η at

$P_{\text{rated}} \leq 150 \text{ kW}$: $-0.15 \times (1 - \eta)$

$P_{\text{rated}} > 150 \text{ kW}$: $-0.1 \times (1 - \eta)$

Where η is a decimal number.

$$\text{Power factor: } \frac{1 - \cos\phi}{6}$$

- Minimum absolute value: 0.02
- Maximum absolute value: 0.07

Slip $\pm 20\%$ (for motors $< 1 \text{ kW}$ $\pm 30\%$ is admissible)

Locked-rotor current $+20\%$

Locked-rotor torque -15% to $+25\%$

Breakdown torque -10%

Moment of inertia (or GD^2) $\pm 10\%$

Voltage and frequency variation

As per IS 12615, motors shall be capable of delivering rated output with

- terminal voltage differing from its rated value by not more than $\pm 10\%$
- frequency differing from its rated value by not more than $\pm 5\%$
- combined variation - The sum of absolute percent variation of (a) and (b) not exceeding 10%.

In the case of continuous operation at the extreme voltage limits specified at (a) and (b), the temperature rise limits of the winding specified in IS 15999 (Part 1)/IEC 60034-1 shall not exceed by more than 20 K. In such cases, motor may be designed with higher class of insulation. Motors operated under the extreme conditions of voltage and/or frequency specified in (a) and (b), the performance values given in the selection tables may not necessarily comply with IS 12615

For some non-standard voltages at 50 or 60 Hz, order codes are specified. They are ordered by specifying the code digit **9** for voltage in the 12th position of the MLFB as well as the code digit **0** in the 13th position of the MLFB and the corresponding order code.

M1Y Non-standard rated voltage between 220 V and 690 V (voltages outside this range are available on request).

Order codes for other rated voltages are listed under

"Order suffixes" in the "Selection and ordering data" as well as "Special versions" under "Voltages".

Supplementary data

Supplementary data (maximum of 20 characters) can be indicated on the rating plate or additional rating plate and on the packaging label, order code **Y84**.

An additional rating plate for customer specifications is also possible, additional text: 2 lines of 20 characters each, order code **Y82**.

An additional rating plate with deviating rating plate data can also be ordered (only for ratings such as voltage, power, speed), order code **Y80**.

Examples of rating plates

Standard rating plate (metal) for IEC motors and motors conforming to IS 12615

SIEMENS		
Made in India		
3Ø Motor 1LE75033AB434AA4-Z KW 191165 65206800		
IEC60034-1 315L IMB3 IP55		
1160kg	Th.Cl. 155 (F)	-20°C <= TAMB <= 50°C
	Bearing	UNIREX - N3
<input type="radio"/> DE NE	6319-C3 6319 - C3 INS	40g Interval 6000h 40g
V 400Δ 690Y 440Δ	Hz 50 50 60	A 277 160 251 kW 160 160 160 PF 0.87 0.87 0.87 NOM.EFF 95.9 95.9 96.2 rpm 1489 1489 1790 IE-CL IE3 IE3 IE3

SIEMENS		
Made in India		
3Ø Motor 1LE75033AA235AA4-Z KW 190865 65180137		
IEC60034-1 315M IMB3 IP55		
906kg	Th.Cl. 155 (F)	-20°C <= TAMB <= 50°C
	Bearing	UNIREX - N3
<input type="radio"/> DE NE	6316-C3 6316-C3	30g Interval 3000h 30g
V % 415Δ± 10	Hz % 50±5	A 211 kW 132 PF 0.91 NOM.EFF 95.6 rpm 2982 IE-CL IE3 IS 12615 CMIL 7800027912

Efficiency and power factor

The nominal efficiency (η) and the power factor ($\cos\phi$) for each rated power are listed in the selection tables in the individual sections of this catalog.

Rated speed and direction of rotation

The rated speeds are applicable for the rated data. The synchronous speed changes proportionally with the line frequency. The motors are suitable for clockwise and counterclockwise rotation.

When U1, V1, W1 are connected to L1, L2, L3 the motor rotates clockwise when viewing the drive shaft extension as a standard practice. Counterclockwise rotation is achieved by swapping any of the two phases.

SIMOTICS 1LE7 motors

Overview

Rated torque

The rated torque in Nm delivered at the motor shaft is

$$T = \frac{9550 \times P}{n}$$

P Rated power in kW

n Speed in rpm

Torque in kgf.m can be calculated by dividing the torque in Nm by 9.80665.

Note:

If the voltage deviates from its rated value within the admissible limits, the locked-rotor torque, the pull-up torque and the breakdown torque vary approximately in square proportion to the voltage, but the locked-rotor current varies approximately linearly.

In the case of squirrel-cage motors, the locked-rotor torque and breakdown torque are listed in the selection tables as multiples of the rated torque.

Preferred practice is to start squirrel-cage motors directly on line. The torque class indicates that with direct-on-line starting, even if there is an undervoltage of -10 %, it is possible to start up the motor against a constant load torque of

- 160 % for KL 16
- 130 % for KL 13
- 100 % for KL 10

of the rated torque.

DURIGNIT IR 2000 insulation system

The DURIGNIT IR 2000 insulation system consists of high quality enamel wires and insulating sheet materials in conjunction with temperature resistant resin impregnation.

This ensures that these motors will have a high mechanical and electrical strength, high service value, and a long lifetime. The insulation system protects the winding to a large degree against aggressive gases, vapors and dust. It can withstand the usual vibration stressing.

Please enquire about extreme applications.

Insulation systems for converter operation

Frame size 71 to 225 - The SIMOTICS motors can be operated in their standard version up to maximum converter input voltage of 480 V

Frame size 250 to 315 - The SIMOTICS motors can be operated in their standard version up to maximum converter input voltage of 500 V

Frame size 180 to 225 - For higher converter input voltages, $480V < U_N \leq 690V$, special insulation system (PREMIUM) is required, please enquire.

Frame size 250 to 315 - For higher converter input voltages, $500V < U_N \leq 690V$, special insulation system (PREMIUM) is required.

Bearing insulation/shaft grounding brushes

To avoid damage to bearings due to bearing currents, we recommend bearing insulation at the non-drive end (NDE) for frame size 225 and larger (order code L53). It is mandatory to provide insulated bearing on non-driving end (NDE) for frame size 280 and above.

In most cases, NDE bearing insulation provides sufficient protection against damage to bearings due to bearing currents.

In rare cases, depending on the application and system, it may be necessary to take further measures on the converter or motor. On the motor side, shaft grounding brushes (order code L52 for frame size 280 and 315 can be provided. Please enquire for option L52

The EMC guidelines must always be complied with when the drive system is installed.

Thermal utilization of the motor

When motors are operated on a converter, additional losses occur due to the harmonics in the motor currents, which, depending on the permissible winding temperature, can make it necessary to reduce the torque (de-rate the motor). For operation on SINAMICS converters, the permissible torque values can be obtained from DTK

For operation on SINAMICS converters with the power ratings specified in the catalog, the motors are used according to temperature class 155 (F), i.e. in this case neither a service factor > 1 nor an increased coolant temperature is possible (order codes N01, N02 and N03 cannot be ordered).

Restarting against residual field and opposite phase

All motors can be restarted against 100 % residual field after a line voltage failure.

Winding and insulation version with regard to temperature class

At rated power with line fed operation, most of the motors have utilization in accordance with temperature class B (130°C).

Temperature class 155 (F), utilized according to 155 (F), with service factor (SF)

According to the selection table, at rated power and rated voltage, all 1LE7 motors in line operation have a service factor of 1.15 with few exceptions. Please enquire.

Order code N01

Temperature class 155 (F), utilized according to 155 (F), for higher power

When utilized according to temperature class 155 (F), the rated power specified in the selection and ordering data can be increased by 15% with few exceptions. Please enquire.

Order code N02

Temperature class 155 (F), utilized acc. to 155 (F), with increased coolant temperature

With power as defined in the catalog and line operation, coolant temperature is permitted to rise to 55°C with few exceptions. Please enquire.

Order code **N03**

The service factor (SF) is not indicated on the rating plate for order codes **N02** and **N03**.

For converter operation at the rated power specified in the catalog, the motors are utilized according to temperature class 155 (F). Order codes N01, N02, and N03 are not possible.

Temperature class 155 (F), utilized acc. to 130 (B), coolant temperature 55°C, (Applicable for 1LE76 and 1LE77)

1LE7 motors with one step lower output in versions 1LE76 or 1LE77 can be ordered according to temperature class 155 (F) for utilization according to temperature class 130 (B) and a maximum coolant temperature of 55°C.

Order code **N07**Temperature class 155 (F), utilized acc. to 130 (B), coolant temperature 60°C, derating approx. 10 %

Motor series 1LE7 can be ordered according to temperature class 155 (F) for utilization according to temperature class 130 (B) and a maximum coolant temperature of 60°C with derating of 10 %. Please enquire before ordering as this calls for certain changes in specifications of components / material to be used in motors.

Order code **Y50** in conjunction with **M1Y**Temperature class 180 (H)

Motor series 1LE7, temperature class 180 (H), utilized according to 155 (F) is permitted.

Order code **N10**Temperature class 180 (H) at rated power and max. coolant temperature 60°C

Motor series 1LE7 can be ordered according to temperature class 180 (H) for utilization according to temperature class 155 (F) and a maximum coolant temperature of 60°C. Please enquire.

Order code **Y75** in conjunction with **M1Y**

The grease lifetime specified is valid for a coolant temperature 50°C. If the coolant temperature is increased by 10 K, the grease lifetime and re-greasing interval are halved. (Refer page 9 for regressing interval details)

Temperature class 155 (F), utilized acc. to 130 (B), with higher coolant temperature and/or installation altitude

The motors can be ordered according to temperature class 155 (F) for utilization according to temperature class 130 (B) with other customized requirements if they are specified in plain text in the order.

Order code **Y50** in conjunction with **M1Y**Temperature class 180 (H), utilized according to 155 (F)

The motors can be ordered according to temperature class 180 (H) for utilization according to temperature class 155 (F) with other customized requirements if they are specified in plain text in the order.

Order code **Y75** in conjunction with **M1Y**

The specified rated power is applicable for continuous duty in accordance with IS 12615/ IEC 60034-1 at the frequency of 50 Hz, a coolant temperature (CT) or ambient temperature of 50°C and an installation altitude (IA) up to 1000 m above sea level. 1LE7 motors for ambient temperatures exceeding 50°C are equipped with various types of seal.

For higher coolant temperatures and/or installation altitudes greater than 1000 m above sea level, the specified motor power must be reduced using the factor k_{HT} .

Depending on the frame size of the motor or the number of poles, customized windings may be added to the motors for the different operating conditions.

This results in an admissible motor power of:

$$P_{adm} = P_{rated} \cdot k_{HT}$$

If the admissible motor power is no longer adequate for the drive, it should be checked whether the motor with the next higher rated power fulfills the requirements.

Abbreviation	Description	Unit
P_{adm}	Admissible motor power	kW
P_{rated}	Rated power	kW
k_{HT}	Factor for abnormal coolant temperature and/or installation altitude	

The motors are designed for temperature class 155 (F) and utilized in temperature class 130 (B). Under non-standard operating conditions, if they are to be used in this class, the admissible power rating must be determined from the table below.

Note for cases 60° Ambient, please enquire.

 K_{HT} Values

Installation altitude above sea level	Coolant temperature						
	< 30°C	30 ... 40°C	45°C	50°C	55°C	60°C	
1000	1.07	1.00	1.00	1.00	0.95	0.90	
1500	1.04	0.97	0.97	0.97	0.92	0.87	
2000	1.00	0.94	0.94	0.94	0.89	0.85	
2500	0.96	0.90	0.90	0.90	0.86	0.81	
3000	0.92	0.86	0.86	0.86	0.82	0.77	
3500	0.88	0.82	0.82	0.82	0.78	0.74	
4000	0.82	0.77	0.77	0.77	0.73	0.69	

Coolant temperature and installation altitude are rounded to 5°C and 500m respectively.

For details of derating for utilization in temperature class 155 (F), see "DURIGNIT IR 2000 insulation system".

SIMOTICS 1LE7 motors

Overview

Ambient temperature:

All motors can be used in the standard version at ambient temperatures between –20 and +50°C. Exposure to direct sunlight can result in uncontrollable rise in motor temperature. Appropriate measures to prevent direct exposure to sunlight and rain shall be made by user.

Motors can be utilized to temperature class 155 (F).

At 50°C with service factor 1.15, i.e. the motor may be continuously overloaded with 15% of the rated power; however may exhibit a reduced lifetime in such a case. As a standard the motors are designed to conform to the efficiency requirement of the relevant efficiency class at the standard rated output.

Note: Should the motors be required to be continuously operated at SF load, the Indian Standard requires that the motors meet the efficiency value corresponding to the SF power. In such case special designs are required to be offered and an enquiry should be made.

For other higher ambient temperatures (Up to 60°C) special measures are necessary, please enquire.

When brakes are to be mounted on motors intended for operation at temperatures below freezing, please enquire.

Anti-condensation heating

Supply voltage 230 V (1AC)

Order code **Q02**

Supply voltage 115 V (1AC)

Order code **Q03**

Supply voltage 240 V (1AC)

Order code **Q07**

Supply voltage 120 V (1AC)

Order code **Q08**

For motors with windings at risk of condensation due to the climatic conditions, e.g. inactive motors in humid atmospheres or motors that are subjected to widely fluctuating temperatures, anti-condensation heaters must be used.

Anti-condensation heaters can be offered from frame size 90 onwards,

An additional cable entry is provided for the connecting cable in the terminal box.

Frame size	Cable entry
90...180	1 x M16 x 1.5
200	1 x M20 x 1.5
225... 315	2 x M20 x 1.5

Anti-condensation heating must not be switched on during operation.

Frame size	Heating power of the anti-condensation heating				
	Supply voltage at	230 V	115 V	240 V	120 V
Order code	Order code	Order code	Order code	Order code	Order code
Q02	Q03	Q07	Q08		
W	W	W	W	W	W
1LE7 Motors					
90 ... 112	25	25	27	27	
132 ... 200	55	55	60	60	
225 ... 250	85	85	93	93	
280 ... 315	107	107	117	117	

Instead of an anti-condensation heater, for frame size up to 225 another possibility is to connect a voltage that is approximately 4 to 10 % of the rated motor voltage to stator terminals U1 and V1; 20 to 30 % of rated motor current is sufficient to heat the motor.

Fans/separately driven fans

All 1LE7 motors except those offered with options F70 or F90 are provided with shaft mounted fans which cool regardless of direction of rotation. These motors have a cooling method IC411 in accordance with IEC 60034-6. The air flow is from the NDE to DE. Material details for shaft mounted fans and fan-cowls please refer the table below

Motor series	Frame size	Fan material	Fan cover material
1LE7	71 ... 315	Plastic	Metal

Notes:

- 1LE7... -Z, Z=F70 - This option stands for separately cooled motors - method of cooling IC416. These are provided in frames 160 - 315. Please see relevant section below for further details.
- 1LE7... -Z, Z=F90 - This option stands for motors without fan and fan-cowl, however cooled by the cooling air blown over the motor body by the fan these motors drive. This enclosure is also called TEAO - Totally Enclosed Air Over. The method of cooling is designated as IC418. These are provided in frames 71 - 315.

Caution: Motors with F90 should not be coupled to any other equipment except an axial flow fan. Doing so will render the motors un-ventilated and thereby excessive overheating and significantly shortened life times.

1LE7 IE2 Flow (m³/min)

Frame size	Pole	2	4	6	8
71		1.49	0.75	0.49	
80		1.82	0.90	0.60	
90		3.30	1.64	1.11	
100		3.80	2.10	1.50	
112			2.90	1.90	
132		6.30	6.30	4.60	
160		10.9	6.7	5	
180		12.4	14	5.2	
200		19.3	14.6	8	
225		22	26.7	15	
250		28	30	19	
280		47	33	24	
315		67	49	34	

* for Motor with 60Hz the flow needs to be increased by 20%

1LE7 IE3 Flow (m³/min)

Frame size	Pole	2	4	6	8
71		1.49	0.75	0.36	0.42
80		1.36	0.66	0.42	0.3
90		2.86	1.34	0.87	0.65
100		3.80	2.10	1.50	1.2
112			2.20	1.70	1.6
132		6.30	4.60	3.10	2.4
160		10.9	6.7	5	6.7
180		11.6	7	5.2	7.0
200		13.7	7.6	8	5.9
225		17	15.0	18	22.4
250		19	15	16	20
280		26	28	23	24
315		40	33	34	43

* for Motor with 60Hz the flow needs to be increased by 20%

For details of separately driven fans for frame size 160 to 315, see also "Separately driven fans" on page 10.

Supply voltage of separately driven fan for 1LE7 motors:
The supply voltage tolerance of the separately driven fan is ±10 %.

Metal Fan

The standard fan made of plastic can be replaced with a fan made of metal (cast Iron). This version is available for motor series 1LE7 (with the exception of 1LE7 with option F90 – version "Motor without external fan and fan-cowl - IC418 - cooled by an airflow"). In case of separately cooled motor (IC416) please enquire for metallic fan.

A metal external fan is an optional feature available from Frame size 71 to 315

Order code F76

In confined spaces, it must be ensured that the minimum spacing is maintained between the fan cover and the wall and/or enclosure cover to prevent motor from over-heating due to reduced cooling-air flow.

- 1) For the frame size codes A, D, F, H, J, K, L, N, T, U, and V (in 14th digit of MLFB), a screwed-on cover (metal) is used in conjunction with the option H03 (condensation drainage holes). Mounted separately driven fans or brakes are only available in sheet metal version.

Minimum Clearance from wall/fan grilles

Frame size	mm
71	15
80, 90, 100	20
112	25
132	30
160	40
180, 200	90
225, 250	100
280, 315	110

Fan cover for textile industry

For 1LE7 motors (with the exception of 1LE7 with option F90 – version "Forced-air cooled motors without external fan and fan cover") the standard version of the fan cover cannot be used in the textile industry.

For the motor series 1LE7 (with the exception of 1LE7 with option F90 – version "Forced-air cooled motors without external fan and fan cover") a special version of the fan cover is available for the textile industry for frame size 80 to Frame size 160.

Order code F75

Motor Protection

The order variants for motor protection are coded with letters in the 15th position of the MLFB and, if necessary, using order codes.

In the standard version, the motor is designed without motor protection.

15th position of the MLFB letter A.

The following applies to all motors:

The motors can withstand 1.5 times the rated current at rated voltage and frequency for two minutes (IEC 60034-1/IS 15999 (Part 1))

Motor-temperature-dependent protective devices and motor temperature detection with converter operation

Depending on the specific requirements, various different components can be built into the motor winding for switching off the motor before it overheats and for monitoring the winding temperature and motor temperature.

Temperature detectors – Bimetal switches

Bimetal switches operate on the principle of mechanical deformation as a result of long-term heating. Bimetal strips bent as a result of such heating have a spring action that results in sudden reversal of the curvature (concave to convex or vice-versa).

When a limit temperature is reached, these temperature detectors (NC contacts) can deactivate an auxiliary circuit. The circuit can only be reclosed following a considerable fall in temperature. Bimetal switches are suitable protection devices in the case of slowly rising motor temperatures. When the motor current rises quickly (e.g. with a locked rotor),

SIMOTICS 1LE7 motors

Overview

these switches are not suitable due to their large thermal time constants.

Temperature detectors for tripping: 15th position of the MLFB letter Z and order code Q3A & Q9A.

PTC thermistors – Thermistor motor protection

PTC thermistors provide the most comprehensive protection against thermal overloading of the motor. A rise in the winding temperature over the admissible value can be accurately detected thanks to the low heat capacity of these PTC (Positive Temperature Coefficient) thermistors and their excellent heat contact with the winding. When the limit temperature is reached rated tripping temperature, the PTC thermistors undergo a sudden change in resistance. This is evaluated by tripping units and can be used to open auxiliary circuits. PTC thermistors cannot themselves be subjected to high currents and voltages. This results in the destruction of the semiconductor. The switching hysteresis of the PTC thermistor and tripping unit is low, which supports fast restarting of the drive. Motor protection of this type is recommended for heavy duty starting, switching duty, extreme changes in load, high ambient temperatures or fluctuating supply systems.

Motor protection with PTC thermistor for tripping - in the terminal box, two auxiliary terminals are required.


15th position of the MLFB letter **B**.

Two temperature sensor circuits are used if a warning is required before the motor is shut down (tripped). The warning is normally set to 10 K below the tripping temperature. Motor protection with PTC thermistor for alarm and tripping. In the terminal box, 4 auxiliary terminals are required.

15th position of the MLFB letter **C**.

PTC sensor characteristic

The PTC thermistor is a temperature-dependent component. At the smallest changes in temperature in the region of the rated shutdown temperature, the resistance of the PTC increases steeply.

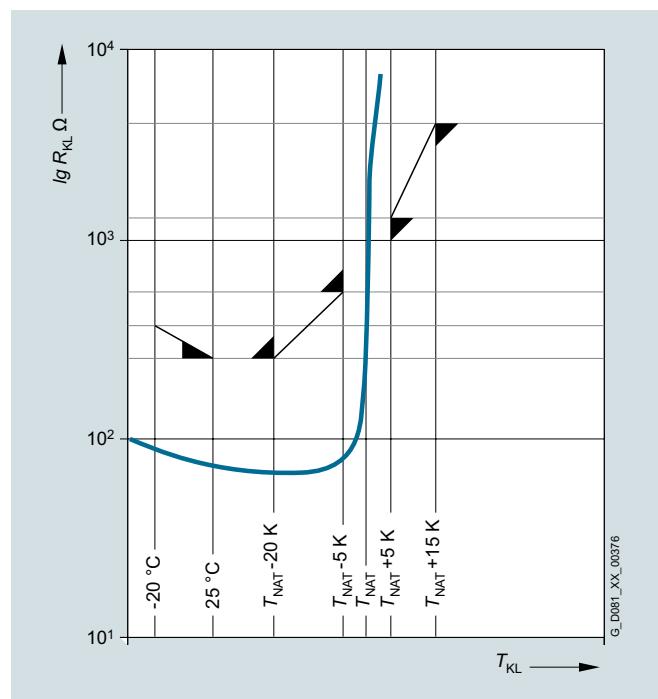

PTC sensor characteristic


Pt100/Pt1000 resistance thermometer

The resistance thermometer has a chip for a temperature sensor, the resistance of which changes in relation to temperature according to a series of reproducible basic values. The changes in resistance are transferred as changes in current. At 0°C, the measurement resistances are adjusted to 100 Ω for the Pt100 and 1000 Ω for the Pt1000, and correspond to the accuracy class B (i.e. the relationship between resistance and temperature). The limit deviation is ±0.3°C, and the admissible deviations are defined in EN 60751.

The Pt1000 resistance thermometer has replaced the KTY84-130 temperature sensors. Similar to the method of operation of the Pt100, the relationship between the temperature and the electrical resistance of conductors is utilized in the Pt1000 to measure the temperature, just like with the additional resistance thermometers described above. Pure metals undergo larger changes in resistance than alloys and have a relatively constant temperature coefficient.

The order options for the Pt100/Pt1000 temperature sensors are described in the option table. (15th position of the MLFB: **H, J, K, L**, or **Z** with order codes **Q1B, Q2B, Q65, Q2B+Q66**). Option codes **Q67, Q68** and **Q72** to be used after **-Z** in MLFB.

Temperatures for alarm and tripping can be set as required when using converters from Siemens that determine the motor temperature in accordance with the measuring principle described above. With these devices, the measured signal is evaluated directly in the converter.

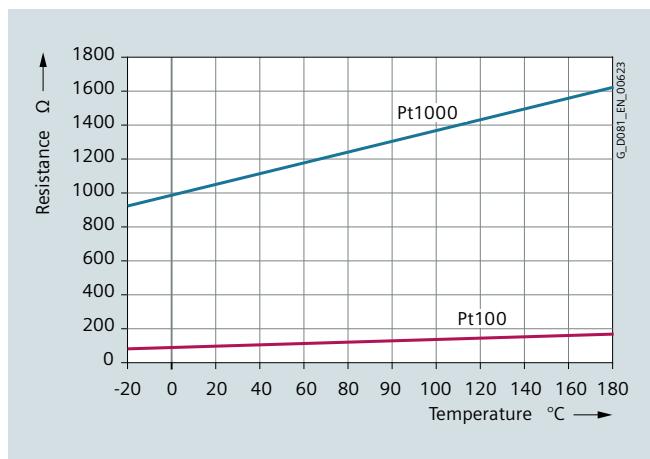Pt100/Pt1000 resistance thermometer characteristicsLocation of the terminal box

The terminal box of the motor can be mounted in four different locations or positions. For 1LE7 motors, the standard terminal box position is on the top (16th position of the MLFB 4).

The position of the terminal box is coded using the 16th position of the motor MLFB.

When defining the position of the terminal box, please observe the following:

- Motors with feet must always be viewed looking onto the drive end with the shaft in the horizontal position. The feet are then approx. 6 O'clock. This is especially important with construction types IM B6, IM B7, and IM B8, and also applies to combined construction types such as IM B35.
- Flange-mounted motors (e.g. IM B5) whose drive-end flange has a condensation drainage hole must always be viewed looking onto the drive end with the shaft in the horizontal position. The condensation drainage hole is then approx. 6 O'clock.

Terminal box on right-hand side:

16th position of the MLFB digit 5

Terminal box on left-hand side:


16th position of the MLFB digit 6

Terminal box below:

16th position of the MLFB digit 7

For Frame size 160 to 315 the LHS/RHS terminal box position is achieved by means of "L" shaped adaptor.


Location of the terminal box with the corresponding digits in the 16th position of the MLFB

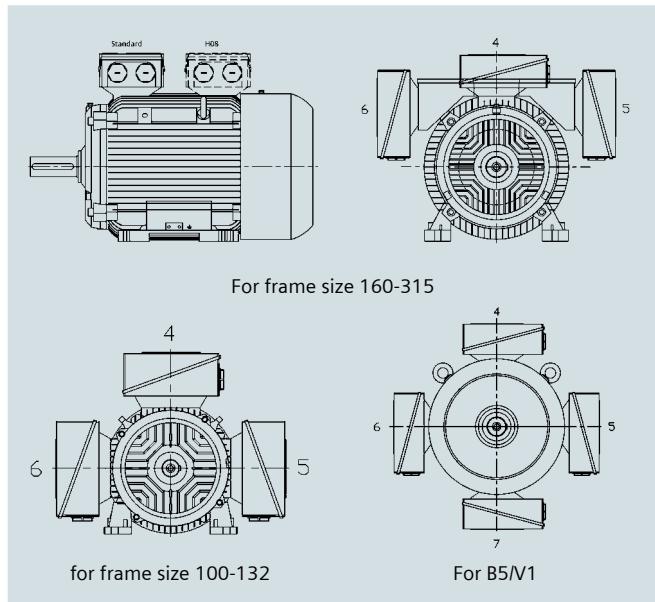

The number of winding ends depends on the winding design. Three-phase motors are connected to the three phase conductors L1, L2 and L3 of a three-phase system. The rated voltage of the motor in the running connection must match the phase conductor voltages of the network.

When the three phases are operating in a time sequence and are connected to the terminals of the motor in alphabetical order U1, V1 and W1, clockwise rotation of the motor shaft is established as viewed onto the drive end. The direction of rotation of the motor can be changed to counterclockwise if two connecting leads are interchanged.

External grounding terminal/external grounding is standard for 1LE7 motors from frame size 71 upwards.

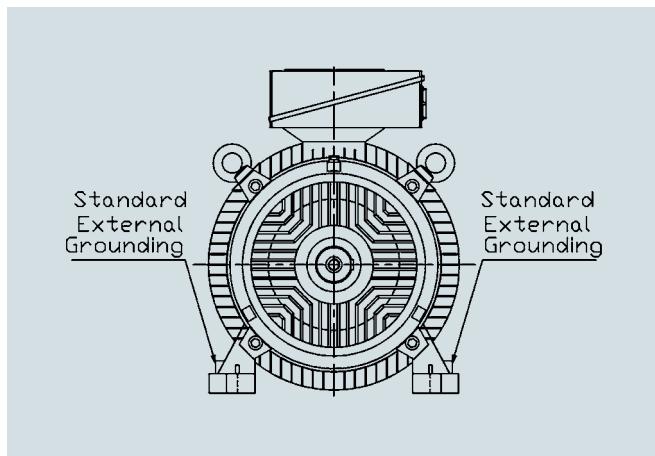

SIMOTICS 1LE7 motors

Overview

Design of the terminal box

The number of terminals and the size of the terminal box are designed for standard requirements.

For special requirements, or on customer request, a larger terminal box can be supplied for frame size 71 upwards.

Larger terminal box

Order code **R50**

If the necessary installation angle of the motor would cause machine components to collide with the terminal box, the terminal box can be moved from the drive end (DE) to the non-drive end (NDE). Only use according to temperature class 155 (F). When the terminal box is rotated to the non-drive end (NDE) of the motor, it is important to note that dimensions "C" and "CA" will not comply with the values specified by IS 1231. Dimensional drawings can be requested via DT Configurator.

Order code **H08**

Cable entry on terminal box

The terminal box can be rotated on the base of the motor housing such that the cable entry is located in the positions given below:

- Towards the drive end (DE)
(rotation of terminal box by 90°, entry from DE) for B5 types of constructions only with order code **H08**
With B14 construction types, the customer must ensure that sufficient space is available for cable outlet.
Order code **R10**
- Towards the fan end (NDE)
(rotation of terminal box by 90°, entry from NDE)
Order code **R11**
- Opposite the standard position 0°
(rotation of terminal box by 180°, entry opposite the standard position 0°)
Order code **R12**

The dimensions of the terminal box are listed in the section "Dimensions" on pages xxx to xxx in accordance with the frame size and the "Dimensional drawings".

If the position of the terminal box (right-hand side, left-hand side, or top) is changed, the position of the cable entry must be checked and, if necessary, ordered with the corresponding order codes (**R10**, **R11**, and **R12**).

Check DTK for providing R10, R11 and R12 along with auxiliary boxes.

Note: Preferred Position of Name Plate is RHS. However if the cable Entry is required from LHS, the Name plate shall be fixed on LHS



Terminal box in standard position, detailed view

Ordering example:

Terminal box on right-hand side (16th position of the MLFB digit 5):

Cable entry is from below unless another order code is specified.

Cable entry from drive end (DE) – MLFB with -Z and order code **R10**.

For cable entry to a standard terminal box, a metal cable gland can be ordered for motor connection.

One metal cable gland – MLFB with -Z and order code **R15**.

One size smaller cable entry can be ordered for motor connection

Order code **R30**

Frame size	Cable entry	
	Std.	Reduced
100/112/132	2 × M32	2 × M25
160/180	2 × M40	2 × M32
200/225	2 × M50	2 × M40
250/280/315	2 × M63	2 × M50

Protruding cable ends

For confined spaces, protruding cable ends can be ordered without a terminal box with cover plate.

The following lengths of protruding cables can be ordered as standard using order codes:

- 6 cables protruding, 0.5 m long
Order code **R22**
- 6 cables protruding, 1.5 m long
Order code **R23**
- 6 cables protruding, 3.0 m long
Order code **R24**

The cross-section of the named cable refers to a coolant temperature of up to 50°C.

Technical specifications for terminal boxes for 1LE7 motors

Frame size	Terminal box	Number of terminals	Thread of the contact screw	Max. connectable cable mm ²	Outer cable diameter (sealing range) mm	Cable entry
Standard/larger (order code R50)						
1LE7						
71 ... 90	TB1E04/TB1E14	6	M4	6 with cable lug	M16 × 1.5: 4.5 ... 10 M25 × 1.5: 9 ... 17	1 × M16 × 1.5 + 1 × M25 × 1.5
100 112	TB1F04/TB1F14	6	M5	6/10	11 ... 21	2 × M32 × 1.5
132	TB1H04/TB1H14	6	M5	6/10	11 ... 21	2 × M32 × 1.5
160	TB1J04/TB1K01	6	M5	25	19 ... 28	2 × M40 × 1.5
180	TB1J04/TB1K01	6	M5/M6	25/35	19 ... 28/ 27 ... 35	2 × M40 × 1.5/ 2 × M50 × 1.5
200	TB1L01/TB1L01	6	M6/M8	35	27 ... 35	2 × M50 × 1.5 / 2 × M50 × 1.5
225	TB1L01/TB1N01	6	M8/M10	35/120	27 ... 35/ 34 ... 42	2 × M50 × 1.5/ 2 × M63 × 1.5
250	TB1N01/TB1Q01	6	M10/M12	120/185	34...42/ 38 ...45	2 × M63 × 1.5 / 2 × M63 × 1.5
280	TB1N01/TB1Q01	6	M10/M12	120/185	34...42/ 38 ...45	2 × M63 × 1.5 / 2 × M63 × 1.5
315	TB1Q01/TB1R01	6	M12/M16	185/300	38 ... 45/ 56 ... 68.5	2 × M63 × 1.5/ 2 × M80 × 2

Note: Thread sizes Cable Entry other than mentioned above can be ordered with order code Y61. Please enquire.

1) Aluminium terminal box. All other terminal boxes are castiron boxes.

Cast iron terminal box can be offered with option R64 where Al.

Terminal boxes are standard, as per below table

Aluminium TB	Cast Iron TB
TB1E04	TB1D01
TB1E14	TB1D11
TB1F04	TB1F01
TB1F14	TB1J01
TB1H04	TB1H01
TB1H14	TB1J01
TB1J04	TB1J01

Auxilliary boxes can be offered only with cast iron terminal box.


2) Designed for cable glands with O-ring.

SIMOTICS 1LE7 motors


Overview

There are two types of auxiliary terminal boxes R62 (TB2J01) and R63 (TB2N01). These auxiliary boxes get automatically selected based on number of auxiliary leads required. Please refer to DTK.

TB2J01-R62

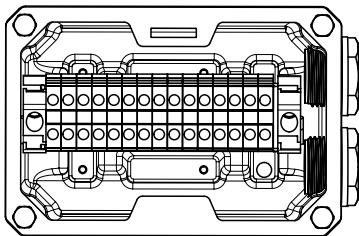

TB2N01-R63

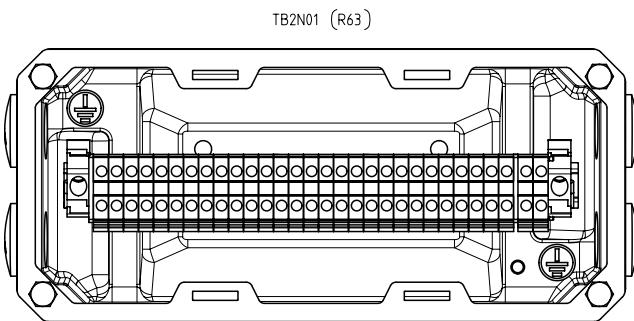

All motors are designed to degree of protection IP55. They can be installed in dusty or humid environments. The motors are suitable for operation in tropical climates.

Brief explanation of the degree of protection

IP55:

- Protection against harmful dust deposits
- Protection against water jets from any direction

IP56:

- Protection against harmful dust deposits
- Protection against powerful water jets from any direction

Order code **H22**

Important: Note that submersion by waves or total immersion, even temporarily, is not permitted especially in the case of motors with fans. This corresponds to IP67 or IP68 degree of protection. Degree of protection IPX7 and IPX8 is currently not available.

IS/IEC 60034-5 defines protection level 6 for water protection as: "Protection against water due to heavy seas or water in a powerful jet". IP56 degree of protection can only be used with the requirement "Protection against a powerful jet" and not for the requirement "Protection against heavy sea".

IP65:

- Complete protection against dust deposits
- Protection against water jets from any direction

Order code **H20**

IS/IEC 60034-5, the code 6 for protection against the ingress of foreign bodies and touch hazard protection for electrical machines.

With motors that have a vertical shaft extension, the end user must prevent an ingress of fluid along the shaft.

For motors with shaft extension pointing downwards, the version "Protective cover for types of construction" order code **H00** is highly recommended, see also the explanations on "Types of construction" on page Standard types of construction and special types of construction.

With flange-mounted motors, for IM V3 type of construction, collection of fluid in the flange basin can be prevented by drainage holes (on request).

The condensation drainage holes at the drive end (DE) and non-drive end (NDE) are sealed (IP55) on delivery. If the condensation drainage holes are ordered for motors of the IM B6, IM B7 or IM B8 type of construction (feet on side or top), the position of the drainage holes will be in the correct position for the type of construction.

Order code **H03**

For motors with IP56 / IP65 enclosure - Brake continues to be with degree of protection IP55

Standard types of construction and special types of construction

Type of construction acc. to IS 2253/ IEC 60034-7	Frame size	Letter of the 14th position of the MLFB	Additional identification code –Z with order code
Without flange			
IM B3/IM 1001	71 to 315L	A	–
IM B6/IM 1051 ¹⁾	71 to 315L	T	–
IM B7/IM 1061 ¹⁾	71 to 315L	U	–
IM B8/IM 1071 ¹⁾	71 to 315L	V	–
IM V5/IM 1011 ¹⁾ without protective cover	71 to 315L	C	–
IM V6/IM 1031 ¹⁾	71 to 315L	D	–
IM V5/IM 1011 ^{1,3)} with protective cover	71 to 315L	C	+ H00 ²⁾
With flange			
IM B5/IM 3001	71 to 315M	F	–
IM V1/IM 3011 without protective cover	71 to 315L	G	–
IM V1/IM 3011 ³⁾ with protective cover	71 to 315L	G	+ H00 ²⁾
IM V3/IM 3031	71 to 315M	H	–
IM B35/IM 2001	71 to 315L	J	–

1) For installation of foot mounting motors on a wall, support should be provided for the mounting feet

3) Standard Double shaft extension (second shaft extension) L05, Y59 and Y63 is not possible.

2) In the case of all types of construction with shaft extension pointing downwards, the version "with protective cover" is highly recommended.

SIMOTICS 1LE7 motors

Overview

Type of construction acc. to IEC 60034-7/ IEC 2253	Frame size	Letter of the 14th position of the MLFB	Additional identification code –Z with order code
With flange			
IM B14/IM 3601		71 to 132M	K
IM V19/IM 3631		71 to 132M	L
IM V18/IM 3611 without protective cover		71 to 132M	M
IM V 18/IM 3611 ²⁾ with protective cover		71 to 132M	M + H00 ²⁾
IM B34/IM 2101		71 to 132M	N

The dimensions of the following types of construction are identical:

IM B3, IM B6, IM B7, IM B8, IM V5 and IM V6

IM B5, IM V1 and IM V3

IM B14, IM V18 and IM V19

Motors in the standard power range can be ordered in basic types of construction

IM B3 and can be operated in mounting positions IM B6*, IM B7*, IM B8*, IM V5*, IM V6*

IM B5 and operated in mounting positions IM V1, IM V3

IM B14 and operated in mounting positions (up to frame size 132) IM V18 and IM V19

Lifting hooks/eye bolts are available for internal only. Within factory premises. Eye bolt is to be used for lifting Motor only. Not to be used for Lifting along with other foundation aux.

and installation in a horizontal position. In conjunction with the lifting hooks/eye bolts, for the purpose of stabilizing the position when the motor is arranged vertically, additional appropriate lifting straps and/or clamping bands must be used.


The motors are designated in accordance with the types of construction on the rating plate.

With motors that have a vertical shaft extension, the end user must prevent an ingress of fluid along the shaft.

1) For installation of foot mounting motors on a wall, support should be provided for the mounting feet

2) In the case of all types of construction with shaft extension pointing downwards, the version "with protective cover" is highly recommended.

3) Standard Double shaft extension (second shaft extension) L05, Y59 and Y63 is not possible.

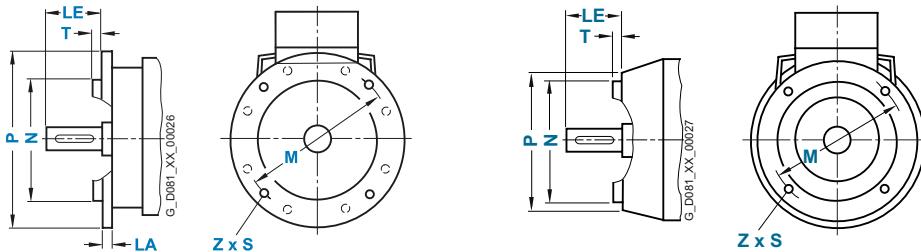

In IS 2223, the frame sizes are allocated "B" type flange with through holes and "C" type flange with tapped holes.

Frame size	Type of construction	Flange type	Flange with through holes ("B" type) Flange with tapped holes ("C" type)	Dimension designation acc. to IEC							
				Acc. to IS 2223		LA	LE	M	N	P	S
71	IM B5, IM B35, IM V1, IM V3	Flange	F 130 B	9	30	130	110	160	10	3.5	4
	IM B14, IM B34, IM V18, IM V19	Flange	F 85 C	—	30	85	70	105	M6	2.5	4
80	IM B5, IM B35, IM V1, IM V3	Flange	F 165 B	10	40	165	130	200	12	3.5	4
	IM B14, IM B34, IM V18, IM V19	Flange	F 100 C	—	40	100	80	120	M6	3	4
90 S/L	IM B5, IM B35, IM V1, IM V3	Flange	F 165 B	10	50	165	130	200	12	3.5	4
	IM B14, IM B34, IM V18, IM V19	Flange	F 115 C	—	50	115	95	140	M8	3	4
100 L	IM B5, IM B35, IM V1, IM V3	Flange	F 215 B	11	60	215	180	250	15	4	4
	IM B14, IM B34, IM V18, IM V19	Flange	F 130 C	—	60	130	110	160	M8	3.5	4
112 M	IM B5, IM B35, IM V1, IM V3	Flange	F 215 B	11	60	215	180	250	15	4	4
	IM B14, IM B34, IM V18, IM V19	Flange	F 130 C	—	60	130	110	160	M8	3.5	4
132 S/M	IM B5, IM B35, IM V1, IM V3	Flange	F 265 B	12	80	265	230	300	15	4	4
	IM B14, IM B34, IM V18, IM V19	Flange	F 165 C	—	80	165	130	200	M10	3.5	4
160 M/L	IM B5, IM B35, IM V1, IM V3	Flange	F 300 B	13	110	300	250	350	19	5	4
180 M/L	IM B5, IM B35, IM V1, IM V3	Flange	F 300 B	13	110	300	250	350	19	5	4
200 L	IM B5, IM B35, IM V1, IM V3	Flange	F 350 B	15	110	350	300	400	19	5	4
225 S/M 2-pole 4- ... 8-pole	IM B5, IM B35, IM V1, IM V3	Flange	F 400 B	16	110	400	350	450	19	5	8
	—	—	—	—	140	—	—	—	—	—	—
250 M	IM B5, IM B35, IM V1, IM V3	Flange	F 500 B	18	140	500	450	550	19	5	8
280 S/M	IM B5, IM B35, IM V1, IM V3	Flange	F 500 B	18	140	500	450	550	19	5	8
315 S/M/L 2-pole 4- ... 8-pole	IM B5, IM B35, IM V1, IM V3	Flange	F 600 B	22	140	600	550	660	24	6	8
	—	—	—	—	170	—	—	—	—	—	—

For IMB5 not available in 315L.

*Validity of Construction please refer pg 39

SIMOTICS 1LE7 motors

Overview

Shaft Extension

60° center hole acc. to DIN 332, Part 2 with M3 to M24 tapped hole depending on the shaft diameter.

DE (shaft extension)	
Diameter mm	Thread mm
7 ... 10	DR M3
> 10 ... 13	DR M4
> 13 ... 16	DR M5
> 16 ... 21	DR M6
> 21 ... 24	DR M8
> 24 ... 30	DR M10
> 30 ... 38	DR M12
> 38 ... 50	DR M16/DS M16
> 50 ... 85	DS M20
> 85 ... 130	DS M24

Shaft made of stainless steel

A shaft made of stainless steel X20Cr13 (IS 6603) can be ordered for the 1LE7 motor series.

Order code **L06**

Non-standard cylindrical shaft extension

The non-standard cylindrical shaft extension can be used on the drive end (DE) (with plain text).

Order code **Y58**. Please enquire

Please also enquire about the transmitted power and admissible cantilever force if belt pulleys, chains or gear pinions are used on the standard, cylindrical shaft extension.

A standard, cylindrical shaft extension (second shaft extension) NDE is not available if a rotary pulse encoder and/or a separately driven fan has been mounted onto the motor. Please enquire for mounted brakes.

Dimensions and tolerances for keyways and keys are designed to IS 2048. The motors are always supplied with a key inserted in the shaft. Unless customer has specifies any other requirements.

All other dimensions are available on request. Please enquire.

It is the responsibility of the customer to ensure that the admissible cantilever forces are reduced in accordance with the non-standard shaft extension.

In case of belt pull forces or any transverse load on the shaft, please confirm the shaft and bearing suitability by enquiry.

Concentricity of shaft extension, coaxiality, and linear movement in accordance with IEC 60072-1 Tolerance R for flange-mounted motors

The following are specified in DIN 42955 with Tolerance N (normal) and Tolerance R (reduced):

1. Concentricity tolerances for the shaft extension
2. Coaxiality tolerances for the shaft extension and flange centering
3. Linear movement tolerances for the shaft extension and flange surface

The concentricity of the shaft extension, coaxiality and linear movement according to IEC 60072-1 Tolerance R for flange-mounted motors can be ordered using order code **L08**.

This order code can be combined for motors with deep-groove bearings of series 62.. and 63... This is not possible in combination with a mounted brake or encoder.

Concentricity of the shaft extension can be ordered according to IEC 60072-1 Tolerance R for types of construction without flange with order code **L07**.

Concentricity tolerance for the shaft extension

Diameter of the cylindrical shaft extension mm	Concentricity tolerance N (normal) mm	R (reduced) mm
≤ 10	0.03	0.015
> 10 ... 18	0.035	0.018
> 18 ... 30	0.04	0.021
> 30 ... 50	0.05	0.025
> 50 ... 80	0.06	0.03
> 80 ... 120	0.07	0.035
> 120 ... 180	0.08	0.04
> 180 ... 250	0.09	0.045
> 250 ... 315	0.1	0.05
> 315 ... 400	0.11	0.055
> 400 ... 500	0.125	0.063
> 500 ... 600	0.14	0.07

IEC dimension code D

Coaxiality tolerance of the centering spigot and linear movement tolerance of the flange surface to the shaft extension axis

Mounting flange Centering diameter N mm	Coaxiality tolerance and linear movement tolerance N (normal) mm	R (reduced) mm
≤ 22	0.05	0.025
> 22 ... < 40	0.06	0.03
40 ... 100	0.08	0.04
> 100 ... 230	0.1	0.05
> 230 ... 450	0.125	0.063
> 450 ... 800	0.16	0.08
> 800 ... 1400	0.2	0.1
> 1400 ... 2000	0.25	0.125
> 2000 ... 2240	0.315	0.16

IEC dimension code N

The flange-mounted motors can be equipped with a radial sealing ring in order to mount on gear box.

Order code H23

It must be ensured that the sealing ring is lubricated using grease, oil mist, or oil spray. (It is not admissible to use pressurized oil > 0.1 bar.) We recommend that the admissible bearing loads are carefully checked.

All rotors are dynamically balanced with an inserted half key. This corresponds to vibration severity grade A (normal or standard). IS/IEC 60034-14 regulates the vibrational behavior of machinery. Based on ISO 8821, the key convention "half key (H)" must be used for balancing.

Note:

If there is a keyway, a full feather key is always inserted on delivery.

The type of key convention is stamped on the nameplate:

F = Balancing with full key
(full-key convention)

H = Balancing with half key
(half-key convention) – standard

N = Balancing without key –
Plain text required (convention without key)

Full-key balancing or balancing with full feather key (F) is possible by specifying order code **L02**.

Balancing without feather key (N) is possible by specifying order code **L01**

Vibration severity grade A is the standard version and is valid up to a rated frequency of 60 Hz.

The low-vibration version B can be supplied to fulfill stricter requirements on smooth running (additional charge).

Order code L00

For details, see standard IS/IEC 60034-14

Noise Level for Line Operation

The noise is measured in a noise proof chamber. It is specified as A-weighted enveloping surface sound pressure level L_{pfA} in dB (A).

This value is the spatial average value of the sound pressure levels measured at the measuring surface. The measuring surface is a cube 1 m away from the surface of the motor. The sound power level is also specified as L_{WA} in dB (A).

The specified values are valid at 50 Hz and rated power (see the selection and ordering data). The tolerance is +3 dB.

Bearing lifetime (nominal lifetime)

The nominal bearing lifetime is defined according to standardized calculation procedures (ISO 281) and is reached or even exceeded for 90 % of the bearings when the motors are operated in compliance with the data provided in the catalog.

Under average operating conditions, a lifetime (L_{10h}) of 50,000 hours can be achieved.

Generally, the bearing lifetime is defined by the bearing size, the bearing load, the operating conditions, the speed and the grease lifetime. A bearing lifetime calculation is possible on request.

Bearing system

The bearing lifetime of motors with horizontal mounting is 50,000 hours if there is no additional axial loading and radial forces at the coupling output and 20,000 hours when utilized according to the maximum admissible load. This assumes that the motor is operated at 50 Hz. The nominal bearing lifetime is reduced for converter operation at higher frequencies.

In order to achieve the calculated lifetime in continuous operation, the admissible vibration values (measured at bearing plate) must be determined according to evaluation zones A and B -stipulated in ISO 10816. If higher vibration velocities occur in operation (e.g. with option **H02**), special measures must be taken (please enquire).

Due to their physical characteristics, variable-speed motors have a different bearing lifetime under the same load conditions – this relationship is linear, i.e. if the frequency increases by 20 % from 50 Hz to 60 Hz, the lifetime decreases by 20 % from 20,000 to 16 000 hours under the load conditions specified in the catalog. Refer Cantilever Forces Sheet pg. 25.

If the frequency falls by 20 % from 50 Hz to 40 Hz, under the load conditions specified in the catalog, the lifetime rises by 20 % from 20 000 to 24 000 hours. Refer Cantilever Forces Sheet pg. 25.

In the basic bearing system, the floating bearing is situated at the drive end (DE) and the located bearing is situated at the non-drive end (NDE).

The DE Bearing can be fixed and NDE Can be made Floating.
Order Code **L20**.

The bearing system is axially preloaded with a spring element at the drive end (DE) to ensure smooth running of the motor without play (see Fig. 1 in the diagrams of bearings on page Diagrams of bearings).

For increased cantilever forces (e.g. belt drives), reinforced bearings can be used at the drive end (DE) for frames 160 to 315.

Order code L22

1LE7 motors in frame sizes 71 to 132, can be supplied with reinforced bearings (size range 03) at both ends.

Order code L25

A measuring nipple for SPM shock pulse measurement can be mounted to check bearing vibration. The motors have an M8 tapped hole for each bearing plate and a measuring nipple with a protective cap. If a second tapped hole is provided, it is fitted with a sealing cap. Not possible for frame sizes < 160.

Order code Q01

SIMOTICS 1LE7 motors

Overview

Permanent lubrication

On motors equipped with permanent lubrication, the bearing grease lifetime is matched to the bearing lifetime. This can, however, only be achieved if the motor is operated in accordance with the catalog specifications.

The motors from frame size 71 to 132 are provided with bearings having permanent lubrication.

The motors from frame size 160 to 315 can also be provided with bearings having permanent lubrication. (For Ball-Ball bearing only and Not for insulated bearing)

Order Code: L33

Regreasing

Regreasing is a standard feature for frame size 160 and upwards.

Frame sizes 160 to 315: M10 x 1 acc. to DIN 3404-A (flat lubricating nipple).

In the case of motors with regreasing, information regarding regreasing intervals, quantity of grease, type of grease and any additional data is provided on the lubrication plate or rating plate.

Mechanical stress and grease lifetime

High speeds that exceed the rated speed with converter operation and the resulting increased vibrations alter the mechanical running smoothness and the bearings are subjected to increased mechanical stress. This reduces the grease lifetime and the bearing lifetime (please enquire where applicable).

The use of rigid couplings should be avoided as far as possible. For converter operation in particular, compliance with the mechanical limit speeds n_{max} is essential, see the

Grease lifetime and regreasing intervals for horizontal installation

Motor series	Frame size	No. of poles	Grease lifetime up to CT 50°C ²⁾	
Permanent lubrication¹⁾				
1LE7	71 ... 132	2 ... 8	20000 h or 50000 h ³⁾	
Regreasing¹⁾				
1LE7	100 ... 160	2 ... 8	Lubrication interval ISO Cl F 155°C	
			CT ≤ 60°C	60°C < CT ≤ 80°C
		2	8000	4000
	180 ... 280	4 ... 8	4000	2000
		2	8000	4000
315	315	2	3000	1500
		4 ... 8	6000	3000

1) For special uses and special greases, please enquire about grease lifetime and regreasing intervals.

2) For every 10 K the coolant temperature is increased above 80°C, the grease lifetime and regreasing interval are halved

following table "Mechanical limit speeds n_{max} ".

Mechanical limit speeds nmax for 1LE7 motors with standard bearing configuration –

Frame size	Type	2-pole	4-pole	6-pole	8-pole
		n_{max} rpm	n_{max} rpm	n_{max} rpm	n_{max} rpm
1LE7..					
71 M	0C...	6000	4200	3600	3000
80 M	0D...	6000	4200	3600	3000
90 S/L	0E...	6000	4200	3600	3000
100 L	1A...	6000	4200	3600	3000
112 M	1B...	6000	4200	3600	3000
132 S/M	1C...	5600	4200	3600	3000
160 M/L	1D...	4800	3600	3000	2400
180 M/L	1E...	4800	4200	4200	4200
200 L	2A...	4800	4800	4800	4800
225 S/M	2B...	4500	4500	4400	4400
250 M	2C...	3900	3700	3700	3700
280 S/M	2D...	3600	3000	3000	3000
315 S/M/L	3A...	3600	2600	2600	2600

The specified limit speeds are applicable to motors without additional mountings, such as brakes or rotary encoders. In such applications, the characteristics of the respective mounting parts must be taken into account.

Bearing assignment for 1LE7 motors

Frame size	No. of poles	Drive end (DE) bearing Horizontal and vertical type of construction	Non-drive end (NDE) bearing Horizontal and vertical type of construction	Fig. No. on page Diagrams of bearings
1LE7				
71	2 ... 8	6202 2ZC3	6202 2ZC3	Fig. 1
80	2 ... 8	6204 2ZC3	6204 2ZC3	Fig. 1
90 S/L	2 ... 8	6205 2ZC3	6204 2ZC3	Fig. 1
100 L	2 ... 8	6206 2ZC3	6206 2ZC3	Fig. 1
112 M	2 ... 8	6206 2ZC3	6206 2ZC3	
132 S/M	2 ... 8	6208 2ZC3	6208 2ZC3	
160 M/L	2 ... 8	6309 C3	6309 C3	Fig. 2
180 M/L	2 ... 8	6310 C3	6310 C3	Fig. 2
200 L	2 ... 8	6312 C3	6312 C3	
225 S/M	2 ... 8	6313 C3	6313 C3	
250 M	2 ... 8	6315 C3	6315 C3	
280 S/M	2	6315 C3	6315 C3	
	4 ... 8	6317 C3	6317 C3	
315 S/M/L	2	6316 C3	6316 C3	
	4 ... 8	6319 C3	6319 C3	

Bearing selection table for 1LE7 motors (bearings reinforced at both ends – order code L25)

Frame size	No. of poles	Drive end (DE) bearing Horizontal and vertical type of construction	Non-drive end (NDE) bearing Horizontal and vertical type of construction	Fig. No. on page Diagrams of bearings
1LE7				
71	2 ... 8	6302 2ZC3	6302 2ZC3	Fig. 1
80	2 ... 8	6304 2ZC3	6304 2ZC3	
90 S/L	2 ... 8	6305 2ZC3	6304 2ZC3	
100 L	2 ... 8	6306 2ZC3	6306 2ZC3	
112 M	2 ... 8	6306 2ZC3	6306 2ZC3	
132 M	2 ... 8	6308 2ZC3	6308 2ZC3	

Bearing selection table for 1LE7motors (bearings for increased cantilever forces – order code L22)

For NU bearings (cylindrical roller bearings), in contrast to ball bearings, a minimum cantilever force is required.

Cylindrical roller bearings are not suitable for coupling output.

$$F_{\min} \sim F_{\max}/2$$

Frame size	No. of poles	Drive end (DE) bearing Horizontal and vertical type of construction	Non-drive end (NDE) bearing Horizontal and vertical type of construction	Fig. No. on page Diagrams of bearings
1LE7				
160 M/L	2 ... 8	NU 309	6309 C3	Fig. 3
180 M/L	2 ... 8	NU 310	6310 C3	
200 L	2 ... 8	NU 312	6312 C3	
225 M	2 ... 8	NU 313	6313 C3	
250 M	2 ... 8	NU 315	6315 C3	
280 M	2	NU 315	6315 C3	
	4 ... 8	NU 317	6317 C3	
315 M/L	2	NU 316	6316 C3	
	4 ... 8	NU 319	6319 C3	

SIMOTICS 1LE7 motors

Overview

Diagrams of bearings

Fig. 1

Drive-end bearing

Non-drive end bearing

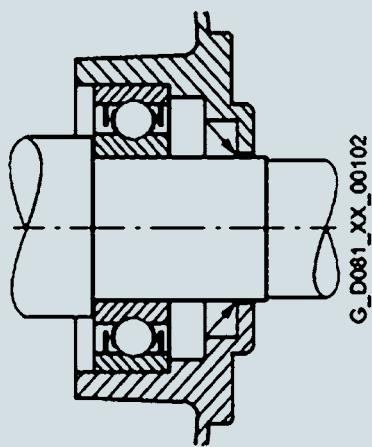
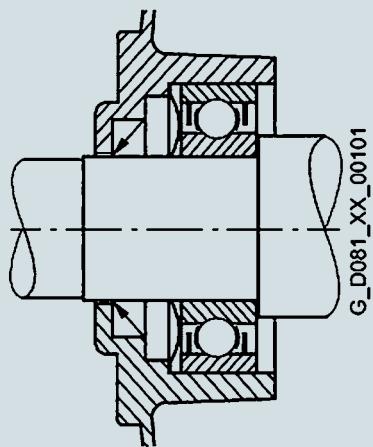


Fig. 2

Drive-end bearing

Non-drive end bearing




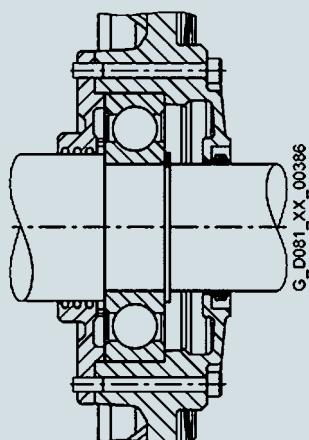



Fig. 3

Drive-end bearing

Non-drive end bearing

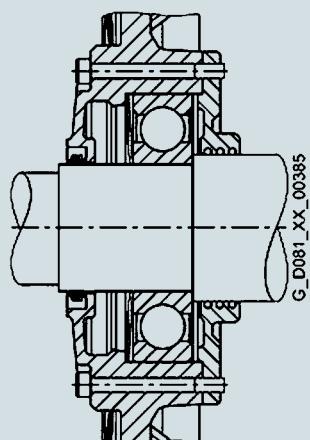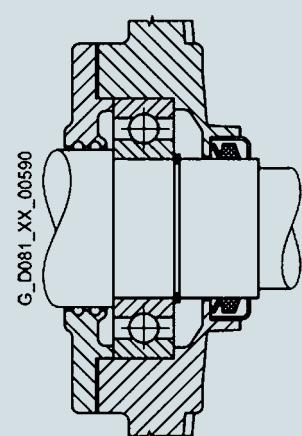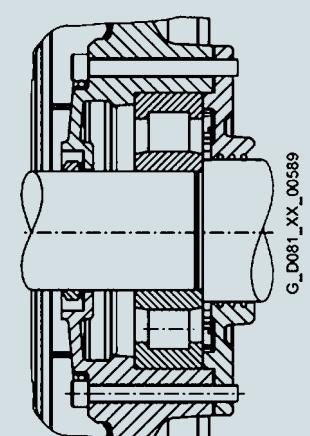

Admissible cantilever forces

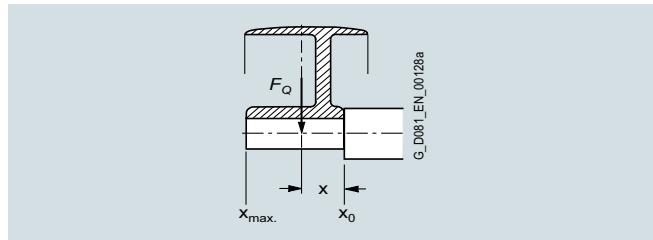

In order to calculate the admissible cantilever forces for a radial load, the line of force (i.e. the centerline of the pulley) of the cantilever force F_Q (N) must be within the free shaft extension (dimension x).

Dimension x (mm) is the distance between the point of application of the force F_Q and the shaft shoulder. The dimension x_{\max} corresponds to the length of the shaft extension.

$$\text{Total cantilever force } F_Q = c \cdot F_u$$

The pre-tension factor c is a value gained from experience from the belt manufacturer. The following approximate value can be assumed:

For normal flat leather belts with an idler pulley $c = 2$;
for V-belts $c = 2$ to 2.5;
for special synthetic belts (depending on the type of load and type of belt) $c = 2$ to 2.5.

The circumferential force F_u (N) is calculated using the following equation

$$F_u = 2 \cdot 10^7 \frac{P}{n \cdot D}$$

F_u circumferential force in N

P rated motor power (transmitted power) in kW

n rated motor speed in rpm

D belt pulley diameter in mm

Admissible cantilever forces – basic version

1LE7 motors at 50 Hz

Valid are: x_0 values for $x = 0$ and x_{\max} values for $x = l$ (l = shaft extension) only for 20,000hrs

For motors Admissible cantilever force

at x_0 at x_{\max}

Frame size	No. of poles	N	N
1LE7			
71	2	390	325
71	4	470	395
71	6	545	435
80	2	665	550
80	4	810	690
80	6	930	795
90	2	710	585
90	4	895	740
90	6	995	840
100	2	995	815
100	4	1080	880
100	6	1400	1120
112	4	1205	975
112	6	1395	1130
132	2	1290	1025
132	4	1825	1460
132	6	2095	1665
160	2	2460	1905
160	4	3035	2420
160	6	3940	3100
180	2	2860	2295
180	4	3615	2875
180	6	4150	3290
200	2	3800	3120
200	4	4820	3960
200	6	6220	5100
225	2	4400	3650
225	4	6110	4875
225	6	7040	5615
250	2	5280	4220
250	4	7515	6050
250	6	8560	6885
250	8	9500	7670
280	2	5200	3695
280	4	8140	6650
280	6	9325	7620
280	8	10300	8415
315(S/M)	2	4660	3960
315(S/M)	4	8765	7035
315(S/M)	6	10515	8435
315(S/M)	8	10205	8445
315(L)	2	4310	3780
315(L)	4	8350	7150
315(L)	6	9970	6160
315(L)	8	11100	4330

In the case of cantilever forces that exceed this, see "Bearings for increased cantilever forces".

SIMOTICS 1LE7 motors

Overview

Admissible cantilever forces – with reinforced deep groove ball bearings for increased cantilever forces – order code L25

1LE7 motors at 50 Hz

Valid are: x_0 values for $x = 0$ and x_{max} values for $x = l$
(l = shaft extension) for 20000

Frame size	No. of poles	Admissible cantilever force at x_0 N	Admissible cantilever force at x_{max} N
1LE7501/03 – Basic Line			
71	2	605	445
71	4	740	425
71	6	860	420
80	2	855	710
80	4	1050	825
80	6	1210	830
90	2	1100	905
90	4	1395	1145
90	6	1565	1300
100	2	1435	1180
100	4	1790	1470
100	6	2030	1625
112	4	1760	1425
112	6	2030	1645
132	2	2260	1755
132	4	2700	2170
132	6	3100	2435
160	2	4905	2895
160	4	6120	2695
160	6	6870	2625
180	2	6225	3560
180	4	7825	3560
180	6	8620	3560
200	2	8570	5280
200	4	10780	5280
200	6	11965	5280
225	2	10340	7390
225	4	12730	6660
225	6	14620	6660
250	2	13635	7605
250	4	16990	9065
250	6	19400	8965
250	8	21000	8845
280	2	13325	9390
280	4	18735	13575
280	6	21455	14065
280	8	23650	14290
315(S/M)	2	13920	6685
315(S/M)	4	22720	12800
315(S/M)	6	26485	12850
315(S/M)	8	29635	11625
315(L)	2	13740	6685
315(L)	4	22885	8375
315(L)	6	26345	6160
315(L)	8	29210	4330

Note:

1. above specified values are for Horizontal Motors only.
2. Above Specified Load are for Cases with radial force only, in case of Axial Force please enquire.

Admissible cantilever forces – with cylindrical roller bearings at DE for increased cantilever forces – order code L22

1LE7 motors at 50 Hz with reinforced deep-groove bearings at DE up to frame size 132 with cylindrical roller bearings at DE in frame size 160 and above

Valid are: x_0 values for $x = 0$ and x_{max} values for $x = l$
(l = shaft extension)

Frame size	No. of poles	Admissible cantilever force at x_0 N	Admissible cantilever force at x_{max} N
1LE7501/03 – Basic Line			
160	2	6200	3000
	4	7630	2890
	6	8370	2850
180	2	6470	4560
	4	7960	4340
	6	8900	4330
200	2	9100	6850
	4	11160	6630
	6	12500	6550
225	2	11070	6780
	4	13350	6620
	6	15100	6620
250	2	16020	6900
	4	19500	8500
	6	22020	8450
	8	24230	8350
280	2	15740	8650
	4	23530	13000
	6	26330	13150
	8	28770	13000
315 S/M	2	16670	7850
	4	27010	11700
	6	29810	11500
	8	33430	11000
315 L	2	16450	7100
	4	26370	10250
	6	30300	10300
	8	32790	9250

When the motors are used or stored outdoors, we recommend that they be kept under some sort of additional cover so that they are not subjected to direct intensive solar radiation, rain, snow, ice or dust over a long period of time. In such cases, technical consultation may be appropriate.

When the motors are used outdoors or in a corrosive environment, it is recommended that non-rusting screws are used externally.

Order code **H07**

Vibration-proof version

Continuous vibration resistance to class 3M4 according to IEC 721-3-3:1994 (order code **H02** in combination with order code **G01, G02, G04, G05, G06, G11, and G12 or F70, G18, G19, G44, G45, Y71, Y74, Y76, Y79** on request only).

Order code **H02**

For Constr. other than IMB, please enquire.

Arrangement of lifting eyes/eyebolts (standard)

Frame Size	Terminal Box Position	Construction	Eye Bolts/Lifting hooks(eye)	Thread Size
71	Top	B3 ¹⁾	–	–
		B5 ²⁾	–	–
80 ⁵⁾	Top	B3 ¹⁾ B5 ²⁾	Two Eye Bolt at center ⁵⁾	M8 ⁵⁾
90	Top	B3 ¹⁾ B5 ²⁾	Two Eye Bolt at center	M8
100	Top/LHS/RHS	B3 ¹⁾	2x Lifting Hooks (eye) at centre ³⁾	–
		B5 ²⁾	1x Left DE Side and 1x Right NDE Side ⁴⁾	M8
112	Top/LHS/RHS	B3 ¹⁾	Two Lifting Hooks (eye) at centre ³⁾	–
		B5 ²⁾	1x Left DE Side and 1x Right NDE Side ⁴⁾	M8
132	Top/LHS/RHS	B3 ¹⁾	Two Lifting Hooks (eye) at centre ³⁾	–
		B5 ²⁾	1x Left DE Side and 1x Right NDE Side ⁴⁾	M8
160	Top/LHS/RHS	B3 ¹⁾	Two Lifting Hooks (eye) at centre ³⁾	–
		B5 ²⁾	1x Left DE Side and 1x Right NDE Side ⁴⁾	M10
180	Top/LHS/RHS	B3 ¹⁾ B5 ²⁾	1x Left DE Side and 1x Right NDE Side ⁴⁾	M12
		B3 ¹⁾ B5 ²⁾	1x Left DE Side and 1x Right NDE Side ⁴⁾	M16
225	Top/LHS/RHS	B3 ¹⁾ B5 ²⁾	1x Left DE Side and 1x Right NDE Side ⁴⁾	M16
		B3 ¹⁾ B5 ²⁾	1x Left DE Side and 1x Right NDE Side ⁴⁾	M20
280	Top/LHS/RHS	B3 ¹⁾ B5 ²⁾	1x Left DE Side and 1x Right NDE Side ⁴⁾	M20
		B3 ¹⁾ B5 ²⁾	1x Left DE Side and 1x Right NDE Side ⁴⁾	M24

- 1) Eye bolt arrangement for B3 is alike for B35, B34 and other foot mounted constructions.
- 2) Eye bolt arrangement for B5 is alike for B5, B14 and other only flange mounted constructions.
- 3) Cast lifting hooks (eye) are provided approximately at center of the housing on top at left and right side.
- 4) 4x lifting eye bolt arrangement is provided. Required 2x eye bolts can be engaged based on terminal box position.
- 5) For Stator housing length >200mm need to use Eye-bolt of M8 Size.

Motor Lifting Arrangement is only provided for Lifting Motor, not to be used for Lifting with Foundation Elements.

SIMOTICS 1LE7 motors

Overview

Separately driven fan

The use of a separately driven fan is recommended to increase motor utilization at low speeds and to limit noise generation at speeds significantly higher than the synchronous speed. Both of these results can only be achieved with converter operation. Please enquire about traction and vibratory operation.

The separately driven fan can be supplied already fitted, order code **F70**. There is no automatic adjustment of the voltage for the separately driven fan when ordering a "special voltage" for the motor. This must be specified in addition using the **Y81** option.

It can also be ordered separately and retrofitted. For selection information and article numbers, see the section "Accessories" (please enquire). A rating plate listing all the important data is fitted to the separately driven fan. Please note the direction of rotation of the separately driven fan (axial-flow fan) when connecting it. Admissible coolant temperatures $CT_{min} -20^{\circ}\text{C}$, $CT_{max} +60^{\circ}\text{C}^1$, lower/higher coolant temperatures are available on request.

When the separately driven fan is mounted, the length of the motor increases by Δl . Please refer the general arrangement drawing for dimensions.


Brakes

Design and mode of operation

The brake takes the form of a single-disk brake with two friction surfaces.

The braking torque is generated by friction when pressure is applied by one or more pressure springs in the de-energized state. The brake is released electromagnetically.

When the motor brakes, the rotor which can be axially shifted on the hub or the shaft is pressed via the armature disk against the friction surface by means of the springs. In the braked state, there is a gap S_{Gap} between the armature disk and the solenoid component. To release the brake, the solenoid is energized with DC voltage. The resulting magnetic force pulls the armature disk against the spring force on to the solenoid component. The spring force is then no longer applied to the rotor, which can rotate freely.

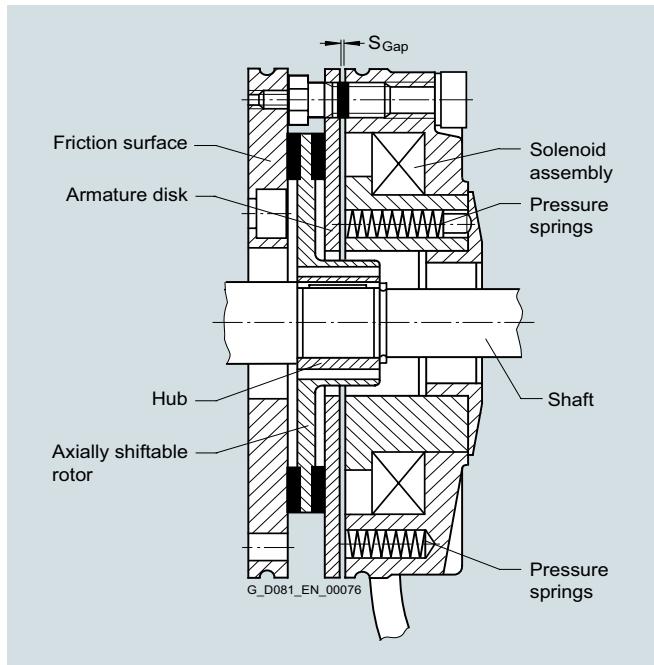

Design of the 14.458 spring-operated disk brake. The image above shows flange (friction surface). However the friction surface will be with friction plate or flange, based on brake size.

Rating plate

The following brake data is specified on the motor rating plate:

- Brake type
- Rectifier Supply voltage
- Frequency
- Current
- Temperature class
- Braking torque

Voltage and frequency

The solenoids and the brake rectifier are designed for connection to the following voltages or can be supplied for the following voltages:

- Brake supply voltage 24 V DC
Order code **F10**
- Brake rectifier supply voltage 230 V AC
Order code **F11**
- Brake rectifier supply voltage 400 V AC
(directly at the terminal strip)
Order code **F12**
- Brake rectifier supply voltage 240 V AC
(directly at the terminal strip)
Order code **F13**
- Brake rectifier supply voltage 415 V AC
(directly at the terminal strip)
Order code **F14**

When 60 Hz is used, the voltage for the brake must not be increased!

Order codes **F10, F11, F12, F13** and **F14** must only be used in conjunction with order code **F07**.

Lifetime of the brake lining

The braking energy L_N until readjustment of the brake depends on various factors. The main influencing factors include the masses to be braked, the operating speed, the switching frequency, and therefore the temperature at the frictional surfaces. This means it is not possible to specify a value for the friction energy until readjustment that is valid for all operating conditions.


Changing the braking torque

The brake is supplied with the braking torque already set.

For 14.458 brakes, the torque can be reduced to the dimension O_1 by unscrewing the adjusting ring with a hook wrench. The braking torque changes by the values shown in the above table for each notch of the adjusting ring.

Readjusting the air gap

Under normal operating conditions, the brake is practically maintenance-free. The air gap S_{Gap} must only be checked at regular intervals if the application requires an extremely large amount of frictional energy and readjusted to the rated air gap S_{Gap} rated at the latest when the maximum air gap $S_{\text{Gap}}_{\text{max}}$ is reached.

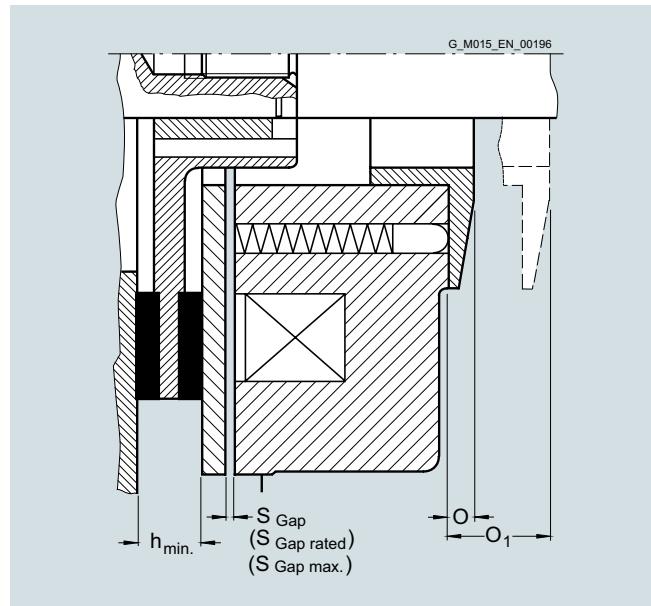

Connection

Labeled terminals are provided in the main terminal box of the motor to connect the brake.

The AC voltage for the brake excitation winding is connected to the two free terminals of the rectifier block (~).

The brake can be released when the motor is at a standstill by separately exciting the solenoid. In this case, an AC voltage must be connected at the rectifier block terminals. The brake remains released as long as this voltage is present.

For 24 V DC brakes, the brake terminals are directly connected to the DC voltage source.

Note: DC Source in the Scope of Customer

Mechanical manual brake release with lever

The brakes can be supplied with a mechanical manual release with lever.

Order code **F50**

The dimensions of the brake lever depend on the motor frame size and can be read from the dimensional drawing generator for motors in the DT Configurator tool for low-voltage motors.

SIMOTICS 1LE7 motors

Selection and ordering data

Selection and ordering data for 2pole IE2 efficiency class motors

Operating values at rated output													Cast-iron series																			
P _{rated} , 50 Hz	Frame size	n _{rated} , 50 Hz Hz	T _{rated} , 50 Hz	IE class	η _{rated} , 50 Hz, 4/4	η _{rated} , 50 Hz, 3/4	η _{rated} , 50 Hz, 2/4	cos φ _{rated}	I _{rated} , 50 Hz, 400 V 4/4	T _{LR} / T _{rated} , 50 Hz	I _{LR} / I _{rated} , 50 Hz	T _B / T _{rated} , 50 Hz	m _{IM B3}	GD ² of Rotor	Torque class																	
kW	FS	rpm	kgfm	50 Hz	%	%	%	A					kg	kgfm ²	CL																	
• Cooling: self-ventilated (IC411)																																
• Efficiency: IE2 High Efficiency, service factor (SF) 1.15																																
• Insulation: thermal class 155 (temperature class F), IP55 degree of protection, utilization in accordance with thermal class 130 (temperature class B)																																
2-pole: 3000 rpm at 50 Hz																																
0.37	71 M	2763	0.13	IE2	72.2	72.2	71.2	0.80	0.89	2.6	4.3	2.5	1LE7501-0CA2	-	11	0.0011 16																
0.55	71 M	2777	0.19	IE2	75.1	75.1	74.1	0.81	1.3	2.9	4.6	2.9	1LE7501-0CA3	-	11	0.0015 16																
0.75	80 M	2798	0.26	IE2	77.8	77.8	77.2	0.83	1.6	2.5	4.9	2.5	1LE7501-0DA2	-	17	0.0027 16																
1.1	80 M	2815	0.38	IE2	80.4	80.4	79.4	0.84	2.3	2.8	5.5	2.6	1LE7501-0DA3	-	17	0.0037 16																
1.5	90 S	2880	0.51	IE2	82.1	82.1	80.0	0.85	3	3.0	6.5	3.4	1LE7501-0EA0	-	21	0.0064 16																
2.2	90 L	2890	0.74	IE2	83.9	83.9	83.3	0.87	4.2	2.4	7.0	3.5	1LE7501-0EA4	-	25	0.0092 16																
3.7	100 L	2845	1.3	IE2	85.9	85.9	85.9	0.87	6.9	4.0	7.0	4.0	1LE7501-1AA5	-	35	0.0156 16																
5.5	132 S	2935	1.8	IE2	87.6	87.6	86.6	0.87	10	2.4	7.0	3.4	1LE7501-1CA0	-	53	0.0532 16																
7.5	132 S	2925	2.5	IE2	88.6	88.6	88.6	0.90	13	2.4	7.0	3.4	1LE7501-1CA1	-	66	0.0637 16																
11	160 M	2920	3.7	IE2	89.6	89.6	89.3	0.89	19	2.1	6.0	2.8	1LE7501-1DA2	-	98	0.0127 16																
15	160 M	2925	5	IE2	90.6	90.6	90.4	0.90	26	2.2	6.0	3.0	1LE7501-1DA3	-	102	0.1681 16																
18.5	160 L	2930	6.1	IE2	91.1	91.1	90.6	0.89	32	2.7	6.5	3.0	1LE7501-1DA4	-	123	0.1938 16																
22	180 M	2930	7.3	IE2	91.5	91.5	91.3	0.90	37	2.6	6.5	3.0	1LE7501-1EA2	-	163	0.3164 16																
30	200 L	2955	9.9	IE2	92.2	92.2	91.8	0.83	55	2.6	7.0	3.5	1LE7501-2AA4	-	225	0.5037 16																
37	200 L	2950	12	IE2	92.6	92.6	92.2	0.87	64	2.5	7.0	3.2	1LE7501-2AA5	-	230	0.5862 16																
45	225 M	2960	15	IE2	93.0	93.0	92.6	0.87	77	2.9	7.0	3.0	1LE7501-2BA2	-	295	0.9082 16																
55	250 M	2975	18	IE2	93.5	93.5	93.0	0.86	95	2.8	6.8	3.0	1LE7501-2CA2	-	300	1.86 16																
75	280 S	2973	25	IE2	93.8	93.8	92.5	0.87	128	2.6	6.5	3.0	1LE7501-2DA0	-	505	3.09 16																
90	280 M	2977	29	IE2	94.1	94.1	93.0	0.89	150	3.5	7.0	4.0	1LE7501-2DA2	-	560	3.80 16																
110	315 S	2985	36	IE2	94.5	94.5	94.3	0.90	180	2.0	6.8	2.6	1LE7501-3AA0	-	745	5.58 13																
132	315 M	2982	43	IE2	94.6	94.6	93.2	0.88	221	1.9	7.0	2.7	1LE7501-3AA2	-	825	6.88 13																
160	315 L	2985	52	IE2	95.0	95.0	94.0	0.92	255	2.8	7.0	3.2	1LE7501-3AA4	-	1100	9.15 16																
200	315 L	2984	65	IE2	95.3	95.3	95.0	0.92	317	2.5	7.0	3.0	1LE7501-3AA5	-	1110	9.52 16																
Voltages ²⁾																																
No. of poles																																
50 Hz	240 VΔ/415 VY			2	71 M ... 90 S			1LE7501-0C ... -OE			Standard			2	3																	
50 Hz	415 VΔ			2	90L ... 315 L			1LE7501-0E ... -3A			Standard			3	5																	
For other voltages ¹⁾ and more information, code letters and descriptions, please refer Page 37																...																
Types of construction																Order code(s)																
No. of poles																																
Without flange	IM B3 ³⁾			2	71 M ... 315 L			1LE7501-0C ... -3A			Standard			A																		
With flange	IM B5 ³⁾			2	71 M ... 315 M			1LE7501-0C ... -3A			With additional charge			F																		
Further types of construction and more information, code letters and descriptions, please refer Page 37																...																
Motor protection																Order code(s)																
Line																																
Without	2			71 M ... 315 L			1LE7501-0C ... -3A			Standard				A																		
Further motor protection and more information, code letters and descriptions, please refer Page 38																...																
Terminal box position																Order code(s)																
No. of poles																																
Terminal box at top	2			71 M ... 315 L			1LE7501-0C ... -3A			Standard				4	-																	
Further terminal box positions and more information, code letters and descriptions, please refer Page 38																...																

1) Operating values at rated output for 60 Hz are stored in the Drive Technology (DT) configurator.

2) Parallel supply lines are required in the case of connection to ≤ 240V. For frame size 315 with connection to ≤ 240V, due to the high current, a drilled, removable entry plate (Order code R52) or a larger terminal box (Order code R50) can be used. Order codes R52 and R50 alter the motor dimensions.

3) Types derived from IM B3 (IM B6/7/8, IM V6 and IM V5), from IM B5 (IM V3 and IM V1) and from IM B14 (IM V19 and IM V18) are possible, provided that no requirement exists for stamping of the type on the rating plate. The basic type IM B3, IM B5 or IM B14 is stamped as standard on the rating plate. If mounted in a different position, the position must be specified to ensure that the condensation drainage holes are positioned correctly.

Selection and ordering data

Selection and ordering data for 4pole IE2 efficiency class motors

Operating values at rated output												Cast-iron series					
P _{rated} , 50 Hz	Frame size	n _{rated} , 50 Hz	T _{rated} , 50 Hz	IE class	η _{rated} , 50 Hz, 4/4	η _{rated} , 50 Hz, 3/4	η _{rated} , 50 Hz, 2/4	COS φ _{rated} ,	I _{rated} , 50 Hz, 400 V	T _{L/R} / T _{rated} , 50 Hz	I _{LR} / I _{rated} , 50	T _B / T _{rated} , 50 Hz	m _{IM B3}	GD ² of Rotor	Torque class		
kW	FS	rpm	kgfm	50 Hz	%	%	%		A				kg	kgfm ²	CL		
<ul style="list-style-type: none"> Cooling: self-ventilated (IC411) Efficiency: IE2 High Efficiency, service factor (SF) 1.15 Insulation: thermal class 155 (temperature class F), IP55 degree of protection, utilization in accordance with thermal class 130 (temperature class B) 																	
4-pole: 1500 rpm at 50 Hz																	
0.25	71 M	1380	0.17	IE2	69.6	69.6	66.4	0.69	0.72	2.5	3.7	2.5	1LE7501-0CB2	■ - ■ ■ ■ ■ ■	11	0.0026	16
0.37	71 M	1430	0.26	IE2	73.7	73.7	70.7	0.72	0.97	2.5	4.0	2.4	1LE7501-0CB3	■ - ■ ■ ■ ■ ■	12	0.0033	16
0.55	80 M	1433	0.37	IE2	77.8	77.4	73.4	0.72	1.4	2.8	5.3	2.8	1LE7501-0DB2	■ - ■ ■ ■ ■ ■	16	0.0061	16
0.75	80 M	1431	0.51	IE2	79.9	79.9	77.2	0.75	1.7	2.8	5.8	2.8	1LE7501-0DB3	■ - ■ ■ ■ ■ ■	18	0.0078	16
1.1	90 S	1431	0.75	IE2	82.2	82.2	81.6	0.78	2.4	2.8	5.7	2.8	1LE7501-0EB0	■ - ■ ■ ■ ■ ■	21	0.0100	16
1.5	90 L	1440	1	IE2	83.5	83.5	82.9	0.79	3.2	2.8	6.0	3.1	1LE7501-0EB4	■ - ■ ■ ■ ■ ■	24	0.0132	16
2.2	100 L	1445	1.5	IE2	84.3	84.3	83.3	0.76	4.8	2.8	6.6	3.0	1LE7501-1AB4	■ - ■ ■ ■ ■ ■	31	0.0279	16
3.7	112 M	1450	2.5	IE2	86.3	86.3	86.0	0.81	7.4	2.6	6.5	2.9	1LE7501-1BB2	■ - ■ ■ ■ ■ ■	43	0.0422	16
5.5	132 S	1455	3.7	IE2	87.7	87.7	86.7	0.79	11	2.4	6.8	2.8	1LE7501-1CBO	■ - ■ ■ ■ ■ ■	68	0.0792	13
7.5	132 M	1465	5	IE2	88.7	88.7	87.7	0.79	15	2.6	7.0	2.5	1LE7501-1CB2	■ - ■ ■ ■ ■ ■	70	0.1059	13
11	160 M	1455	7.3	IE2	89.8	89.8	87.3	0.80	21	2.9	7.0	2.9	1LE7501-1DB2	■ - ■ ■ ■ ■ ■	96	0.1857	16
15	160 L	1465	10	IE2	90.7	90.7	90.3	0.84	27	2.9	7.0	2.9	1LE7501-1DB4	■ - ■ ■ ■ ■ ■	97	0.2425	16
18.5	180 M	1465	12	IE2	91.2	91.2	90.8	0.82	34	2.7	7.0	2.9	1LE7501-1EB2	■ - ■ ■ ■ ■ ■	160	0.5000	16
22	180 L	1470	15	IE2	91.8	91.8	91.5	0.83	40	2.9	7.0	2.9	1LE7501-1EB4	■ - ■ ■ ■ ■ ■	174	0.5534	16
30	200 L	1470	20	IE2	92.3	92.3	92.0	0.80	57	2.7	7.0	3.2	1LE7501-2AB5	■ - ■ ■ ■ ■ ■	234	0.7810	16
37	225 S	1475	25	IE2	92.7	92.7	92.4	0.87	64	2.6	7.0	3.0	1LE7501-2B80	■ - ■ ■ ■ ■ ■	298	1.7562	16
45	225 M	1485	30	IE2	93.2	93.2	93.0	0.87	77	2.8	7.0	3.1	1LE7501-2BB2	■ - ■ ■ ■ ■ ■	314	2.0756	16
55	250 M	1486	36	IE2	93.5	93.5	93.0	0.81	101	3.0	7.0	3.5	1LE7501-2CB2	■ - ■ ■ ■ ■ ■	396	3.25	16
75	280 S	1485	49	IE2	94.0	94.0	93.5	0.83	134	3.0	7.0	3.5	1LE7501-2DB0	■ - ■ ■ ■ ■ ■	555	5.49	16
90	280 M	1488	59	IE2	94.2	94.2	94.0	0.83	160	3.0	7.0	3.5	1LE7501-2DB2	■ - ■ ■ ■ ■ ■	635	6.48	16
110	315 S	1489	72	IE2	94.7	94.7	94.5	0.85	190	2.5	6.8	3.5	1LE7501-3AB0	■ - ■ ■ ■ ■ ■	735	8.78	16
132	315 M	1487	86	IE2	94.9	94.9	94.7	0.85	228	2.8	7.0	2.5	1LE7501-3AB2	■ - ■ ■ ■ ■ ■	905	10.75	16
160	315 L	1490	105	IE2	95.1	95.1	95.0	0.87	269	2.5	7.0	2.5	1LE7501-3AB4	■ - ■ ■ ■ ■ ■	985	13.75	16
200	315 L	1380	131	IE2	95.3	95.3	95.1	0.87	336	2.9	7.0	2.7	1LE7501-3AB5	■ - ■ ■ ■ ■ ■	1180	17.42	16
Voltages²⁾		No. of poles	Frame size		Motor type		Version						Order code(s)				
50 Hz	240 VΔ/415 VY		4	71 M ... 90L		1LE7501-0C ... -OE		Standard		2	3				-		
50 Hz	415 VΔ		4	100L ... 315 L		1LE7501-1A ... -3A		Standard		3	5				-		
For other voltages ¹⁾ and more information, code letters and descriptions, please refer Page 37															...		
Types of construction		No. of poles	Frame size		Motor type		Version						Order code(s)				
Without flange	IM B3 ³⁾		4	71 M ... 315 L		1LE7501-0C ... -3A		Standard				A			-		
With flange	IM B5 ³⁾		4	71 M ... 315 M		1LE7501-0C ... -3A		With additional charge			F				-		
Further types of construction and more information, code letters and descriptions, please refer Page 37															...		
Motor protection		Line	No. of poles	Frame size		Motor type		Version					Order code(s)				
Without			4	71 M ... 315 L		1LE7501-0C ... -3A		Standard			A				-		
Further motor protection and more information, code letters and descriptions, please refer Page 38															...		
Terminal box position		No. of poles	Frame size		Motor type		Version						Order code(s)				
Terminal box at top			4	71 M ... 315 L		1LE7501-0C ... -3A		Standard				4			-		
Further terminal box positions and more information, code letters and descriptions, please refer Page 38															...		

1) Operating values at rated output for 60 Hz are stored in the Drive Technology (DT) configurator.

2) Parallel supply lines are required in the case of connection to ≤ 240V. For frame size 315 with connection to ≤ 240V, due to the high current, a drilled, removable entry plate (Order code R52) or a larger terminal box (Order code R50) can be used. Order codes R52 and R50 alter the motor dimensions.

3) Types derived from IM B3 (IM B6/7/8, IM V6 and IM V5), from IM B5 (IM V3 and IM V1) and from IM B14 (IM V19 and IM V18) are possible, provided that no requirement exists for stamping of the type on the rating plate. The basic type IM B3, IM B5 or IM B14 is stamped as standard on the rating plate. If mounted in a different position, the position must be specified to ensure that the condensation drainage holes are positioned correctly.

SIMOTICS 1LE7 motors

Selection and ordering data

Selection and ordering data for 6pole IE2 efficiency class motors

Operating values at rated output													Cast-iron series			
P _{rated} , 50 Hz	Frame size	n _{rated} , 50 Hz Hz	T _{rated} , 50 Hz	IE class	η _{rated} , 50 Hz, 4/4	η _{rated} , 50 Hz, 3/4	η _{rated} , 50 Hz, 2/4	cos φ _{rated}	I _{rated} , 50 Hz, 400 V 4/4	T _{LR} / T _{rated} , 50 Hz	I _{LR} / I _{rated} , 50 Hz	T _B / T _{rated} , 50 Hz	m _{IM B3}	GD ² of Rotor	Torque class	
kW	FS	rpm	kgfm	50 Hz	%	%	%		A				kg	kgfm ²	CL	
<ul style="list-style-type: none"> Cooling: self-ventilated (IC411) Efficiency: IE2 High Efficiency, service factor (SF) 1.15 Insulation: thermal class 155 (temperature class F), IP55 degree of protection, utilization in accordance with thermal class 130 (temperature class B) 																
6-pole: 1000 rpm at 50 Hz																
0.18	71 M	894	0.2	IE2	57.9	57.9	56.9	0.69	0.63	2.2	2.5	2.5	1LE7501-0CC2	-	11	0.0029 16
0.25	71 M	880	0.28	IE2	62.8	62.8	61.8	0.70	0.79	2.3	2.8	2.4	1LE7501-0CC3	-	11	0.0036 16
0.37	80 M	925	0.39	IE2	69.0	69.0	65.0	0.69	1.1	2.1	4.0	2.4	1LE7501-0DC2	-	14	0.0063 16
0.55	80 M	938	0.57	IE2	74.1	74.1	72.0	0.67	1.5	2.5	4.4	2.9	1LE7501-0DC3	-	17	0.0090 16
0.75	90 S	937	0.78	IE2	76.8	76.8	75.8	0.72	1.9	2.0	4.1	2.4	1LE7501-0EC0	-	21	0.0124 16
1.1	90 L	940	1.1	IE2	79.0	79.0	78.0	0.72	2.7	2.2	4.4	2.4	1LE7501-0EC4	-	28	0.0171 16
1.5	100 L	945	1.5	IE2	80.6	80.6	80.6	0.74	3.5	2.3	5.2	2.5	1LE7501-1AC4	-	30	0.0310 16
2.2	112 M	945	2.3	IE2	82.6	82.6	82.6	0.73	5.1	2.6	5.5	2.6	1LE7501-1BC2	-	42	0.0432 16
3.7	132 S	965	3.7	IE2	84.8	84.8	83.0	0.70	8.7	2.6	6.0	2.8	1LE7501-1CC1	-	61	0.0842 16
5.5	132 M	965	5.6	IE2	86.5	86.3	84.0	0.70	13	2.6	6.0	2.8	1LE7501-1CC3	-	73	0.1165 13
7.5	160 M	975	7.5	IE2	87.3	87.3	87.0	0.78	15	2.5	6.0	2.6	1LE7501-1DC2	-	100	0.3985 16
11	160 L	975	11	IE2	88.9	88.9	88.6	0.78	22	2.5	6.0	2.6	1LE7501-1DC4	-	106	0.5618 16
15	180 L	970	15	IE2	89.9	89.9	89.6	0.78	30	2.2	6.0	2.4	1LE7501-1EC4	-	210	0.7441 13
18.5	200 L	980	18	IE2	90.6	90.6	90.3	0.79	36	2.8	6.0	2.8	1LE7501-2AC4	-	231	1.0634 16
22	200 L	980	22	IE2	91.1	91.1	90.8	0.81	41	2.4	6.5	2.3	1LE7501-2AC5	-	233	1.2738 13
30	225 M	980	30	IE2	91.9	91.9	91.6	0.81	56	2.9	6.5	3.0	1LE7501-2BC2	-	296	2.4027 16
37	250 M	983	37	IE2	92.4	92.4	92.2	0.81	69	2.5	6.6	3.0	1LE7501-2CC2	-	370	3.55 16
45	280 S	986	44	IE2	92.9	92.9	92.7	0.79	85	3.0	7.0	3.0	1LE7501-2DC0	-	515	4.41 16
55	280 M	987	54	IE2	93.3	93.3	92.8	0.77	107	3.5	7.0	3.0	1LE7501-2DC2	-	520	5.86 16
75	315 S	990	74	IE2	93.9	93.9	93.7	0.80	139	3.0	7.0	3.3	1LE7501-3AC0	-	720	9.46 16
90	315 M	990	89	IE2	94.2	94.2	94.0	0.83	160	2.6	6.8	2.5	1LE7501-3AC2	-	790	11.19 16
110	315 L	990	108	IE2	94.5	94.5	94.3	0.85	191	2.7	7.0	2.6	1LE7501-3AC4	-	930	14.85 16
132	315 L	990	130	IE2	94.8	94.8	94.6	0.84	231	3.0	7.0	2.7	1LE7501-3AC5	-	960	16.86 16
Voltages ²⁾		No. of poles	Frame size	Motor type			Version			Order code(s)						
50 Hz	240 VΔ/415 VY		6	71 M ... 100 L			1LE7501-0C ... -1A			2	3				-	
50 Hz	415 VΔ		6	112 M ... 315 L			1LE7501-1B ... -3A			3	5				-	
For other voltages ¹⁾ and more information, code letters and descriptions, please refer Page 37																
Types of construction		No. of poles	Frame size	Motor type			Version			Order code(s)						
Without flange	IM B3 ³⁾		6	71 M ... 315 L			1LE7501-0C ... -3A			A					-	
With flange	IM B5 ³⁾		6	71 M ... 315 M			1LE7501-0C ... -3A			F					-	
Further types of construction and more information, code letters and descriptions, please refer Page 37																
Motor protection		Line	No. of poles	Frame size	Motor type			Version			Order code(s)					
Without	6		71 M ... 315 L	1LE7501-0C ... -3A			Standard			A					-	
Further motor protection and more information, code letters and descriptions, please refer Page 38																
Terminal box position		No. of poles	Frame size	Motor type			Version			Order code(s)						
Terminal box at top		2	71 M ... 315 L	1LE7501-0C ... -3A			Standard			4	-					
Further terminal box positions and more information, code letters and descriptions, please refer Page 38																

1) Operating values at rated output for 60 Hz are stored in the Drive Technology (DT) configurator.

2) Parallel supply lines are required in the case of connection to ≤ 240V. For frame size 315 with connection to ≤ 240V, due to the high current, a drilled, removable entry plate (Order code R52) or a larger terminal box (Order code R50) can be used. Order codes R52 and R50 alter the motor dimensions.

3) Types derived from IM B3 (IM B6/7/8, IM V6 and IM V5), from IM B5 (IM V3 and IM V1) and from IM B14 (IM V19 and IM V18) are possible, provided that no requirement exists for stamping of the type on the rating plate. The basic type IM B3, IM B5 or IM B14 is stamped as standard on the rating plate. If mounted in a different position, the position must be specified to ensure that the condensation drainage holes are positioned correctly.

Selection and ordering data

Selection and ordering data for 2pole IE3 efficiency class motors

Operating values at rated output														Cast-iron series			
P _{rated} , 50 Hz	Frame size	n _{rated} , 50 Hz	T _{rated} , 50 Hz	IE	η _{rated} , 50 Hz, 4/4	η _{rated} , 50 Hz, 3/4	η _{rated} , 50 Hz, 2/4	cos φ _{rated}	I _{rated} , 50 Hz, 400 V	T _{LR} /I _{rated} , 50 Hz	I _{LR} /I _{rated} , 50	T _B /T _{rated} , 50 Hz	m _{IM B3}	GD ² of Rotor	Torque class		
kW	FS	rpm	kgfm	50 Hz %	%	%	A	kg	kgfm ²	CL							
<ul style="list-style-type: none">• Cooling: self-ventilated (IC411)• Efficiency: IE3 Premium Efficiency, service factor (SF) 1.15• Insulation: thermal class 155 (temperature class F), IP55 degree of protection, utilization in accordance with thermal class 130 (temperature class B)																	
2-pole: 3000 rpm at 50 Hz																	
0.37	71 M	2800	0.13	IE3	74.8	73.8	68.0	0.78	0.88	2.5	4.5	2.5	1LE7503-0CA2	-	11	0.0011	16
0.55	71 M	2780	0.19	IE3	77.8	77.8	74.0	0.81	1.2	2.5	5.0	2.5	1LE7503-0CA3	-	11	0.0015	16
0.75	80 M	2850	0.26	IE3	82.0	82.0	80.0	0.83	1.5	2.5	6.0	2.7	1LE7503-0DA2	-	18	0.0032	13
1.1	80 M	2840	0.38	IE3	82.7	82.7	80.0	0.82	2.3	3.0	6.0	3.0	1LE7503-0DA3	-	18	0.0039	16
1.5	90 S	2880	0.51	IE3	84.9	84.9	84.9	0.86	2.9	2.5	7.0	3.5	1LE7503-0EA0	-	25	0.0082	10
2.2	90 L	2885	0.74	IE3	85.9	85.9	85.0	0.87	4.1	3.5	7.5	3.6	1LE7503-0EA4	-	28	0.0092	16
3.7	100 L	2865	1.3	IE3	87.8	87.8	87.0	0.85	6.9	2.3	7.5	3.0	1LE7503-1AA5	-	37	0.0156	13
5.5	132 S	2935	1.8	IE3	89.2	89.2	86.0	0.84	10	2.7	7.5	3.9	1LE7503-1CA0	-	55	0.0532	16
7.5	132 S	2935	2.5	IE3	90.1	90.1	88.0	0.85	14	3.0	7.7	3.9	1LE7503-1CA1	-	67	0.0659	16
11	160 M	2947	3.6	IE3	91.5	91.5	90.5	0.88	19	2.8	7.2	3.5	1LE7503-1DA2	-	120	0.1681	16
15	160 M	2950	5.0	IE3	92.1	92.0	90.6	0.88	26	3.0	7.4	3.5	1LE7503-1DA3	-	122	0.1938	16
18.5	160 L	2940	6.1	IE3	92.4	92.4	91.6	0.89	31	2.9	7.4	3.1	1LE7503-1DA4	-	128	0.2292	16
22	180 M	2940	7.3	IE3	92.9	92.9	91.9	0.87	38	3.0	7.3	3.2	1LE7503-1EA2	-	164	0.3164	16
30	200 L	2963	9.9	IE3	93.5	93.5	92.5	0.83	54	2.5	7.0	3.3	1LE7503-2AA4	-	230	0.5063	16
37	200 L	2960	12	IE3	93.8	93.5	92.0	0.85	65	2.5	7.3	3.3	1LE7503-2AA5	-	235	0.6256	16
45	225 M	2964	15	IE3	94.0	94.0	92.5	0.87	77	2.8	7.3	3.0	1LE7503-2BA2	-	313	0.9472	16
55	250 M	2970	18	IE3	94.6	94.6	94.4	0.88	92	2.1	6.5	2.8	1LE7503-2CA2	-	335	1.86	13
75	280 S	2972	25	IE3	94.9	94.9	94.5	0.87	126	2.2	6.5	2.8	1LE7503-2DA0	-	535	3.09	13
90	280 M	2977	29	IE3	95.1	95.1	94.5	0.88	150	2.6	7.7	3.0	1LE7503-2DA2	-	595	4.18	13
110	315 S	2982	36	IE3	95.4	95.4	95.2	0.90	178	2.4	7.0	2.8	1LE7503-3AA0	-	810	5.58	10
132	315 M	2982	43	IE3	95.6	95.6	95.4	0.91	211	2.5	7.3	2.6	1LE7503-3AA2	-	900	6.90	10
160	315 L	2982	52	IE3	95.8	95.8	95.6	0.91	255	2.5	7.2	2.7	1LE7503-3AA4	-	1180	9.52	10
200	315 L	2982	65	IE3	96.0	96.0	95.7	0.92	315	2.4	7.0	2.5	1LE7503-3AA5	-	1190	10.45	10
Voltages ²⁾		No. of poles	Frame size			Motor type			Version		Order code(s)						
50 Hz	240 VΔ/415 VY	2	71 M ... 90 S	1LE7503-0C ... -OE			Standard			2	3	-					
50 Hz	415 VΔ	2	90L ... 315 L	1LE7503-0E ... -3A			Standard			3	5	-					
For other voltages ¹⁾ and more information, code letters and descriptions, please refer Page 37																	
Types of construction			No. of poles	Frame size			Motor type			Version		Order code(s)					
Without flange	IM B3 ³⁾	2	71 M ... 315 L	1LE7503-0C ... -3A			Standard			A	-						
With flange	IM B5 ³⁾	2	71 M ... 315 M	1LE7503-0C ... -3A			With additional charge			F	-						
Further types of construction and more information, code letters and descriptions, please refer Page 37																	
Motor protection		Line	No. of poles	Frame size			Motor type			Version		Order code(s)					
Without		2	71 M ... 315 L	1LE7503-0C ... -3A			Standard			A	-						
Further motor protection and more information, code letters and descriptions, please refer Page 38																	
Terminal box position		No. of poles	Frame size			Motor type			Version		Order code(s)						
Terminal box at top		2	71 M ... 315 L	1LE7503-0C ... -3A			Standard			4	-						
Further terminal box positions and more information, code letters and descriptions, please refer Page 38																	

- 1) Operating values at rated output for 60 Hz are stored in the Drive Technology (DT) configurator.
- 2) Parallel supply lines are required in the case of connection to ≤ 240V. For frame size 315 with connection to ≤ 240V, due to the high current, a drilled, removable entry plate (Order code R52) or a larger terminal box (Order code R50) can be used. Order codes R52 and R50 alter the motor dimensions.

- 3) Types derived from IM B3 (IM B6/7/8, IM V6 and IM V5), from IM B5 (IM V3 and IM V1) and from IM B14 (IM V19 and IM V18) are possible, provided that no requirement exists for stamping of the type on the rating plate. The basic type IM B3, IM B5 or IM B14 is stamped as standard on the rating plate. If mounted in a different position, the position must be specified to ensure that the condensation drainage holes are positioned correctly.

SIMOTICS 1LE7 motors

Selection and ordering data

Selection and ordering data for 4pole IE3 efficiency class motors

Operating values at rated output													Cast-iron series						
P _{rated} , 50 Hz	Frame size	n _{rated} , 50 Hz Hz	T _{rated} , IE class	η _{rated} , 50 Hz, 4/4	η _{rated} , 50 Hz, 3/4	η _{rated} , 50 Hz, 2/4	cos φ _{rated}	I _{rated} , 50 Hz, 400 V 4/4	T _{LR} / T _{rated} , 50 Hz	I _{LR} / I _{rated} , 50 Hz	T _B / T _{rated} , 50 Hz	m _{IM B3}	GD ² of Rotor	Torque class					
kW	FS	rpm	kgfm	50 Hz %	%	%	A					kg	kgfm ²	CL					
<ul style="list-style-type: none"> Cooling: self-ventilated (IC411) Efficiency: IE3 High Efficiency, service factor (SF) 1.15 Insulation: thermal class 155 (temperature class F), IP55 degree of protection, utilization in accordance with thermal class 130 (temperature class B) 																			
4-pole: 1500 rpm at 50 Hz																			
0.25	71 M	1425	0.17	IE3	75.0	74.0	65.0	0.60	0.77	2.5	4.5	3.7	1LE7503-0CB2	-	12	0.0026	16		
0.37	71 M	1395	0.26	IE3	78.0	78.0	75.0	0.67	0.99	3.0	4.5	2.7	1LE7503-0CB3	-	13	0.0033	16		
0.55	80 M	1440	0.37	IE3	81.4	81.4	78.5	0.76	1.2	2.6	5.5	2.7	1LE7503-0DB2	-	17	0.0070	16		
0.75	80 M	1445	0.51	IE3	83.2	83.2	82.0	0.75	1.7	3.5	6.5	3.2	1LE7503-0DB3	-	21	0.0095	16		
1.1	90 S	1420	0.75	IE3	84.1	84.1	82.0	0.81	2.2	2.5	6.0	2.8	1LE7503-0EB0	-	24	0.0120	16		
1.5	90 L	1423	1	IE3	85.3	85.3	82.0	0.79	3.1	3.0	6.5	3.7	1LE7503-0EB4	-	28	0.0146	16		
2.2	100 L	1433	1.5	IE3	86.7	86.7	86.0	0.83	4.3	3.0	7.0	3.1	1LE7503-1AB4	-	36	0.0326	16		
3.7	112 M	1448	2.5	IE3	88.4	88.4	87.0	0.80	7.3	3.0	7.0	3.2	1LE7503-1BB2	-	45	0.0455	16		
5.5	132 S	1465	3.7	IE3	90.1	90.1	89.6	0.80	11	3.0	7.5	3.2	1LE7503-1CB0	-	69	0.0109	16		
7.5	132 M	1462	5	IE3	90.7	90.7	89.5	0.83	14	3.0	7.5	3.2	1LE7503-1CB2	-	79	0.1257	16		
11	160 M	1469	7.3	IE3	91.6	91.6	90.6	0.83	20	3.0	7.5	3.5	1LE7503-1DB2	-	120	0.2492	16		
15	160 L	1464	10	IE3	92.1	92.1	91.1	0.83	27	3.5	7.5	3.0	1LE7503-1DB4	-	124	0.2923	16		
18.5	180 M	1471	12	IE3	92.8	92.8	92.3	0.81	34	2.9	7.5	2.9	1LE7503-1EB2	-	162	0.4872	16		
22	180 L	1472	15	IE3	93.1	93.1	92.8	0.83	40	2.9	7.4	2.9	1LE7503-1EB4	-	183	0.5924	13		
30	200 L	1475	20	IE3	93.7	93.7	92.7	0.81	55	3.0	7.5	3.0	1LE7503-2AB5	-	239	0.8866	16		
37	225 S	1478	24	IE3	93.9	94.0	93.2	0.85	64	3.4	7.5	3.5	1LE7503-2BB0	-	315	2.0756	16		
45	225 M	1478	30	IE3	94.3	94.3	93.7	0.86	77	3.4	7.5	3.5	1LE7503-2BB2	-	330	2.3830	16		
55	250 M	1484	36	IE3	94.7	94.7	94.2	0.85	95	2.3	7.0	3.0	1LE7503-2CB2	-	430	3.62	13		
75	280 S	1484	49	IE3	95.1	95.1	94.0	0.83	132	2.4	7.2	3.2	1LE7503-2DB0	-	590	5.49	16		
90	280 M	1485	59	IE3	95.3	95.3	94.5	0.85	155	2.4	7.2	3.2	1LE7503-2DB2	-	675	6.47	13		
110	315 S	1488	72	IE3	95.5	95.4	94.3	0.86	186	2.6	7.3	2.9	1LE7503-3AB0	-	765	8.78	13		
132	315 M	1489	86	IE3	95.7	95.7	95.4	0.87	221	2.7	7.5	3.0	1LE7503-3AB2	-	935	10.75	13		
160	315 L	1489	105	IE3	95.9	95.9	95.7	0.87	267	3.2	7.7	3.3	1LE7503-3AB4	-	1028	13.75	16		
200	315 L	1490	131	IE3	96.2	96.2	95.8	0.87	332	3.0	7.5	3.0	1LE7503-3AB5	-	1220	17.42	16		
Voltages ²⁾				No. of poles	Frame size		Motor type		Version		Order code(s)								
50 Hz	240 VΔ/415 VY			4	71 M ... 90 L		1LE7503-0C ... -OE		Standard		2	3			-				
50 Hz	415 VΔ			4	100L ... 315 L		1LE7503-1A ... -3A		Standard		3	5			-				
For other voltages ¹⁾ and more information, code letters and descriptions, please refer Page 37																...			
Types of construction				No. of poles	Frame size		Motor type		Version		Order code(s)								
Without flange				4	71 M ... 315 L		1LE7503-0C ... -3A		Standard		A				-				
With flange				4	71 M ... 315 M		1LE7503-0C ... -3A		With additional charge		F				-				
Further types of construction and more information, code letters and descriptions, please refer Page 37																...			
Motor protection				Line	No. of poles	Frame size		Motor type		Version		Order code(s)							
Without				4	71 M ... 315 L		1LE7503-0C ... -3A		Standard		A				-				
Further motor protection and more information, code letters and descriptions, please refer Page 38																...			
Terminal box position				No. of poles	Frame size		Motor type		Version		Order code(s)								
Terminal box at top				4	71 M ... 315 L		1LE7503-0C ... -3A		Standard		4	-			...				
Further terminal box positions and more information, code letters and descriptions, please refer Page 38																...			

1) Operating values at rated output for 60Hz are stored in the Drive Technology (DT) configurator.

2) Parallel supply lines are required in the case of connection to ≤ 240V. For frame size 315 with connection to ≤ 240V, due to the high current, a drilled, removable entry plate (Order code R52) or a larger terminal box (Order code R50) can be used. Order codes R52 and R50 alter the motor dimensions.

3) Types derived from IM B3 (IM B6/7/8, IM V6 and IM V5), from IM B5 (IM V3 and IM V1) and from IM B14 (IM V19 and IM V18) are possible, provided that no requirement exists for stamping of the type on the rating plate. The basic type IM B3, IM B5 or IM B14 is stamped as standard on the rating plate. If mounted in a different position, the position must be specified to ensure that the condensation drainage holes are positioned correctly.

Selection and ordering data

Selection and ordering data for 6pole IE3 efficiency class motors

Operating values at rated output														Cast-iron series			
P _{rated} , 50 Hz	Frame size	n _{rated} , 50 Hz	T _{rated} , 50 Hz	IE	η _{rated} , 50 Hz, 4/4	η _{rated} , 50 Hz, 3/4	η _{rated} , 50 Hz, 2/4	cos φ _{rated} , 50 Hz	I _{rated} , 400 V	T _{L/R} / T _{rated} , 50 Hz	I _{LR} / I _{rated} , 50	T _B / T _{rated} , 50 Hz	Article No.	m _{IM B3}	GD ² of Rotor	Torque class	
kW	FS	rpm	kgfm	50 Hz	%	%	%	A					kg	kgfm ²	CL		
<ul style="list-style-type: none"> • Cooling: self-ventilated (IC411) • Efficiency: IE2 High Efficiency, service factor (SF) 1.15 • Insulation: thermal class 155 (temperature class F), IP55 degree of protection, utilization in accordance with thermal class 130 (temperature class B) 																	
6-pole: 1000 rpm at 50 Hz																	
0.18	71 M	885	0.2	IE3	65.1	65.1	64.0	0.70	0.55	2.0	2.5	2.3	1LE7503-0CC2		12	0.0028	13
0.25	71 M	910	0.27	IE3	70.0	70.0	66.0	0.64	0.78	2.5	3.0	2.7	1LE7503-0CC3		11	0.0036	16
0.37	80 M	945	0.38	IE3	74.5	74.5	72.0	0.63	1.1	2.5	4.0	2.6	1LE7503-0DC2		17	0.0072	16
0.55	80 M	935	0.57	IE3	77.2	77.2	73.0	0.68	1.5	2.5	4.0	2.6	1LE7503-0DC3		21	0.0103	16
0.75	90 S	940	0.78	IE3	80.3	80.3	78.0	0.71	1.8	2.0	4.5	2.6	1LE7503-0EC0		24	0.0124	13
1.1	90 L	945	1.1	IE3	81.5	81.5	80.0	0.71	2.6	2.0	4.5	2.5	1LE7503-0EC4		30	0.0171	10
1.5	100 L	945	1.5	IE3	82.5	82.5	82.0	0.73	3.5	2.0	5.0	2.4	1LE7503-1AC4		33	0.0310	10
2.2	112 M	955	2.2	IE3	84.3	84.3	81.0	0.67	5.4	2.8	6.0	2.8	1LE7503-1BC2		44	0.0432	13
3.7	132 S	965	3.7	IE3	86.5	86.5	85.0	0.71	8.4	2.5	6.0	2.6	1LE7503-1CC1		66	0.0927	10
5.5	132 M	968	5.5	IE3	88.0	88.0	86.0	0.70	12	3.0	6.6	3.0	1LE7503-1CC3		79	0.1257	13
7.5	160 M	979	7.5	IE3	89.4	89.4	88.4	0.76	15	3.2	5.6	3.0	1LE7503-1DC2		121	0.4559	16
11	160 L	979	11	IE3	90.3	90.3	87.7	0.75	23	3.2	5.8	3.0	1LE7503-1DC4		127	0.6319	16
15	180 L	978	15	IE3	91.4	91.4	90.4	0.73	31	2.8	6.3	3.0	1LE7503-1EC4		220	0.7844	16
18.5	200 L	980	18	IE3	91.9	91.9	90.9	0.77	36	3.5	7.0	3.0	1LE7503-2AC4		238	1.1224	16
22	200 L	980	22	IE3	92.3	92.3	91.4	0.79	42	3.5	7.0	3.0	1LE7503-2AC5		240	1.3635	16
30	225 M	985	30	IE3	93.1	93.1	92.1	0.8	56	3.4	7.5	3.5	1LE7503-2BC2		310	2.7662	16
37	250 M	984	37	IE3	93.5	93.5	93.3	0.84	66	2.5	7.3	3.1	1LE7503-2CC2		410	4.35	16
45	280 S	988	44	IE3	93.8	93.8	93.8	0.82	81	2.7	7.3	3.0	1LE7503-2DC0		555	5.13	16
55	280 M	988	54	IE3	94.2	94.2	94.2	0.84	97	3.0	7.5	3.0	1LE7503-2DC2		560	6.35	16
75	315 S	991	74	IE3	94.8	94.8	94.5	0.82	134	3.1	7.1	3.1	1LE7503-3AC0		760	10.42	16
90	315 M	990	89	IE3	95.0	95.0	94.7	0.84	157	2.6	7.0	2.9	1LE7503-3AC2		850	12.37	16
110	315 L	991	108	IE3	95.3	95.3	95.1	0.85	189	3.0	7.5	3.2	1LE7503-3AC4		1020	16.78	16
132	315 L	990	130	IE3	95.5	95.5	95.1	0.86	224	3.0	7.5	3.3	1LE7503-3AC5		1050	18.59	16

Voltages ²⁾		No. of poles	Frame size	Motor type	Version	Order code(s)		
50 Hz	240 VΔ/415 VY	6	71 M ... 100 L	1LE7503-0C ... -1A	Standard			-
50 Hz	415 VΔ	6	112 M ... 315 L	1LE7503-1B ... -3A	Standard			-
For other voltages ¹⁾ and more information, code letters and descriptions, please refer Page 37								
Types of construction		No. of poles	Frame size	Motor type	Version	Order code(s)		
Without flange	IM B3 ³⁾	6	71 M ... 315 L	1LE7503-0C ... -3A	Standard			-
With flange	IM B5 ³⁾	6	71 M ... 315 M	1LE7503-0C ... -3A	With additional charge			-
Further types of construction and more information, code letters and descriptions, please refer Page 37								
Motor protection	Line	No. of poles	Frame size	Motor type	Version	Order code(s)		
Without		6	71 M ... 315 L	1LE7503-0C ... -3A	Standard			-
Further motor protection and more information, code letters and descriptions, please refer Page 38								
Terminal box position		No. of poles	Frame size	Motor type	Version	Order code(s)		
Terminal box at top		6	71 M ... 315 L	1LE7503-0C ... -3A	Standard			-
Further terminal box positions and more information, code letters and descriptions, please refer Page 38								

- Operating values at rated output for 60Hz are stored in the Drive Technology (DT) configurator.
- Parallel supply lines are required in the case of connection to ≤ 240V. For frame size 315 with connection to ≤ 240V, due to the high current, a drilled, removable entry plate (Order code R52) or a larger terminal box (Order code R50) can be used. Order codes R52 and R50 alter the motor dimensions.

- Types derived from IM B3 (IM B6/7/8, IM V6 and IM V5), from IM B5 (IM V3 and IM V1) and from IM B14 (IM V19 and IM V18) are possible, provided that no requirement exists for stamping of the type on the rating plate. The basic type IM B3, IM B5 or IM B14 is stamped as standard on the rating plate. If mounted in a different position, the position must be specified to ensure that the condensation drainage holes are positioned correctly.

SIMOTICS 1LE7 motors

Selection and ordering data

Selection and ordering data for 8pole IE3 efficiency class motors

Operating values at rated output											Cast-iron series				
P _{rated} , 50 Hz	Frame size	n _{rated} , 50 Hz	T _{rated} , 50 Hz	IE class	η _{rated} , 50 Hz, 4/4	η _{rated} , 50 Hz, 3/4	η _{rated} , 50 Hz,	cos φ _{rated} ,	I _{rated} , 50 Hz,	T _{LR} / T _{rated} ,	I _{LR} / I _{rated} ,	T _B / T _{rated} ,	m _{IM B3}	GD ² of Rotor	Torque class
kW	FS	rpm	kgfm	50 Hz	%	%	%		A				kg	kgfm ²	CL
• Cooling: self-ventilated (IC411)															
• Efficiency: IE2 High Efficiency, service factor (SF) 1.15															
• Insulation: thermal class 155 (temperature class F), IP55 degree of protection, utilization in accordance with thermal class 130 (temperature class B)															
8-pole: 750 rpm at 50 Hz															
0.12	71	672	0.17	IE3	50.7	50.7	47.7	0.58	0.57	2.2	3.6	2.5	1LE7503-0CD3	■ - ■ ■ ■ ■ ■	12 0.0039 13
0.18	80	690	0.25	IE3	58.7	58.7	54.0	0.57	0.75	1.7	3.6	2.0	1LE7503-0DD2	■ - ■ ■ ■ ■ ■	17 0.0074 10
0.25	80	690	0.35	IE3	64.1	64.1	60.0	0.57	0.95	1.7	3.5	2.0	1LE7503-0DD3	■ - ■ ■ ■ ■ ■	25 0.0106 10
0.37	90 S	715	0.50	IE3	69.3	67.0	60.0	0.55	1.4	2.0	4.0	2.4	1LE7503-0ED0	■ - ■ ■ ■ ■ ■	27 0.0137 10
0.55	90 L	710	0.75	IE3	73.0	71.5	66.0	0.55	1.9	2.0	4.0	2.4	1LE7503-0ED4	■ - ■ ■ ■ ■ ■	29 0.0188 10
0.75	100 L	705	1.0	IE3	75.0	71.0	66.0	0.59	2.4	1.7	4.0	2.2	1LE7503-1AD4	■ - ■ ■ ■ ■ ■	32 0.0252 13
1.1	100 L	705	1.5	IE3	77.7	74.7	70.7	0.60	3.3	1.5	4.0	2.0	1LE7503-1AD5	■ - ■ ■ ■ ■ ■	37 0.0402 10
1.5	112 M	704	2.1	IE3	79.7	79.7	75.7	0.64	4.1	1.7	4.0	2.3	1LE7503-1BD2	■ - ■ ■ ■ ■ ■	50 0.0543 13
2.2	132 S	720	3.0	IE3	81.9	81.9	81.9	0.61	6.1	1.5	4.5	2.3	1LE7503-1CD0	■ - ■ ■ ■ ■ ■	60 0.0915 10
3.7	160 M	726	5.0	IE3	84.5	84.5	84.0	0.63	9.7	2.1	5.0	2.4	1LE7503-1DD2	■ - ■ ■ ■ ■ ■	120 0.3600 13
5.5	160 M	726	7.4	IE3	86.2	86.2	85.0	0.64	14	2.0	5.0	2.3	1LE7503-1DD3	■ - ■ ■ ■ ■ ■	137 0.4280 10
7.5	160 L	724	10	IE3	87.3	86.0	85.0	0.63	19	2.0	5.0	2.3	1LE7503-1DD4	■ - ■ ■ ■ ■ ■	140 0.4960 10
11	180 L	724	15	IE3	88.6	88.6	88.0	0.73	24	2.3	5.1	2.4	1LE7503-1ED4	■ - ■ ■ ■ ■ ■	165 1.0680 13
15	200 L	726	20	IE3	89.6	89.6	89.0	0.73	32	3.0	6.5	3.5	1LE7503-2AD5	■ - ■ ■ ■ ■ ■	235 1.6800 16
18.5	225 S	732	25	IE3	90.1	90.0	90.0	0.74	39	2.6	6.0	2.7	1LE7503-2BD0	■ - ■ ■ ■ ■ ■	325 2.0000 16
22	225 M	732	29	IE3	90.6	90.6	90.0	0.75	45	2.7	6.0	2.8	1LE7503-2BD2	■ - ■ ■ ■ ■ ■	395 2.7632 16
30	250 M	734	40	IE3	91.7	92.0	91.7	0.77	59	2.4	6.8	3.0	1LE7503-2CD2	■ - ■ ■ ■ ■ ■	380 3.68 16
37	280 S	736	49	IE3	92.2	92.2	92.2	0.79	71	2.1	6.0	2.4	1LE7503-2DD0	■ - ■ ■ ■ ■ ■	565 4.74 13
45	280 M	737	59	IE3	92.6	92.6	92.8	0.79	86	2.3	6.0	2.5	1LE7503-2DD2	■ - ■ ■ ■ ■ ■	570 5.83 16
55	315 S	740	72	IE3	92.8	92.8	92.5	0.79	104	2.0	5.5	2.6	1LE7503-3AD0	■ - ■ ■ ■ ■ ■	690 8.38 13
75	315 M	740	99	IE3	93.4	93.4	93.4	0.80	140	2.3	6.8	3.1	1LE7503-3AD2	■ - ■ ■ ■ ■ ■	730 13.44 16
90	315 L	739	119	IE3	93.7	93.7	93.7	0.80	167	2.2	6.0	2.8	1LE7503-3AD4	■ - ■ ■ ■ ■ ■	900 13.44 13
110	315 L	740	145	IE3	94.0	94.0	94.0	0.79	206	2.5	6.0	3.1	1LE7503-3AD5	■ - ■ ■ ■ ■ ■	1100 16.95 16

Voltages ²⁾		No. of poles	Frame size	Motor type	Version			Order code(s)	
50 Hz 240 VΔ/415 VY		8	71 M ... 112M	1LE7503-0C ... -1B	Standard	2	3		-
50 Hz 415 VΔ		8	132S ... 315 L	1LE7503-1C ... -3A	Standard	3	5		-
For other voltages ¹⁾ and more information, code letters and descriptions, please refer Page 37									
Types of construction		No. of poles	Frame size	Motor type	Version			Order code(s)	
Without flange		IM B3 ³⁾	8	71 M ... 315 L	1LE7503-0C ... -3A	Standard	A		-
With flange		IM B5 ³⁾	8	71 M ... 315 M	1LE7503-0C ... -3A	With additional charge	F		-
Further types of construction and more information, code letters and descriptions, please refer Page 37									
Motor protection		Line	No. of poles	Frame size	Motor type	Version			Order code(s)
Without		8	71 M ... 315 L	1LE7503-0C ... -3A	Standard	A			-
Further motor protection and more information, code letters and descriptions, please refer Page 38									
Terminal box position		No. of poles	Frame size	Motor type	Version			Order code(s)	
Terminal box at top		8	71 M ... 315 L	1LE7503-0C ... -3A	Standard	4	-		
Further terminal box positions and more information, code letters and descriptions, please refer Page 38									

- 1) Operating values at rated output for 60Hz are stored in the Drive Technology (DT) configurator.
- 2) Parallel supply lines are required in the case of connection to ≤ 240V. For frame size 315 with connection to ≤ 240V, due to the high current, a drilled, removable entry plate (Order code R52) or a larger terminal box (Order code R50) can be used. Order codes R52 and R50 alter the motor dimensions.

- 3) Types derived from IM B3 (IM B6/7/8, IM V6 and IM V5), from IM B5 (IM V3 and IM V1) and from IM B14 (IM V19 and IM V18) are possible, provided that no requirement exists for stamping of the type on the rating plate. The basic type IM B3, IM B5 or IM B14 is stamped as standard on the rating plate. If mounted in a different position, the position must be specified to ensure that the condensation drainage holes are positioned correctly.

Selection & ordering data

	Voltage code	Construction code	Winding Protection code	Terminal Box code	Frame size	71	80	90	100	112	132	160	180	200	225	250	280	315
MLFB Position	12th & 13th	14th	15th	16th														
1LE7503-□□□	■■□□□	□-□■□□	□-□□■□	□-□□□■														
Voltage																		
50Hz, 415VΔ#	3-5					□	□	□	□	□	□	□	□	□	□	□	□	□
50Hz, 240VΔ/415VY#	2-3					□	□	□	□	□	□	□	□	□	□	□	□	□
50Hz, 220VΔ	2-1					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
50Hz, 230VΔ	2-2					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
50Hz, 360VΔ®	9-0					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
50Hz, 380VΔ	3-3					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
50Hz, 400VΔ	3-4					on enquiry												
50Hz, 440VΔ®	9-0					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
50Hz, 460VΔ®	9-0					✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
50Hz, 480VΔ®	9-0					on enquiry												
50Hz, 500VΔ®	4-0																	
Voltage other than above &/or frequency other than 50Hz						Contact Sales office												
Type of Construction																		
	IMB3	A				□	□	□	□	□	□	□	□	□	□	□	□	□
	IMV5	C				O	O	O	O	O	O	O	O	O	O	O	O	O
	IMV6	D				O	O	O	O	O	O	O	O	O	O	O	O	O
	IMV1	G				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	IMV3^	H				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	IMB5^	F				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	IMB14	K				✓	✓	✓	✓	✓	✓	✓	Not Available					
	IMV18	M				✓	✓	✓	✓	✓	✓	✓	Not Available					
	IMV19	L				✓	✓	✓	✓	✓	✓	✓	Not Available					
	IMB35	J				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	IMB34	N				✓	✓	✓	✓	✓	✓	✓	Not Available					
	IMV36^	Y				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	IMB6	T				O	O	O	O	O	O	O	O	O	O	O	O	O
	IMB7	U				O	O	O	O	O	O	O	O	O	O	O	O	O
	IMB8	V				O	O	O	O	O	O	O	O	O	O	O	O	O
	IMV15	W				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

SIMOTICS 1LE7 motors

Selection and ordering data

	MLFB: Z Code if 15th any	Frame size																						
		71	80	90	100	112	132	160	180	200	225	250	280	315										
Winding Protection																								
Without protection	A	<input type="checkbox"/>																						
3x PTC thermistors for tripping (Class F)	B	<input checked="" type="checkbox"/>																						
6x PTC thermistors for tripping (Class F)	B Q11	<input checked="" type="checkbox"/>																						
6x PTC thermistors - 3x for alarm and 3x for tripping (Class F)	C	<input checked="" type="checkbox"/>																						
3x PTC thermistors for tripping (Class B)	B Q90	<input checked="" type="checkbox"/>																						
6x PTC thermistors for tripping (Class B)	B Q11+Q90	<input checked="" type="checkbox"/>																						
6x PTC thermistors - 3x for alarm and 3x for tripping (Class B)	C Q90	<input checked="" type="checkbox"/>																						
3x PT100 resistance thermometers in stator winding - 2 wire	H	<input checked="" type="checkbox"/>																						
6x PT100 resistance thermometers in stator winding - 2 wire	J	On Enquiry				<input checked="" type="checkbox"/>																		
Embedded temperature sensor- PT1000	K	Not Available				<input checked="" type="checkbox"/>																		
2x Embedded temperature sensor- PT1000	L	Not Available				<input checked="" type="checkbox"/>																		
3x PT100 resistance thermometers in stator winding - 3 wire	Z Q1B	Not Available				<input checked="" type="checkbox"/>																		
6x PT100 resistance thermometers in stator winding - 3 wire	Z Q2B	Not Available				<input checked="" type="checkbox"/>																		
12x PT100 resistance thermometers in stator winding - 3 wire	Z Q2B+Q66	Not Available																						
3x Bi-metallic sensors for trip operation (Thermostats)	Z Q3A	<input checked="" type="checkbox"/>																						
6x Bi-metallic sensors (3x for alarm, 3x for tripping) (Thermostats)	Z Q9A	On Enquiry																						
3x Bi-metallic sensors (opener) for trip operation (Thermostats) - additional	Q31 ²	Not Available				On Enquiry																		
6x Bi-metallic sensors (opener) for trip operation (Thermostats) - additional	Q32 ²	<input checked="" type="checkbox"/>	Not Available		On Enquiry																			
3x PT100 resistance thermometers in stator winding - 3 wire (additional)	Q65 ²	Not Available				On Enquiry																		
6x PT100 resistance thermometers in stator winding - 3 wire (additional) - [In addition to Q2B]	Q66 ²	On Enquiry																						

Terminal Box Position

Terminal Box on TOP	4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Mains Terminal box on RHS as viewed from DE	5	Not Available		<input checked="" type="checkbox"/>										
Mains Terminal box on LHS as viewed from DE	6	Not Available		<input checked="" type="checkbox"/>										

Standard Version

Without additional charges.

- At an extra price

Note:

As an industry standard, ratings ≤1.5kW are star connected and ratings >1.5kW are delta connected.

@ Voltage code 9-0 in position 12-13 requires additional order code M1Y along with plain text mentioning voltage & frequency.

1 IMV35 shall be punched when used with B59

2 Can not be offered when MLFB 15th digit is "A"

^ Except frame 315L

Selection and ordering data

Price Add-ons for 1LE7

Options (Non-standard features / Accessories) - Simotics																	
Sr. No.	Description	Z- Code	Remarks	Note	Frame size												
					71	80	90	100	112	132	160	180	200	225			
					0C	0D	0E	1A	1B	1C	1D	1E	2A	2B	2C	2D	3A
1	2x PT100 screw-in resistance thermometers (2 wire) for rolling-contact bearings [Simplex 2 wire type]	Q72		Not Applicable							✓	✓	✓	✓	✓	✓	✓
2	2x PT100 screw-in resistance thermometers (3 wire) for rolling-contact bearings [Simplex 3 wire type]	Q67		Not Applicable							✓	✓	✓	✓	✓	✓	✓
3	2x PT100 double screw-in resistance thermometers (3 wire) for rolling-contact bearings	Q68		Not Applicable							✓	✓	✓	✓	✓	✓	✓
Connection and Connection Box																	
4	External Grounding (Earthing) Terminal on motor feet	H04			O	O	O	O	O	O	O	O	O	O	O	O	O
5	Second external grounding (earthing) terminal on motor feet	H70			O	O	O	O	O	O	O	O	O	O	O	O	O
6	Rotation of the mains terminal box through 90°, entry from DE	R10			O	O	O	O	O	O	O	O	O	O	O	O	O
7	Rotation of the mains terminal box through 90°, entry from NDE	R11			O	O	O	O	O	O	O	O	O	O	O	O	O
8	Rotation of mains terminal box through 180°	R12			O	O	O	O	O	O	O	O	O	O	O	O	O
9	6x flying leads, 0.5 m long	R22			✓	✓	✓	✓	✓	✓	✓	✓	✓	Not Available			
10	6x flying leads, 1.5 m long	R23			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
11	6x flying leads, 3 m long	R24			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
12	Reducer	R30			Not Available				✓	✓	✓	✓	✓	✓	✓	✓	✓
13	Removable cable entry plate	R52			Not Available						✓	✓	✓	✓	✓	✓	✓
14	Undrilled removable entry plate	R53			Not Available						✓	✓	✓	✓	✓	✓	✓
15	Next larger mains terminal box	R50			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
16	Cable end box extension	R59	Possible only in combination with R52/ R53 for frame size upto 280; R50/R52/R53 in frame size 315		Not Available						✓	✓	✓	✓	✓	✓	✓
17	1x Cast-iron auxiliary terminal box (Small)	R62			Not Available				✓	✓	✓	✓	✓	✓	✓	✓	✓
18	1x Cast-iron auxiliary terminal box (Large)	R63			Not Available						✓	✓	✓	✓	✓	✓	✓
19	2x Cast-iron auxiliary terminal box (Small)	R67			Not Available						✓	✓	✓	✓	✓	✓	✓
20	2x Cast-iron auxiliary terminal box (Large)	R68			Not Available									✓	✓	✓	
21	Mains Terminal box - Cast Iron (where AI is a standard)	R64			✓	✓	✓	✓	✓	✓	✓	0	0	0	0	0	0
22	Non-standard threaded through hole (NPT or G thread)	Y61			O	O	O	O	O	O	O	O	O	O	O	O	O
Winding & Insulation																	
23	Ambient temperature 55°C (F utilised to B limits)	N07	Only with 1LE76/1LE77		O	O	O	O	O	O	O	O	O	O	O	O	O
24	Temperature class 155 (F), utilized acc. to 155 (F), with service factor (SF)	N01			O	O	O	O	O	O	O	O	O	O	O	O	O
25	Temperature class 155 (F), utilized acc. to 155 (F), with increased output	N02			O	O	O	O	O	O	O	O	O	O	O	O	O
26	Temperature class 155 (F), utilized acc. to 155 (F), with increased ambient temperature	N03			O	O	O	O	O	O	O	O	O	O	O	O	O

Notes:

- 1 Not available for IC416 cooling.
 # Only when configurable in DT-C
 * Prior quotation from works necessary
 □ Standard Version

- O Without additional charges.
 ✓ At an extra price
 + Inverter suitable winding >500V :- 6th position in MLFB should be with digit

SIMOTICS 1LE7 motors

Selection and ordering data

Options (Non-standard features / Accessories) - Simotics																				
Sr. No.	Description	Z-Code	Remarks	Note	Frame size															
					71	80	90	100	112	132	160	180	200	225	250	280	315			
Winding & Insulation (continued)																				
27	Temperature class 180 (H) at rated output and max. CT 60 °C	N11			On Enquiry															
28	Temperature class 180 (H) at rated output	N10			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Environmental protection																				
29	Anti-corrosive treatment for winding overhang	N22			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
30	Increased air humidity / temperature (30g to 60g of water /m³ of air)	N30			On Enquiry				Not Available				✓	✓	✓	✓				
31	Increased air humidity / temperature (60g to 100g of water /m³ of air)	N31			On Enquiry				Not Available				✓	✓	✓	✓				
32	Sea worthy packaging	B12			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Motors for Converter Fed Operation																				
33	Inverter suitable winding		For frame size 71-225 (Inverter output voltage ≤480V) For frame size 250-315 (Inverter output voltage ≤500V)	O O O O O O O O O O O O O O O O	O	O	O	O	O	O	O	O	O	O	O	O	O			
34	Inverter suitable winding		For frame size 71-225 (Inverter output voltage>480 and ≤690V)+ For frame size 250-315 (Inverter output voltage>500 and ≤690V)+	On Enquiry												✓	✓	✓		
35	Insulated Bearing at NDE	L53			Not Available												✓	✓	✓	✓
36	Mounting of Separately Driven Fan	F70			Not Available												✓	✓	✓	✓
37	Separately driven fan with non-standard voltage and/or frequency	Y81	To be ordered alongwith F70	Not Available												✓	✓	✓	✓	✓
Heating & Ventilation																				
38	Fan cover for textile industry (Clean Flow Fan Cowl includes Canopy)	F75		NA	✓	✓	✓	✓	✓	✓	✓	✓	Not Available							
39	Metal external fan (Metal Fan [no AL])	F76	1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
40	Without external fan and without fan cover	F90	1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
41	Fan cover with Canopy	H00		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
42	Anti-condensation heaters for 230 V	Q02		NA NA	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
43	Anti-condensation heaters for 115 V	Q03		NA NA	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
44	Anti-condensation heaters for 240 V	Q07		NA NA	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
45	Anti-condensation heaters for 120 V	Q08		NA NA	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Colour & Paint Finish																				
Paint Shades (If no paint shade is selected, then RAL 7030 is the standard)																				
46	Standard Paint Shade - RAL 7030			O O O O O O O O O O O O O O O O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	
47	Standard RAL paint shades other than RAL7030	Y53	Specify RAL shade code in plain text	✓ ✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
48	Special RAL paint shades or shades as per IS:5	Y56	Specify RAL/IS shade code in plain text	✓ ✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Notes: 1. Y53 or Y56 (only one at a time) can be combined with any of the paint finishes indicated in 43 to 47. Below. Just add the appropriate price from 41 or 42.
 2. Some paint shades both from Y53 or Y56 are only possible with S07. Please consult sales offices for the same.

Notes:

- 1 Not available for IC416 cooling.
- # Only when configurable in DT-C
- * Prior quotation from works necessary
- Standard Version

O Without additional charges.

✓ At an extra price

+ Inverter suitable winding >500V :- 6th position in MLFB should be with digit

Selection and ordering data

Options (Non-standard features / Accessories) - Simotics																			
Sr. No.	Description	Z- Code	Remarks	Note	Frame size	71	80	90	100	112	132	160	180	200	225	250	280	315	
Colour & Paint Finish (continued)																			
Paint Finish (If no paint finish is selected, Acrylic based paint finish is standard)																			
49			60µ standard.		O	O	O	O	O	O	O	O	O	O	O	O	O		
50	Epoxy based Paint - Standard paint thickness	S07+Y57(90)	DFT 90µ		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
51	Epoxy based Paint - Special paint thickness DFT 120µ	S07+Y57(120)	DFT 120µ [Y57 (120)]		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
52	Epoxy based Paint - Special paint thickness DFT 180µ	S07+Y57(180)	DFT 180µ [Y57 (180)]		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
53	Special finish for use onshore sea air resistant	S03+S06+Y57+H07	180µ [Y57(180)] 240µ [Y57(240)]		On Enquiry														
54	Special paint thickness for offshore use	S04+S06+Y57+H07	295µ [Y57(295)]		On Enquiry														
Notes:																			
1. Paint thickness needs to be specified by means of plain text irrespective of whether it is standard or special.																			
2. S06 - Final Coat Polyurethane is mandatory with S03 or S04. S06 is not possible to be ordered separately.																			
3. H07 - Non-rusting external hardware is mandatory with S03 or S04. H07 can be separately order even without S03 or S04. The separate price for H07 is available against the option at another location.																			
55	Motor supplied unpainted - only with (Red-oxide) Primer	S01			O	O	O	O	O	O	O	O	O	O	O	O	O		
Encoders																			
56	Kubler Sendix 5020 HTL Rotary Pulse encoder-10	G11			✓	✓	✓		On Enquiry		NA	NA	NA	NA	NA	NA	NA		
57	Kubler Sendix 5020 TTL Rotary Pulse encoder-10	G12			✓	✓	✓		On Enquiry		NA	NA	NA	NA	NA	NA	NA		
58	LL 861 900 220 rotary pulse encoder	G04			Not Available		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
59	HOG 9 DN 1024 I rotary pulse encoder	G05			Not Available		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
60	HOG 10 D 1024 I rotary pulse encoder	G06			Not Available		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
61	Baumer Thalheim make ITD 40 A4 Y126 1024 encoder	G17			Not Available		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
62	HOG 86 TP6 DN 1024 I encoder	G19			Not Available		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
63	Prepared for mounting Baumer Thalheim make ITD 40 A4 Y126 1024 - encoder	G44			Not Available		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
64	Prepared for mounting cylindrical shaft encoder - 16dia x 52	G45			Not Available		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
65	Prepared for any make Cylindrical Hollow Shaft Encoder	Y71			On Enquiry														
66	Mounting of rotary pulse encoder HOG 10 DN 1024 I + FSL, (speed rpm), connection box protection against moisture	Y74			Not Available						On Enquiry								
67	Mounting of rotary pulse encoder HOG 10 DN 1024 I + FSL, (speed rpm), connection box protection against dust	Y76			Not Available						On Enquiry								
68	Mounting of rotary pulse encoder HOG 10 DN 1024 I + E SL 93, (speed rpm), connection box protection against moisture	Y79			Not Available						On Enquiry								
Brake motors																			
69	Mounting of brake	F07			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	NA	NA	
70	Brake supply voltage 24 V DC	F10			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	NA	NA
71	Brake supply voltage 230 V AC, 50/60 Hz	F11			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	NA	NA
72	Brake supply voltage 400 V AC, 50/60 Hz	F12			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	NA	NA
73	Brake supply voltage 240 V AC, 50/60 Hz	F13			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	NA	NA
74	Brake supply voltage 415 V AC, 50/60 Hz	F14			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	NA	NA	NA

Notes:

- 1 Not available for IC416 cooling.
 # Only when configurable in DT-C
 * Prior quotation from works necessary
 □ Standard Version

- O Without additional charges.
 ✓ At an extra price
 + Inverter suitable winding >500V :- 6th position in MLFB should be with digit

SIMOTICS 1LE7 motors

Selection and ordering data

Options (Non-standard features / Accessories) - Simotics																		
Sr. No.	Description	Z-Code	Remarks	Note	Frame size													
					71	80	90	100	112	132	160	180	200	225	250	280	315	
Brake motors (continued)																		
75	Mechanical manual brake release with lever (cannot be locked)	F50			O	O	O	O	O	O	O	O	O	O	NA	NA	NA	
Mechanical Design & Degrees of Protection																		
76	Vibration proof version	H02			On Enquiry										✓	✓	✓	
77	Condensation drainage holes - sealed with a plug	H03			✓	✓	✓	O	O	O	O	O	O	O	O	O	O	
78	Stainless steel fasteners (external)	H07			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
79	Mains Terminal box on NDE	H08			Not Available										On Enquiry			
80	IP65 degree of protection	H20			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
81	IP56 degree of protection (non-heavy-sea)	H22			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Bearing & Lubrication																		
82	Measuring nipple for SPM shock pulse measurement for bearing inspection	Q01			Not Available		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
83	Locating bearing, DE	L20			On Enquiry													
84	Bearing design for increased cantilever forces	L22	NU (Cylindrical Roller) Brgs		Not Available					✓	✓	✓	✓	✓	✓	✓	✓	
85	Regreasing device	L23			Not Available					□	□	□	□	□	□	□	□	
86	Bearings reinforced at both ends for DE and NDE, bearing size 63	L25	Only where 62 series is a standard		✓	✓	✓	✓	✓	✓	□	□	□	□	□	□	□	
87	C4 clearance bearing at DE & NDE	L31			Not Available					✓	✓	✓	✓	✓	✓	✓	✓	
88	SKF bearing at DE & NDE	L32			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	On Enquiry			
89	Double Sealed (ZZ) bearings (permanently lubricated) - only for ball bearings at DE & NDE	L33			Not Available					✓	✓	✓	✓	✓	✓	✓	✓	
Balance & Vibration Quality																		
90	Vibration Severity Level A				O	O	O	O	O	O	O	O	O	O	O	O	O	
91	Vibration Severity Level B	L00			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
92	Balancing without key	L01			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
93	Full key balancing	L02			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Shaft & Rotor																		
94	Standard Double Shaft Extension (SDSE)	L05		1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
95	Shaft material - Stainless steel	L06			✓	✓	✓	✓	✓	✓	✓	On Enquiry						
96	Non-standard cylindrical shaft extension - DE	Y58	*		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
97	Non-standard cylindrical shaft extension - NDE	Y59		*1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
98	Special shaft steel:__	Y60			On Enquiry													
99	Tapered shaft extension DE	Y62			On Enquiry													
100	Tapered shaft extension NDE	Y63		*1	On Enquiry													
101	Oil Tight shaft	H23	Only for Flange motors and gear box assembly		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	On Enquiry	
Rating Plate & Extra Rating Plate																		
102	Stainless steel nameplate				O	O	O	O	O	O	O	O	O	O	O	O	O	
103	Direction indicating arrow - Clockwise	L10			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
104	Direction indicating arrow - Counter-clockwise	L11			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
105	Extra rating plate with deviating rating plate data	Y80			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
106	Extra rating plate with identification code - Auxilliary nameplate	Y82			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
107	Nameplate in accordance with IEC	B59		2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
108	Additional information on rating plate and on package label (max. of 20 characters)	Y84			✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

Notes:

- 1 Not available for IC416 cooling.
- # Only when configurable in DT-C
- * Prior quotation from works necessary
- Standard Version

O Without additional charges.

✓ At an extra price

+ Inverter suitable winding >500V : 6th position in MLFB should be with digit

Selection and ordering data

Sr. No.	Description	Z- Code	Remarks	Note	Frame size	71	80	90	100	112	132	160	180	200	225	250	280	315
Rating Plate & Extra Rating Plate (continued)																		
109	Second rating plate, supplied loose	M10				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Testing Charges																		
110	Witnessing of Routine Test as per IS15999	B65				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
111	Visual Inspection (Includes Dimension Measurement and paint shade and thickness)	B66				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
112	Type test as per IS 15999	B83				✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
113	Noise measurement without spectrum analysis with acceptance	B70				On Enquiry												
114	Noise measurement with spectrum analysis with acceptance	B72				On Enquiry												

Notes:


- 1 Not available for IC416 cooling.
 # Only when configurable in DT-C
 * Prior quotation from works necessary
 Standard Version

- Without additional charges.
 At an extra price
 Inverter suitable winding >500V :- 6th position in MLFB should be with digit

SIMOTICS 1LE7 motors

Dimensional drawings

1LE7 (Frame size 71-132) IMB3-IE2

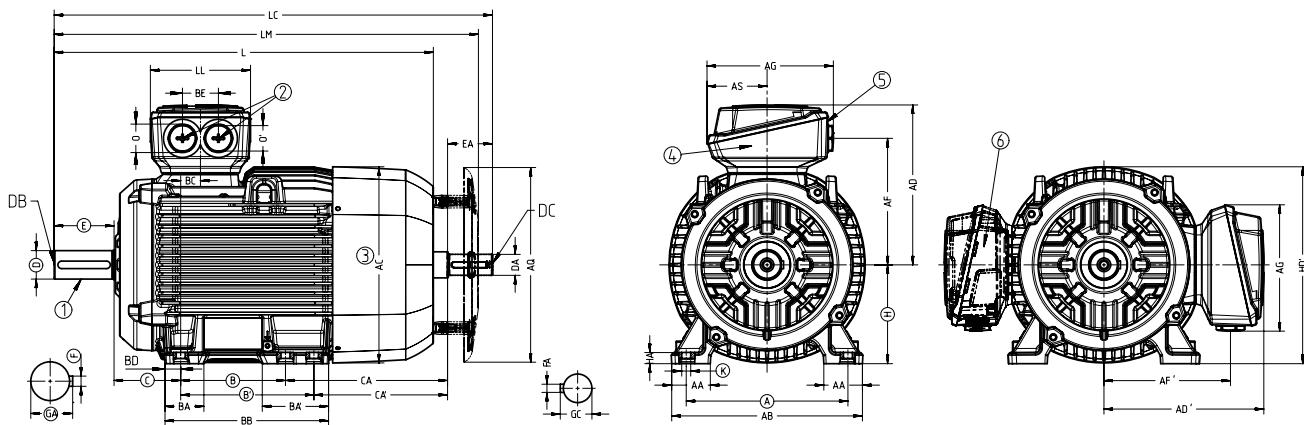

Frame size	No. of poles	Shaft extension																																					
		A	AA	AB	AC	AD	AD'	AG	AS	AQ	B	B'	BA	BA'	BB	BC	BD	BE	C	CA	CA'	H	HA	AF	AF'	HD'	K	L	LM	LL	O	O'	Drive end	Non-drive end					
71M	2,4,6	112	30.5	132	145	149	NA	126	62	125	90	NA	NA	NA	NA	106	21	8	36	45	83	NA	71	7	112	NA	NA	7.5	240	272	278	102	M16	M25	14	M5	30	5	16
80M	2,4,6	125	30.5	150	162	159	NA	126	62	155	100	NA	NA	NA	NA	118	22.5	9	36	50	112.5	NA	80	8	122	NA	NA	10	292	328	342.5	19	M6	40	6	21.5			
90S⑧	2,4,6	140	30.5	165	180	164	NA	126	62	155	100	-	NA	NA	143	24.5	9	36	56	159	-	90	11	127	NA	NA	10	347	383	405	24	M8	50	8	27				
90L⑧	4⑦	- 125 - 134																																					
90L⑧	2,6	- 174 - 387 423 445																																					
100L	2	160	42	196	217	193	193	163	80.5	195	140	NA	48	48	176	37.5	18	48	63	176	NA	100	12	147	147	202	12	425	465	489	134	M32	M32	28	M10	60	8	31	
		4,6 - 141 - 390 430 454																																					
112M	4,6	190	46	226	239	196	196	163	80.5	195	140	NA	48	48	176	30	18	48	70	155	NA	112	12	150	150	226	12	409	449	475	28	M10	60	8	31				
132S	2,4,6	216	53	256	281	215	215	163	80.5	260	140	-	52	89	218	26.5	20	48	89	166.5	-	132	15	169	169	266	12	458	518	535.5	38	M12	80	10	41				
132M	2,4,6	- 178 - 508 568 585.5																																					

① Shaft extension as per IEC:60072 / IS:1231

② 2 Nos. Conduit Entry as per IEC:60423 / IS:14763

③ Measured over bolt heads

④ Terminal box can be rotated in steps of 90°

⑤ Cable End box of Non Detachable type

⑥ For Terminal Box on left, view is "mirror image"

⑦ For 1.5 Kw output

⑧ Eye bolt provided as lifting arrangement


Definitive Dimensions:

A,B,B',C,H,K,D,E,F,GA are binding dimensions for all standard motors.

All other dimensions are subject to change.

For valid dimensions, please contact Regional office in your region.

1LE7 (Frame size 71-132) IMB5/V1-IE2

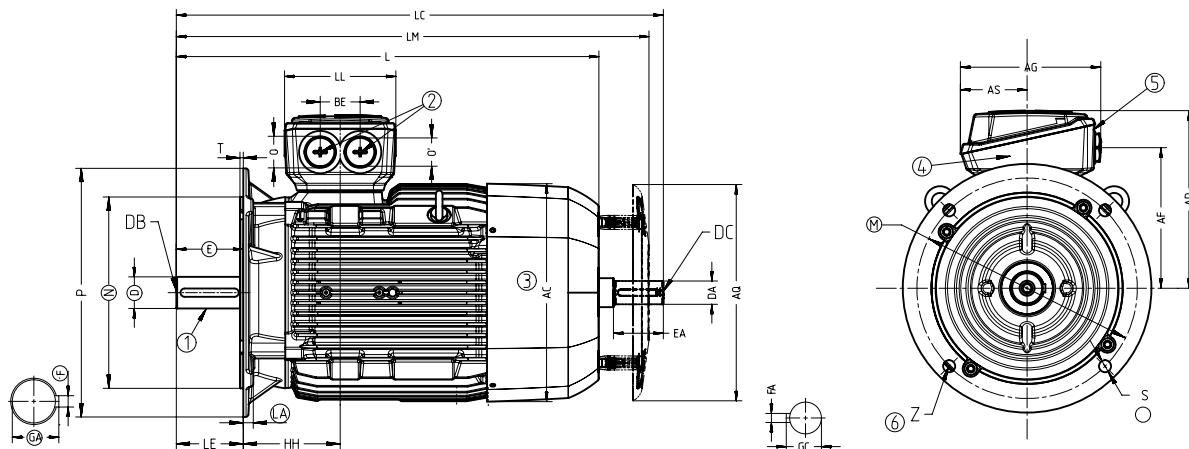

Frame size	No. of poles	Shaft extension														Flange																	
		AC	AD	AG	AS	AQ	LE	AF	BE	HH	L	LM	LC	LL	O	O'	Drive end	Non-drive end					⑦ Number	LA	M	N	P	S	T	Z			
71M	2,4,6	145	149	126	62	125	30	112	36	66	240	272	278	102	M16	M25	14	M5	30	5	16	M5	30	5	16	F130B	5	130	110	160	10	3.5	4
80M	2,4,6	162	159	126	62	155	40	122	36	72.5	292	328	342.5				19	M6	40	6	21.5	M6	40	6	21.5	F165B	10	165	130	200	12	3.5	4
90S	2,4,6	180	164	126	62	155	50	127	36	80.5	347	383	405				24	M8	50	8	27	M6	40	6	21.5	F165B	10	165	130	200	12	3.5	4
90L	4⑧																																
90L	2,6										387	423	445																				
100L	2	217	193	163	80.5	195	60	147	48	100.5	425	465	489	134	M32	M32	28	M10	60	8	31	M8	50	8	27	F215B	11	215	180	250	14.5	4	4
	4,6										390	430	454																				
112M	4,6	239	196	163	80.5	195	60	150	48	100	409	449	475				28	M10	60	8	31	M8	50	8	27	F215B	11	215	180	250	14.5	4	4
132S	2,4,6	281	215	163	80.5	260	80	169	48	115.5	458	518	535.5				38	M12	80	10	41	M10	60	8	31	F265B	12	265	230	300	14.5	4	4
132M	2,4,6										508	568	585.5																				

① Shaft extension as per IEC:60072 / IS:1231

② 2 Nos. Conduit Entry as per IEC:60423 / IS:14763

③ Measured over bolt heads

④ Terminal box can be rotated in steps of 90°

⑤ Cable End box of Non Detachable type

⑥ No. of fixing holes

⑦ Flange as per IEC:60072 / IS:2223

⑧ For 1.5 Kw output

Definitive Dimensions:

A,B,B',C,H,K,D,E,F,GA are binding dimensions for all standard motors.


All other dimensions are subject to change.

For Valid dimensions, please contact Regional office in your region.

SIMOTICS 1LE7 motors

Dimensional drawings

1LE7 (Frame size 71-132) IMB14-IE2

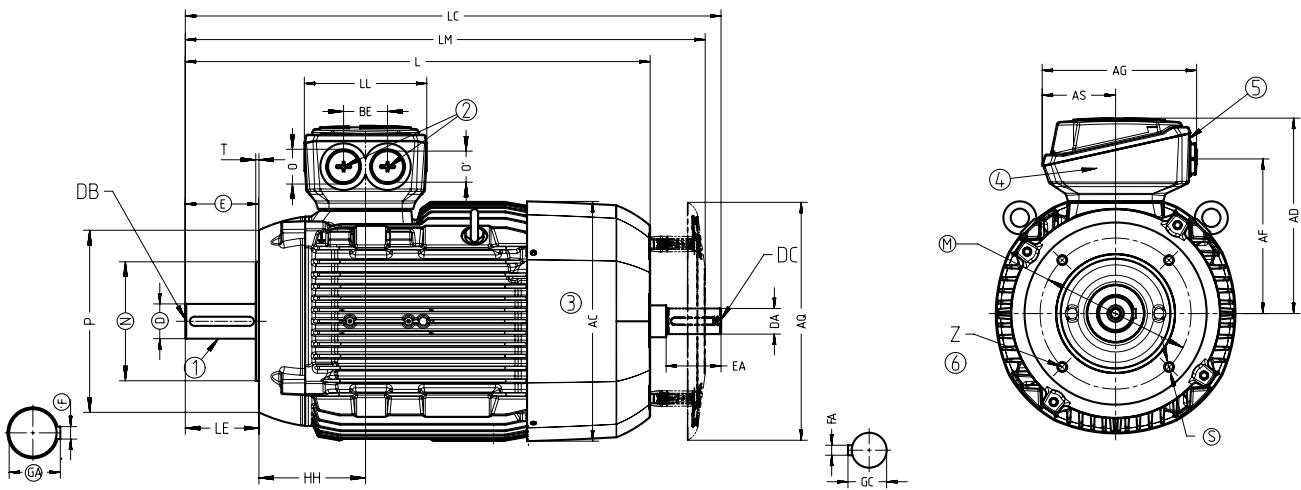

Frame size	No. of poles	Shaft extension												IM B14 Flange																			
		AC	AD	AG	AS	AQ	AF	BE	LE	HH	L	LM	LC	LL	O'	Drive end	Non-drive end					⑦	M	N	P	S	T	Z					
71M	2,4,6	145	149	126	62	125	112	36	30	66	240	272	278	102	M16	M25	14	M5	30	5	16	14	M5	30	5	16	F85C	85	70	105	M6	2.5	4
80M	2,4,6	162	159	126	62	155	122	36	40	72.5	292	328	342.5				19	M6	40	6	21.5	19	M6	40	6	21.5	F100C	100	80	120	M6	3	4
90S	2,4,6	180	164	126	62	155	127	36	50	80.5	347	383	405				24	M8	50	8	27	19	M6	40	6	21.5	F115C	115	95	140	M8	3	4
90L	4⑧																																
90L	2,6										387	423	445																				
100L	2	217	193	163	80.5	195	147	48	60	100.5	425	465	489	134	M32	M32	28	M10	60	8	31	24	M8	50	8	27	F130C	130	110	160	M8	3.5	4
	4,6										390	430	454																				
112M	4,6	239	196	163	80.5	195	150	48	60	100	409	449	475				28	M10	60	8	31	24	M8	50	8	27	F130C	130	110	160	M8	3.5	4
132S	2,4,6	281	215	163	80.5	260	169	48	80	115.5	458	518	535.5				38	M12	80	10	41	28	M10	60	8	31	F165C	165	130	200	M10	3.5	4
132M	2,4,6										508	568	585.5																				

① Shaft extension as per IEC:60072 / IS:1231

② 2 Nos. Conduit Entry as per IEC:60423 / IS:14763

③ Measured over bolt heads

④ Terminal box can be rotated in steps of 90°

⑤ Cable End box of Non Detachable type

⑥ No. of fixing holes

⑦ Flange as per IEC:60072 / IS:2223

⑧ For 1.5 Kw output


Definitive Dimensions:

A,B,B',C,H,K,D,E,F,GA are binding dimensions for all standard motors.

All other dimensions are subject to change.

For Valid dimensions, please contact Regional office in your region.

1LE7 (Frame size 160-225) IMB3-IE2

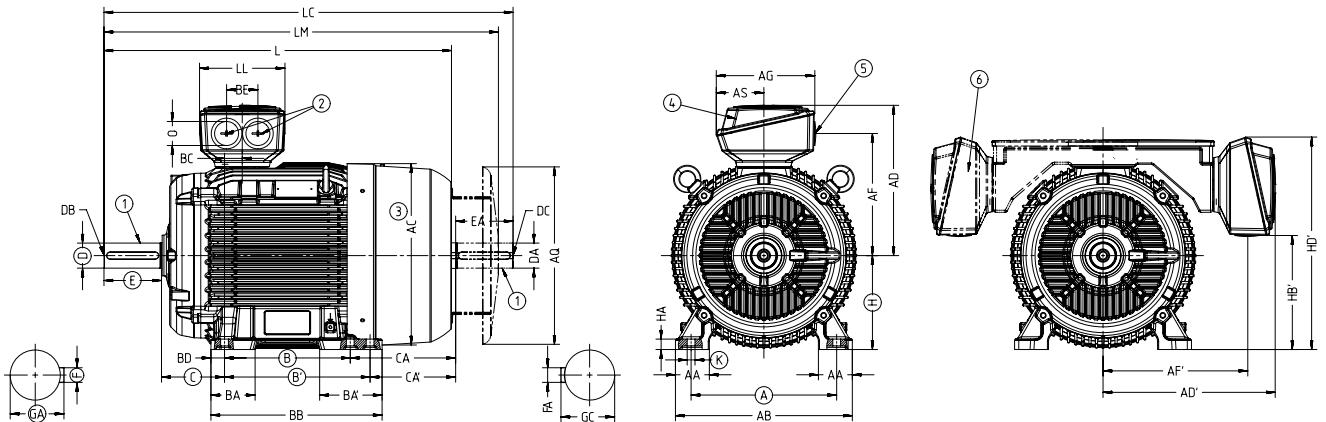

Frame size of poles	Shaft extension																										Drive end	Non-drive end														
	A	AA	AB	AC	AD	AD'	AG	AS	AQ	B	B'	BA	BA'	BB	BC	BD	BE	C	CA	CA'	H	HA	AF	HB'	AF'	HD'	K	L	LC	LL	LM	O	D	DB	E	F	GA	DA	DC	EA	FA	GC
160M 2,4,6	254	60	300	314	267	330	190	92	260	210	-	73	117	300	37	23	60	108	192	-	160	18	213	179	276	367	15	594	730	165	654	M40	42	M16	110	12	45	42	M16	110	12	45
160L 2,6											-	254																														
160L 4																																										
180M 2,4	279	65	339	356	288	330	190	92	340	241	-	85	120	328	34	26	60	121	202	-	180	20	234	220	276	408	15	668	784	165	758	M40	48	M16	110	14	51.5	48	M16	110	14	51.5
180L 4											-	279																														
180L 6																																										
200L 2,4,6	318	70	378	396	318	363	266	112	340	305	NA	104	104	355	31	25	85	133	177	-	200	25	259	209	304	471	19	721	835	197	811	M50	55	M20	110	16	59	55	M20	110	16	59
225S 4	356	80	436	449	341	363	266	112	425	286	-	93	118	361	15	25	85	149	218	-	225	34	282	257	304	519	19	788	903	197	885	M50	60	M20	140	18	64	55	M20	110	16	59
225M 2											-	311																														
225M 4																																										
225M 6																																										
																			193																							

① Shaft extension as per IEC:60072 / IS:1231

② 2 Nos. Conduit Entry as per IEC:60423 / IS:14763

③ Measured over bolt heads

④ Terminal box can be rotated in steps of 90°

⑤ Cable End box of Non Detachable type

⑥ For Terminal Box on left, view is "mirror image"

Definitive Dimensions:

A,B,B',C,H,D,E,F,GA are binding dimensions for all standard motors.


All other dimensions are subject to change.

For valid dimensions, please contact Regional office in your region.

SIMOTICS 1LE7 motors

Dimensional drawings

1LE7 (Frame size 160-225) IMB5/IMV1-IE2

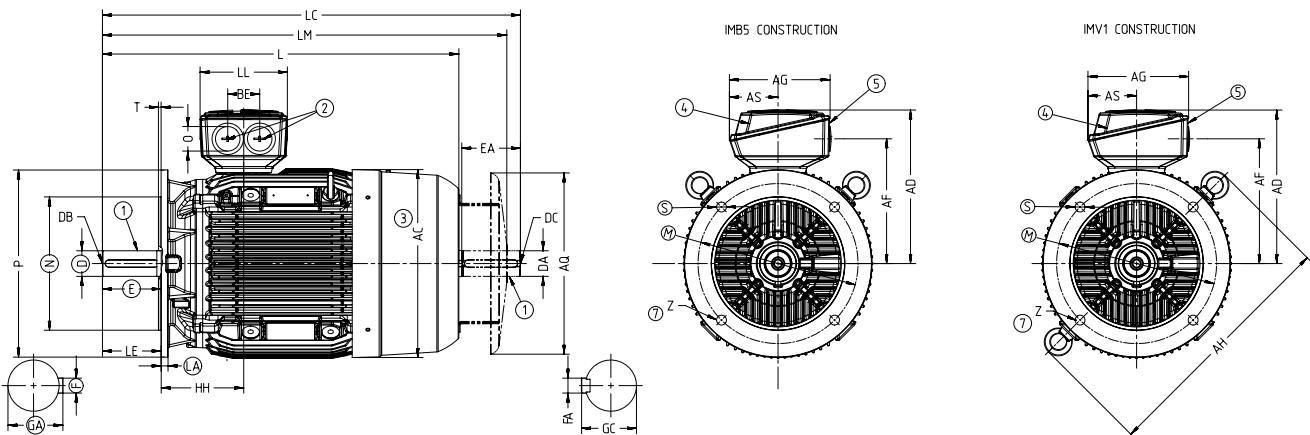

Frame size	No. of poles	Shaft extension																Flange												
		Drive end								Non-drive end								⑥	LA	M	N	P	S	T	Z					
		AC	AD	AF	AG	AH	AS	AQ	BE	HH	L	LC	LE	LL	LM	O	D	DB	E	F	GA	DA	DC	EA	FA	GC	Number			
160M	2,4,6	314	267	213	190	396	92	260	60	145	594	730	110	165	654	M40	42	M16	110	12	45	42	M16	110	12	45	F3008	13 300 250 350 18.5 5 4		
160L	2,6										654	790			714															
	4										594	730			654															
180M	2,4	356	288	234	190	468	92	340	60	155	668	784	110	165	758	M40	48	M16	110	14	51.5	48	M16	110	14	51.5	F3008	13 300 250 350 18.5 5 4		
180L	4										698	814			788															
	6										668	784			758															
200L	2,4,6	396	318	259	266	533	112	340	85	164	721	835	110	197	811	M50	55	M20	110	16	59	55	M20	110	16	59	F3508	15 350 300 400 18.5 5 4		
225S	4	449	341	282	266	556	112	425	85	164	788	903	140	197	885	M50	60	M20	140	18	64	55	M20	110	16	59	F4008	16 400 350 450 18.5 5 8		
225M	2										818	933	110		915		55		110	16	59	48	M16	110	14	51.5				
	4										848	963	140		945		60		140	18	64	55	M20	110	16	59				
	6										788	903			885															

① Shaft extension as per IEC:60072 / IS:1231

② 2 Nos. Conduit Entry as per IEC:60423 / IS:14763

③ Measured over bolt heads

④ Terminal box can be rotated in steps of 90°

⑤ Cable End box of Non Detachable type

⑥ Flange as per IEC:60072 / IS:2223

⑦ No. of fixing holes


Definitive Dimensions:

M, N, S, D, E, F, GA, LA are binding dimensions for all standard motors.

All other dimensions are subject to change.

For Valid dimensions, please contact Regional office in your region.

1LE7 (Frame size 250-315) IMB3-IE2

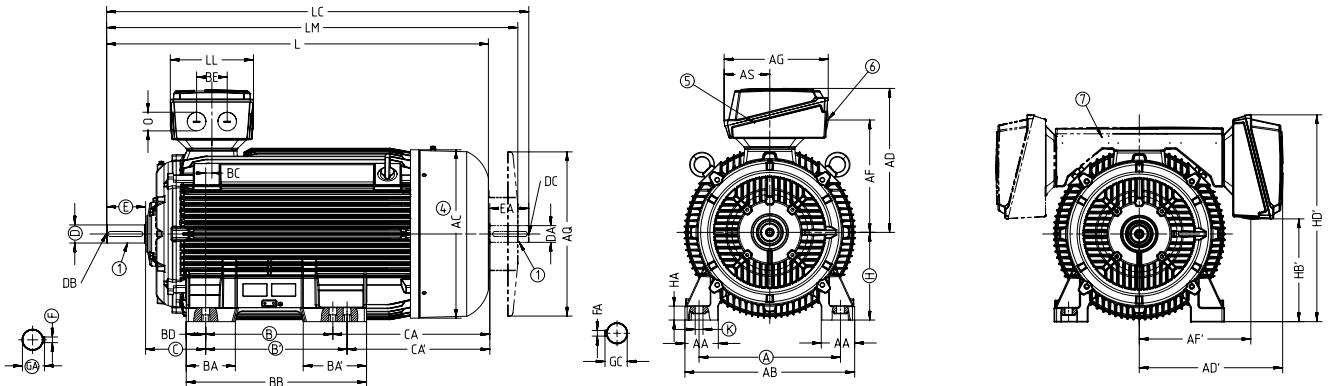

Frame size of poles	No.	Shaft extension																						Non-drive end																																			
		A	AA	AB	AC	AD	AD'	AG	AS	AQ	B	B'	BA	BA'	BB	BC	BD	BE	C	CA	CA'	H	HA	AF	HB'	AF'	HD'	K	L	LC	LL	LM	O	Drive end	D	DB	E	F	GA	DA	DC	EA	FA	GC															
250M	2	406	100	490	497	410	435	319	145	470	349	NA	102	102	409	24	30	110	168	235	NA	250	40	320	290	345	600	24	887	1002	233	984	③	60	②	140	18	64	55	②	110	16	59																
	4,6																																																										
280S	2	457	100	540	551	435	435	319	145	525	368	-	101	152	479	20	30	110	190	267	-	280	40	345	340	345	655	24	960	1105	233	1066	③	65	②	140	18	69	60	②	140	18	64																
	4,6																																																										
280M	2											-	419						-	326									1070	1215	1176	65																											
	4																																																										
	6																			216										960	1105	1066	75																										
315S	2	508	120	610	616	515	515	374	164	590	406	-	113	170	527	22	35	110	216	295	-	315	50	405	375	405	745	28	1052	1197	299	1158	③	65	②	140	18	69	60	②	140	18	64																
	4,6																														1082	1227	1188	80	170	22	85	70		20	74.5																		
315M	2											-	457	-						244	-								1052	1197	1158	65	140	18	69	60		18	64																				
	4																		578		409								1247	1392	1353	80	170	22	85	70		20	74.5																				
	6																	527		244								1082	1227	1188	80	170	22	85	70		20	74.5																					
315L	2											-	508	176	227	648	70	-	513									1372	1517	1478	65	140	18	69	60		18	64																					
	4,6																	113	170	578	35		358								1247	1392	1353	80	170	22	85	70		20	74.5																		
	⑧4																	176	227	648	70		513								1402	1547	1508	80	170	22	85	70		20	74.5																		

① Shaft extension as per IEC:60072 / IS:1231

② Protected Centre hole M20x42

③ 2 Nos. Conduit Entry M63x1.5-IEC:60423 / IS:14763

④ Measured over bolt heads

⑤ Terminal box can be rotated in steps of 90°

⑥ Cable End box of Non Detachable type

⑦ For Terminal Box on left, view is "mirror image"

⑧ For output 200 kW of 4 pole

Definitive Dimensions:

A,B,B',C,H,K,D,E,F,GA are binding dimensions for all standard motors.


All other dimensions are subject to change.

For valid dimensions, please contact Regional office in your region.

SIMOTICS 1LE7 motors

Dimensional drawings

1LE7 IE2 (Frame size 250-315) IMB5/V1

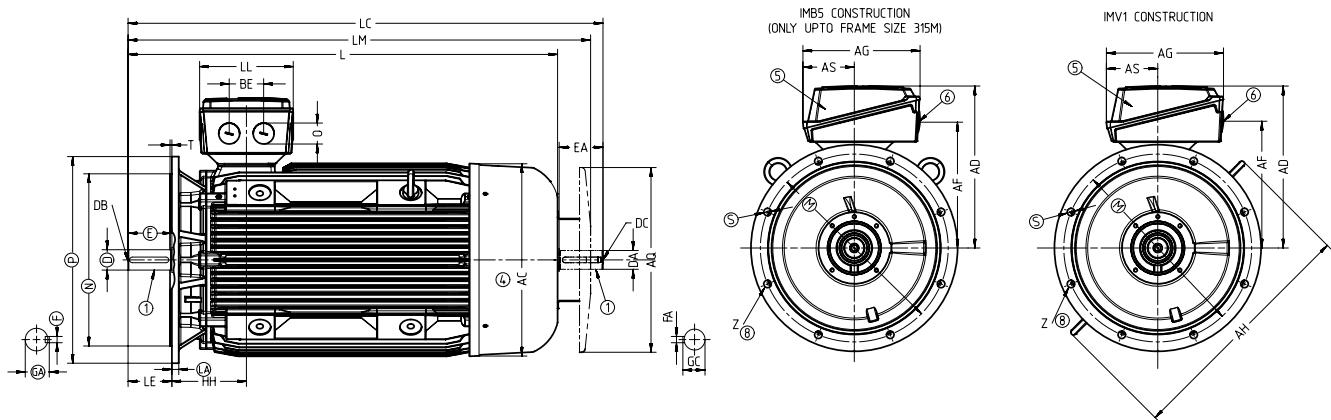

Frame size	No. of poles	Shaft extension														Flange												
		Drive end				Non-drive end																						
		AC	AD	AG	AF	AH	AQ	AS	BE	HH	L	LC	LE	LL	LM	O	D	DB	E	F	GA	DA	DC	EA	GC			
250M	2	497	410	319	320	620	470	145	110	192	887	1002	140	233	984	③	60	②	140	18	64	55	②	110	16	59		
	4,6											1032					65			69	60		140	18	64			
280S	2	551	435	319	345	672	525	145	110	210	960	1105	140	233	1066	③	65	②	140	18	69	60	②	140	18	64		
	4,6																75			20	79.5	65				69		
280M	2											1070	1215			1176		65			18	69	60				64	
	4																75			20	79.5	65				69		
	6											960	1105			1066		75			20	79.5	65				69	
315S	2	616	515	374	405	780	590	164	110	238	1052	1197	140	299	1158	③	65	②	140	18	69	60	②	140	18	64		
	4,6											1082	1227	170		1188		80		170	22	85	70				20	74.5
315M	2											1052	1197	140		1158		65		140	18	69	60				18	64
	4											1247	1392	170		1353		80		170	22	85	70				20	74.5
	6											1082	1227	170		1188		80		170	22	85	70				20	74.5
315L	2											1372	1517	140		1478		65		140	18	69	60				18	64
	4,6											1247	1392	170		1353		80		170	22	85	70				20	74.5
	4④											1402	1547	170		1508		80		170	22	85	70				20	74.5

① Shaft extension as per IEC:60072 / IS:1231

② Protected Centre hole M20x42

③ 2 Nos. Conduit Entry M63x1.5-IEC:60423 / IS:14763

④ Measured over bolt heads

⑤ Terminal box can be rotated in steps of 90°

⑥ Cable End box of Non Detachable type

⑦ Flange as per IEC:60072 / IS:2223

⑧ No. of fixing holes

⑨ For output 200 kW of 4 pole


Definitive Dimensions:

M, N, S, D, E, F, GA and LA are binding dimensions for all standard motors.

All other dimensions are subject to change.

For Valid dimensions, please contact Regional office in your region.

1LE7 (Frame size 71-132) IMB3-IE3

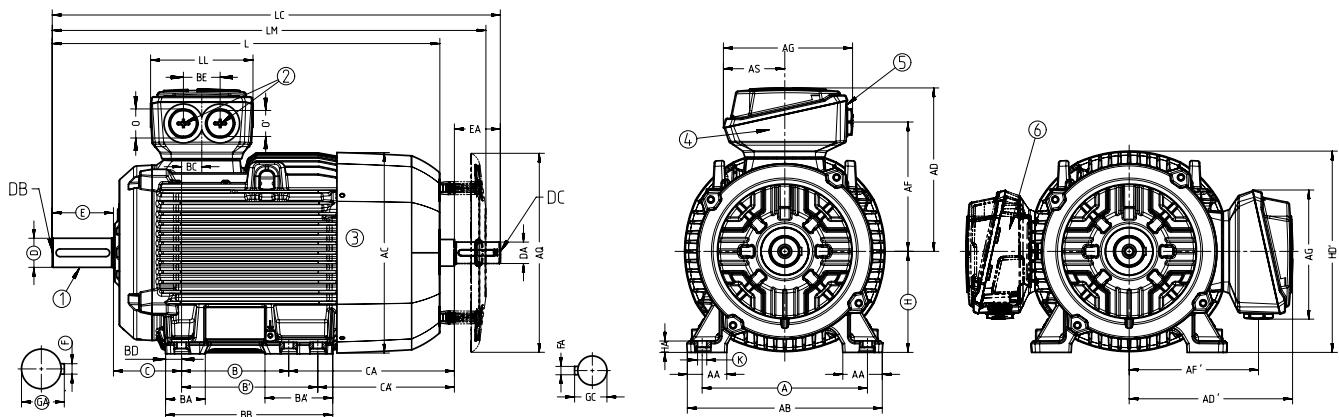

Frame size	No. of poles	Shaft extension																																									
		A	AA	AB	AC	AD	AD'	AG	AS	AQ	B	B'	BA	BA'	BB	BC	BD	BE	C	CA	CA'	H	HA	AF	AF'	HD'	K	L	LM	LC	LL	O	O'	Drive end	Non-drive end								
71M	2,4,6	112	30.5	132	145	149	NA	126	62	125	90	NA	NA	NA	106	21	8	36	45	83	NA	71	7	112	NA	NA	7.5	240	272	278	102	M16	M25	14	M5	30	5	16					
80M	2,4,6	125	30.5	150	162	159	NA	126	62	155	100	NA	NA	NA	118	22.5	9	36	50	112.5	NA	80	8	122	NA	NA	10	292	328	342.5	19	M6	40	6	21.5								
80M	4,6⑦																										327	363	377.5														
90S⑨	2,4,6	140	30.5	165	180	164	NA	126	62	155	100	-	NA	NA	143	24.5	9	36	56	159	-	90	11	127	NA	NA	10	347	383	405	24	M8	50	8	27	19	M6	40	6	21.5			
90L⑨	2,4																										387	423	445														
100L	2,4	160	42	196	217	193	193	163	80.5	195	140	NA	48	48	176	37.5	18	48	63	176	NA	100	12	147	147	202	12	425	465	489	134	M32	M32	28	M10	60	8	31	24	M8	50	8	27
			6																								390	430	454														
112M	4,6	190	46	226	239	196	196	163	80.5	195	140	NA	48	48	176	30	18	48	70	155	NA	112	12	150	150	226	12	409	449	475	28	M10	60	8	31	24	M8	50	8	27			
132S	2,6	216	53	256	281	215	215	163	80.5	260	140	-	52	89	218	26.5	20	48	89	166.5	-	132	15	169	169	266	12	458	518	535.5	38	M12	80	10	41	28	M10	60	8	31			
132S	4⑧																										216.5	-	508	568	585.5												
132M	2,4																										-	178.5															

① Shaft extension as per IEC:60072 / IS:1231

② 2 Nos. Conduit Entry as per IEC:60423 / IS:14763

③ Measured over bolt heads

④ Terminal box can be rotated in steps of 90°

⑤ Cable End box of Non Detachable type

⑥ For Terminal Box on left, view is "mirror image"

⑦ For 0.75 kw (4P) & 0.55kW (6P) outputs

⑧ For 5.5kW output

⑨ Eye bolt provided as lifting arrangement

Definitive Dimensions:

A,B,B',C,H,K,D,E,F,GA are binding dimensions for all standard motors.


All other dimensions are subject to change.

For Valid dimensions, please contact Regional office in your region.

SIMOTICS 1LE7 motors

Dimensional drawings

1LE7 (Frame size 71-132) IMB5/IMV1-IE3

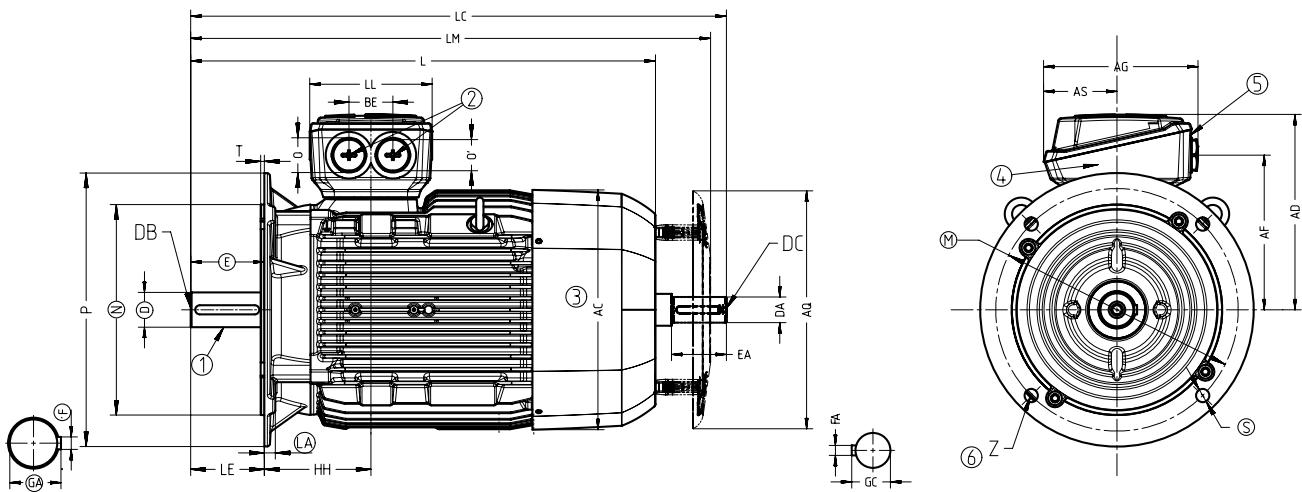

Frame size	No. of poles	Shaft extension														Flange																				
		AC	AD	AG	AS	AQ	LE	AF	BE	HH	L	LM	LC	LL	O	O'	D	DB	E	F	GA	DA	DC	EA	FA	GC	⑦ Number	LA	M	N	P	S	T	Z		
71M	2,4,6	145	149	126	62	125	30	112	36	66	240	272	278	102	M16	M25	14	M5	30	5	16	14	M5	30	5	16	F130B	5	130	110	160	10	3.5	4		
80M	2,4,6	162	159	126	62	155	40	122	36	72.5	292	328	342.5				19	M6	40	6	21.5	19	M6	40	6	21.5	F165B	10	165	130	200	12	3.5	4		
80M	4,6⑧							327	363	377.5																										
90S	2,4,6	180	164	126	62	155	50	127	36	80.5	347	383	405				24	M8	50	8	27	19	M6	40	6	21.5	F165B	10	165	130	200	12	3.5	4		
90L	2,4,6							387	423	445																										
100L	2,4	217	193	163	80.5	195	60	147	48	100.5	425	465	489	134	M32	M32	28	M10	60	8	31	24	M8	50	8	27	F215B	11	215	180	250	14.5	4	4		
	6							390	430	454																										
112M	4,6	239	196	163	80.5	195	60	150	48	100	409	449	475				28	M10	60	8	31	24	M8	50	8	27	F215B	11	215	180	250	14.5	4	4		
132S	2,6	281	215	163	80.5	260	80	169	48	115.5	458	518	535.5				38	M12	80	10	41	28	M10	60	8	31	F265B	12	265	230	300	14.5	4	4		
	4⑨							508	568	585.5																										
132M	2,4																																			

① Shaft extension as per IEC:60072 / IS:1231

② 2 Nos. Conduit Entry as per IEC:60423 / IS:14763

③ Measured over bolt heads

④ Terminal box can be rotated in steps of 90°

⑤ Cable End box of Non Detachable type

⑥ No. of fixing holes

⑦ Flange as per IEC:60072 / IS:2223

⑧ For 0.75 kW (4P) & 0.55kW (6P) outputs

⑨ For 5.5 kW output


Definitive Dimensions:

A,B,B',C,H,K,D,E,F,GA are binding dimensions for all standard motors.

All other dimensions are subject to change.

For Valid dimensions, please contact Regional office in your region.

1LE7 (Frame size 71-132) IMB14-IE3

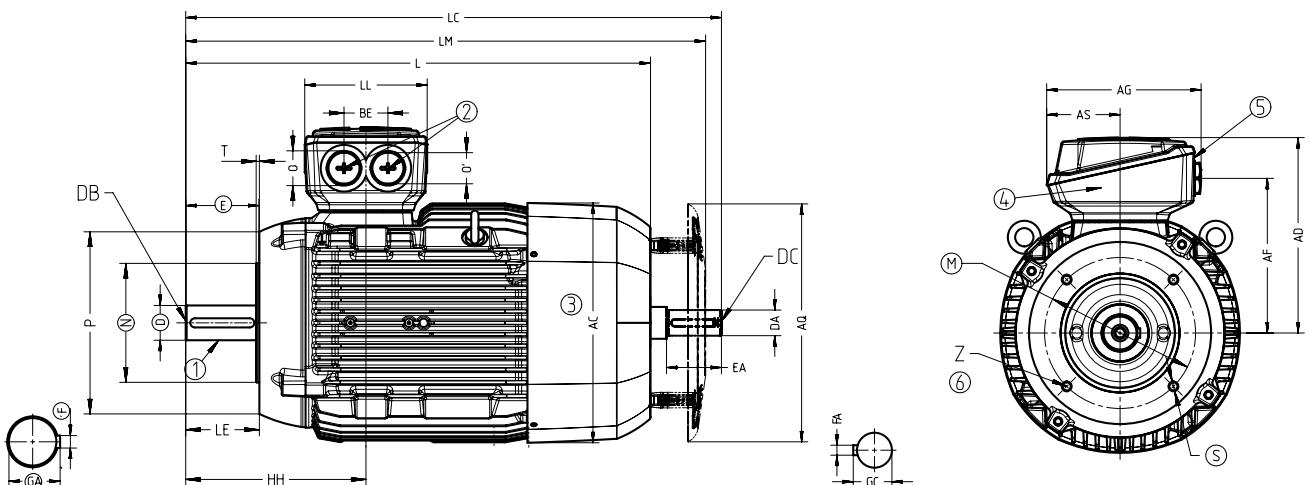

Frame size	No. of poles	Shaft extension												IM B14 Flange																			
		AC	AD	AG	AS	AQ	AF	BE	LE	HH	L	LM	LC	LL	O'	D	DB	E	F	GA	DA	DC	EA	FA	GC	⑦ Number	M	N	P	S	T	Z	
71M	2,4,6	145	149	126	62	125	112	36	30	66	240	272	278	102	M16	M25	14	M5	30	5	16	F85C	85	70	105	M6	2.5	4					
80M	2,4,6	162	159	126	62	155	122	36	40	72.5	292	328	342.5				19	M6	40	6	21.5	19	M6	40	6	21.5	F100C	100	80	120	M6	3	4
80M	4,6⑧										327	363	377.5																				
90S	2,4,6	180	164	126	62	155	127	36	50	80.5	347	383	405				24	M8	50	8	27	19	M6	40	6	21.5	F115C	115	95	140	M8	3	4
90L	2,4,6										387	423	445																				
100L	2,4	217	193	163	80.5	195	147	48	60	100.5	425	465	489	134	M32	M32	28	M10	60	8	31	24	M8	50	8	27	F130C	130	110	160	M8	3.5	4
	6										390	430	454																				
112M	4,6	239	196	163	80.5	195	150	48	60	100	409	449	475				28	M10	60	8	31	24	M8	50	8	27	F130C	130	110	160	M8	3.5	4
132S	2,6	281	215	163	80.5	260	169	48	80	115.5	458	518	535.5				38	M12	80	10	41	28	M10	60	8	31	F165C	165	130	200	M10	3.5	4
	4⑨										508	568	585.5																				
132M	2,4																																

① Shaft extension as per IEC:60072 / IS:1231

② 2 Nos. Conduit Entry as per IEC:60423 / IS:14763

③ Measured over bolt heads

④ Terminal box can be rotated in steps of 90°

⑤ Cable End box of Non Detachable type

⑥ No. of fixing holes

⑦ Flange as per IEC:60072 / IS:2223

⑧ For 0.75 kW (4P) & 0.55 kW (6P) outputs

⑨ For 5.5 kW output

Definitive Dimensions:

A,B,B',C,H,K,D,E,F,GA are binding dimensions for all standard motors.


All other dimensions are subject to change.

For Valid dimensions, please contact Regional office in your region.

SIMOTICS 1LE7 motors

Dimensional drawings

1LE7503 (Frame size 160-225) IMB3-IE3

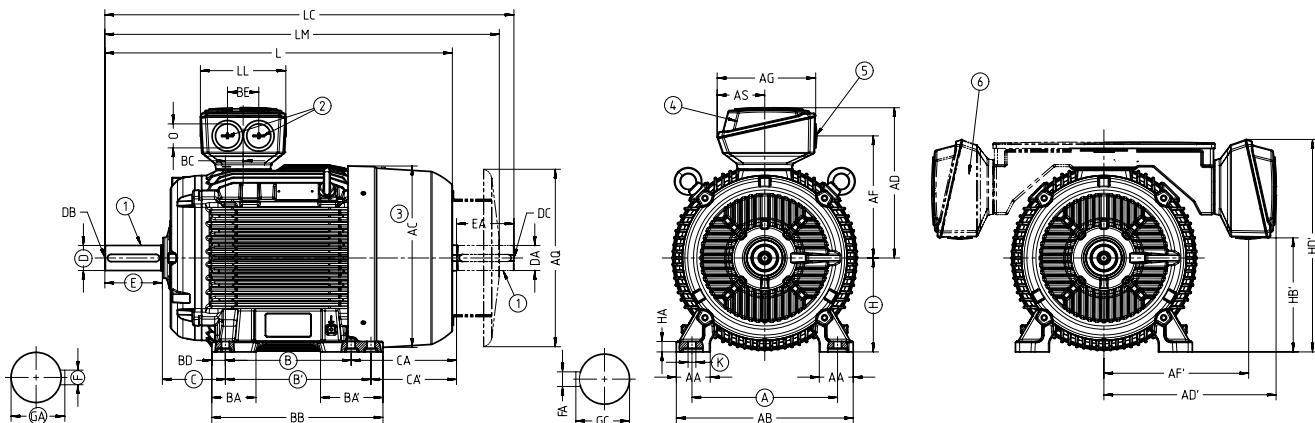

Frame No. size of poles	Shaft extension																																							
	A	AA	AB	AC	AD	AD'	AG	AS	AQ	B	B'	BA	BA'	BB	BC	BD	BE	C	CA	CA'	H	HA	AF	HB'	AF'	HD'	K	L	LC	LL	LM	O	Drive end	Non-drive end						
160M 2,4,6	2,4,6	254	60	300	333.5	267	330	190	92	260	210	-	73	117	300	37	23	60	108	192	-	160	18	213	179	276	367	15	594	730	165	654	M40	42	M16	110	12	45		
		2⑦																			252							654	790	714										
160L 2,4,6	2,4,6																				-	254																		
																					-	208																		
180M 2,4	2,4	279	65	339	356	288	330	190	92	340	241	-	85	120	328	34	26	60	121	202	-	180	20	234	220	276	408	15	668	784	165	758	M40	48	M16	110	14	51.5		
180L 4																					-	279																		
6																						-	194																	
																							164																	
200L 2,4,6	2,4,6	318	70	378	396	318	363	266	112	340	305	NA	104	104	355	31	25	85	133	177	-	200	25	259	209	304	471	19	721	835	197	811	M50	55	M20	110	16	59		
225S 4	4	356	80	436	449	341	363	266	112	425	286	-	92	117	361	15	25	85	149	278	-	225	34	282	257	304	519	19	848	963	197	945	M50	60	M20	140	18	64		
225M 2	2																			-	311																			
																					-	253																		
	4,6																						818	933	915	55	110	16	59	48	M16	14	51.5	M20	110	16	59			
																							848	963	945	60	140	18	64	55	M20	16	59							

① Shaft extension as per IEC:60072 / IS:1231

② 2 Nos. Conduit Entry as per IEC:60423 / IS:14763

③ Measured over bolt heads

④ Terminal box can be rotated in steps of 90°

⑤ Cable End box of Non Detachable type

⑥ For Terminal Box on left, view is "mirror image"

⑦ For 15 kW output


Definitive Dimensions:

A,B,B',C,H,K,D,E,F,GA are binding dimensions for all standard motors.

All other dimensions are subject to change.

For valid dimensions, please contact Regional office in your region.

1LE7503 (Frame size 160-225) IMB5/IMV1-IE3

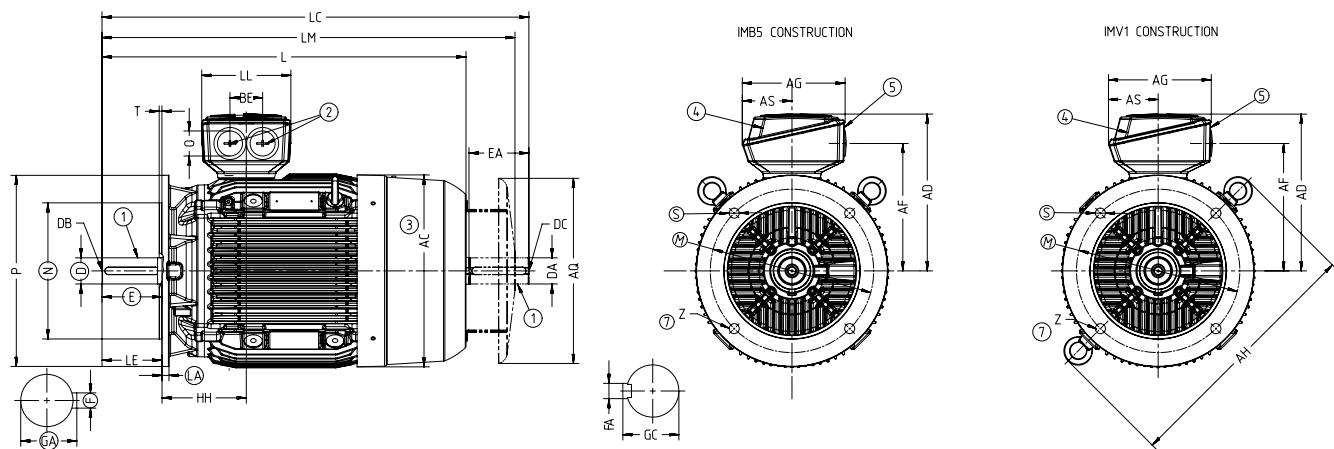

Frame size	No. of poles	Shaft extension																Non-drive end				⑥ Number	LA	M	N	P	S	T	Z										
		AC	AD	AF	AG	AH	AS	AQ	BE	HH	L	LC	LE	LL	LM	O	Drive end	Non-drive end																					
160M	2,4,6	333.5	267	213	190	396	92	260	60	145	594	730	110	165	654	M40	42	D	DB	E	F	GA	DA	DC	EA	FA	GC	F3008	13	300	250	350	18.5	5	4				
	2@										654	790																											
160L	2,4,6																																						
180M	2,4	356	288	234	190	468	92	340	60	155	668	784	110	165	758	M40	48	M16	110	14	51.5	48	M16	110	14	51.5	F3008	13	300	250	350	18.5	5	4					
180L	4										698	814																											
	6										668	784																											
200L	2,4,6	396	318	259	266	533	112	340	85	164	721	835	110	197	811	M50	55	M20	110	16	59	55	M20	110	16	59	F3508	15	350	300	400	18.5	5	4					
225S	4	449	341	282	266	556	112	425	85	164	848	963	140	197	945	M50	60	M20	140	18	64	55	M20	110	16	59	F4008	16	400	350	450	18.5	5	8					
225M	2										818	933	110		915			55		110	16	59	48	M16		14	51.5												
	4,6										848	963	140		945			60		140	18	64	55	M20		16	59												

① Shaft extension as per IEC:60072 / IS:1231

② 2 Nos. Conduit Entry as per IEC:60423 / IS:14763

③ Measured over bolt heads

④ Terminal box can be rotated in steps of 90°

⑤ Cable End box of Non Detachable type

⑥ Flange as per IEC:60072 / IS:2223

⑦ No. of fixing holes

⑧ For 15 kW output

Definitive Dimensions:

M, N, S, D, E, F, GA, LA are binding dimensions for all standard motors.


All other dimensions are subject to change.

For Valid dimensions, please contact Regional office in your region.

SIMOTICS 1LE7 motors

Dimensional drawings

1LE7 (Frame size 250-315) IMB3-IE3

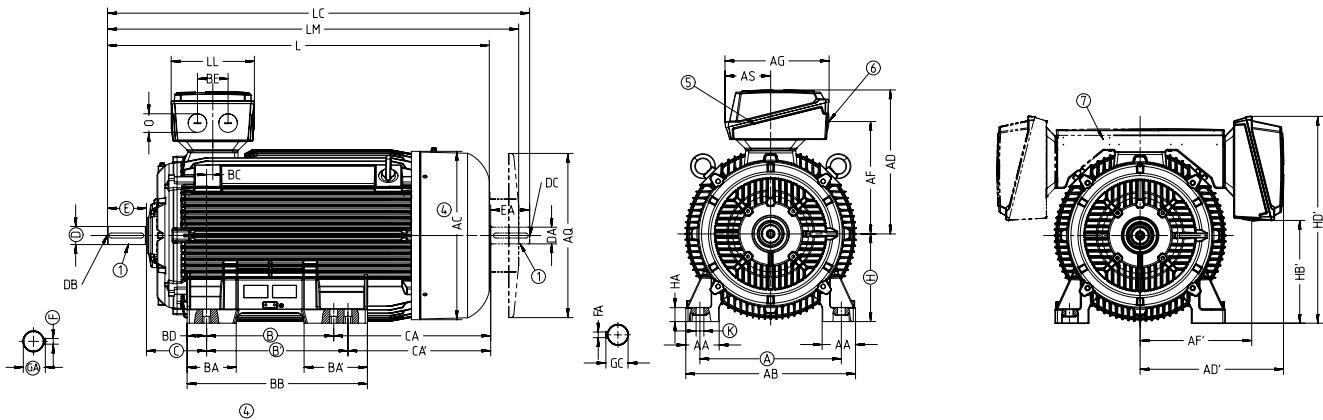

Frame size	No. of poles	④																				Shaft extension																					
		A	AA	AB	AC	AD	AD'	AG	AS	AQ	B	B'	BA	BA'	BB	BC	BD	BE	C	CA	CA'	H	HA	AF	HB'	AF'	HD'	K	L	LC	LL	LM	O	Drive end	Non-drive end	D	DB	E	F	GA	DA	DC	EA
250M 4,6,8	2	406	100	490	497	410	435	319	145	470	349	NA	102	102	409	24	30	110	168	235	-	250	40	320	290	345	600	24	887	1002	233	984	③	60	②	140	18	64	55	②	110	16	59
280S 4,6,8	2	457	100	540	551	435	435	319	145	525	368	-	101	152	479	20	30	110	190	267	-	280	40	345	340	345	655	24	960	1105	233	1066	③	65	②	140	18	69	60	②	140	18	64
280M 4,6,8	2											-	419								-	326								1070	1215	1176	65	75	20	79.5	65	69					
315S 4,6,8	2	508	120	610	616	515	515	374	164	590	406	-	113	170	527	22	35	110	216	295	-	315	50	405	375	405	745	28	1052	1197	299	1158	③	65	②	140	18	69	60	②	140	18	64
315M 4,6,8	2											-	457	-	578															1082	1227	1188	80	170	22	85	70	20	74.5				
315L 4,6 ④, ⑥,8	2											-	508	176	227	648	70	-	513									1217	1362	1323	65	140	18	69	60	18	64						
													113	170	578	35			358									1247	1392	1353	80	170	22	85	70	20	74.5						
																													1372	1517	1478	65	140	18	69	60	18	64					
																													1402	1547	1508	80	170	22	85	70	20	74.5					
																													1247	1392	1353	80	170	22	85	70	20	74.5					

① Shaft extension as per IEC:60072 / IS:1231

② Protected Centre hole M20x42

③ 2 Nos. Conduit Entry M63x1.5-IEC:60423 / IS:14763

④ Measured over bolt heads

⑤ Terminal box can be rotated in steps of 90°

⑥ Cable End box of Non Detachable type

⑦ For Terminal Box on left, view is "mirror image"

⑧ For output 160 kw of 4 pole

⑨ For output 110 kw of 6 pole


Definitive Dimensions:

A,B,B',C,H,K,D,E,F,GA are binding dimensions for all standard motors.

All other dimensions are subject to change.

For Valid dimensions, please contact Regional office in your region.

1LE7 (Frame size 250-315) IMB5/V1-IE3

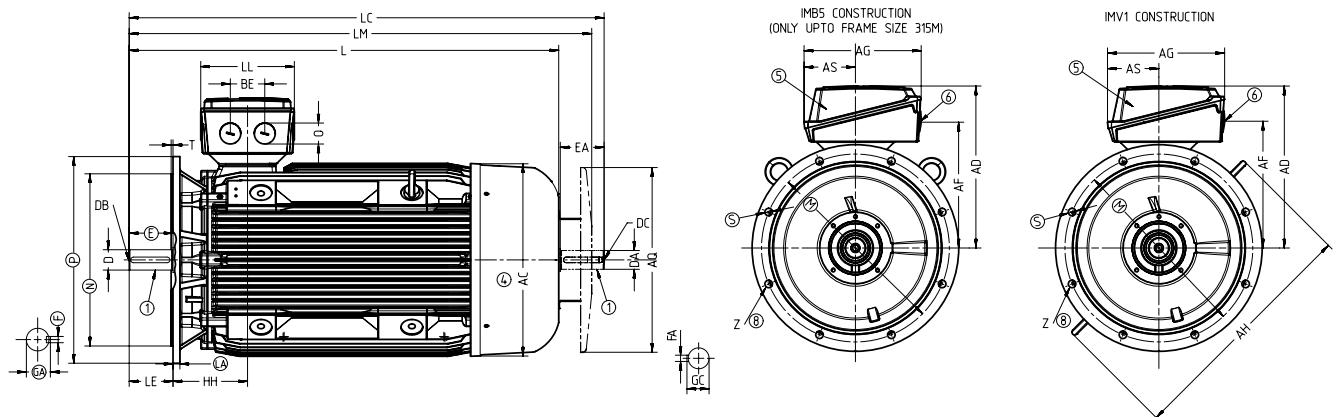

Frame size	No. of poles	① AC	AD	AG	AF	AH	AQ	AS	BE	HH	L	LC	LE	LL	LM	O	Shaft extension					Non-drive end					Flange											
																	D	DB	E	F	GA	DA	DC	EA	FA	GC	②	③	④	⑤	Z							
250M	2	497	410	319	320	620	470	145	110	192	887	1002	140	233	984	③	60	②	140	18	64	55	②	110	16	59	F500B	18	500	450	550	19	5	8				
	4,6,8																1032		65		69	60		140	18	64												
280S	2	551	435	319	345	672	525	145	110	210	960	1105	140	233	1066	③	65	②	140	18	69	60	②	140	18	64	F500B	18	500	450	550	19	5	8				
	4,6,8																		75		20	79.5	65															
280M	2																1070	1215			1176	65		18	69	60												
	4																		75		20	79.5	65															
	6,8																960	1105			1066	75		20	79.5	65												
315S	2	616	515	374	405	780	590	164	110	238	1052	1197	140	299	1158	③	65	②	140	18	69	60	②	140	18	64	F600B	22	600	550	660	24	6	8				
	4,6,8																1082	1227	170		1188	80		170	22	85	70											
315M	2																1217	1362	140		1323	65		140	18	69	60											
	4,6,8																1247	1392	170		1353	80		170	22	85	70											
315L	2																1372	1517	140		1478	65		140	18	69	60											
	4,6																1402	1547	170		1508	80		170	22	85	70											
	⑩4, ⑪6,8																1247	1392	170		1353	80		170	22	85	70											

① Shaft extension as per IEC:60072 / IS:1231

② Protected Centre hole M20x42

③ 2 Nos. Conduit Entry M63x1.5-IEC:60423 / IS:14763

④ Measured over bolt heads

⑤ Terminal box can be rotated in steps of 90°

⑥ Cable End box of Non Detachable type

⑦ Flange as per IEC:60072 / IS:2223

⑧ No. of fixing holes

⑨ For output 160 kw of 4 pole

⑩ For output 110 kw of 6 pole

Definitive Dimensions:

M, N, S, D, E, F, GA and LA are binding dimensions for all standard motors.

All other dimensions are subject to change.

For Valid dimensions, please contact Regional office in your region.

SIMOTICS-1LE7

Position in the MLFB

Code suffixes

Type of digit in the position

MLFB

1 st	2 nd	3 rd	4 th	5 th	6 th	7 th	8 th	9 th	10 th	11 th	12 th	M	13 th	14 th	15 th	16 th	
N	A	A	N	N	N	N	-	N	A	A	N	-	N	A	A	N	
1	L	E	7	5	0	3	-	2	C	B	2	3	-	5	J	H	5

Material of Housing & Design		For 1LE75														For 1LE76 and 1LE77																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
5 th	← Position in the MLFB	Frame Size		No. of Poles		Construction Length (Output assignment for Standard output versions-single speed motors)												Frame Size		No. of Poles		Construction Length (Output assignment for reduced output versions-single speed motors)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
		8 th & 9 th Position	10 th Position	11 th Position		0	1	2	3	4	5	6	Length S						Length M						Length L						8 th & 9 th Position	10 th Position	11 th Position		Length S						Length M						Length L																																																																																																																																																																																																																																																																																																																																																																																																																																																																						
Code	SH			Code	Poles	Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH		Output (kW)												Code		SH	

Siemens Limited
Digital Industries
Motion Control : Low Voltage Motors
R&D Technology Centre
Thane Belapur Road, Airoli Node
Navi Mumbai - 400 708
Fax: +91 22 33265504
E-mail: motors.in@siemens.com

Order No.: 111392954
DI-LVM-CAT-0302-2021

www.siemens.co.in

For more information call us on 1800 209 1800

For Life Cycle Support of Products, Systems and Solutions
call us on 1800 209 0987

Product upgradation is a continuous process. Hence, data in this catalog is subject to change without prior notice. For the latest information, please get in touch with our Sales Offices.