Half Adder Circuit Diagram

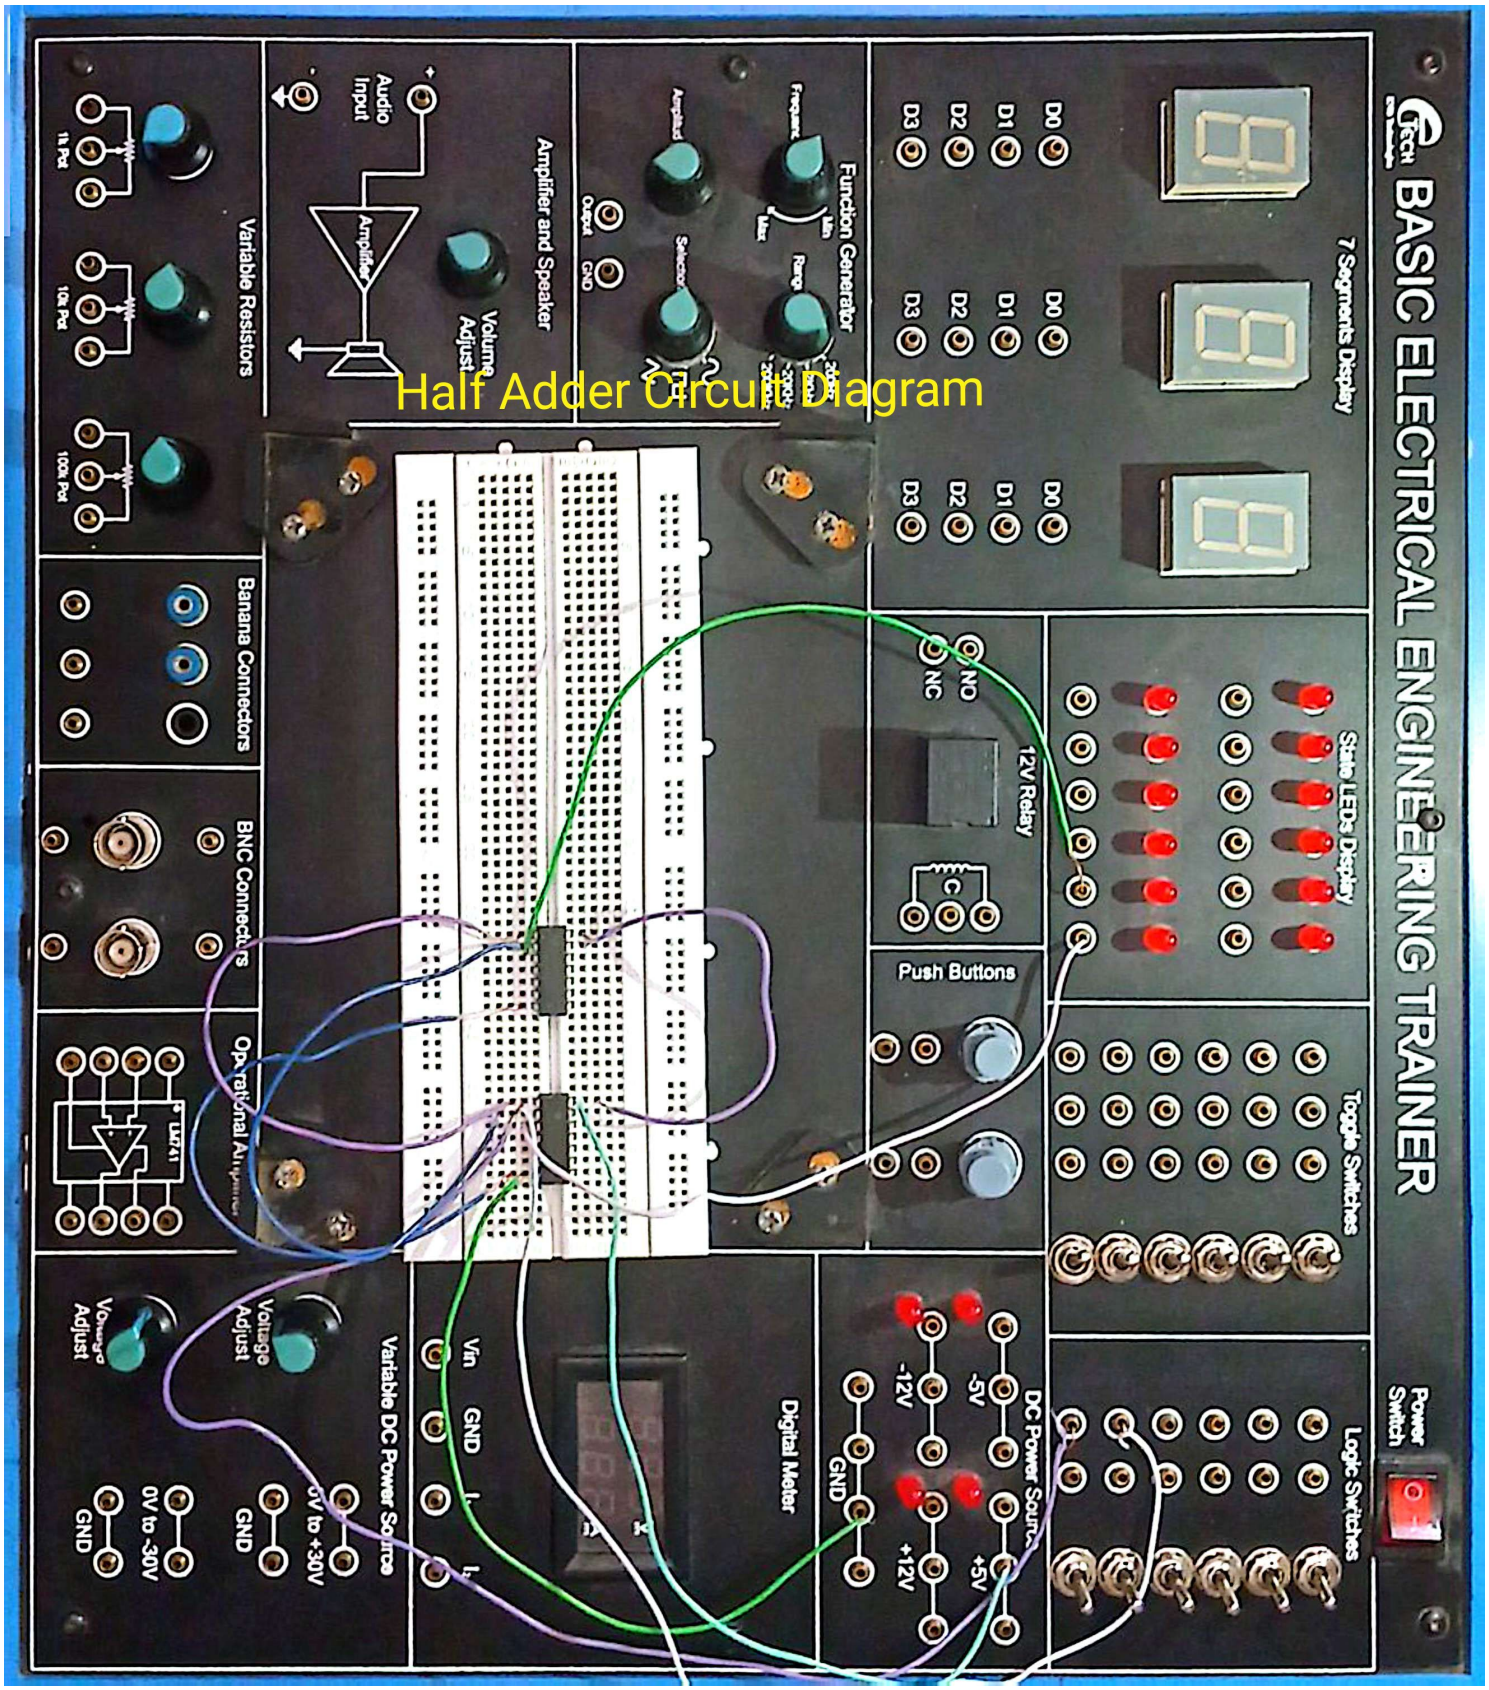

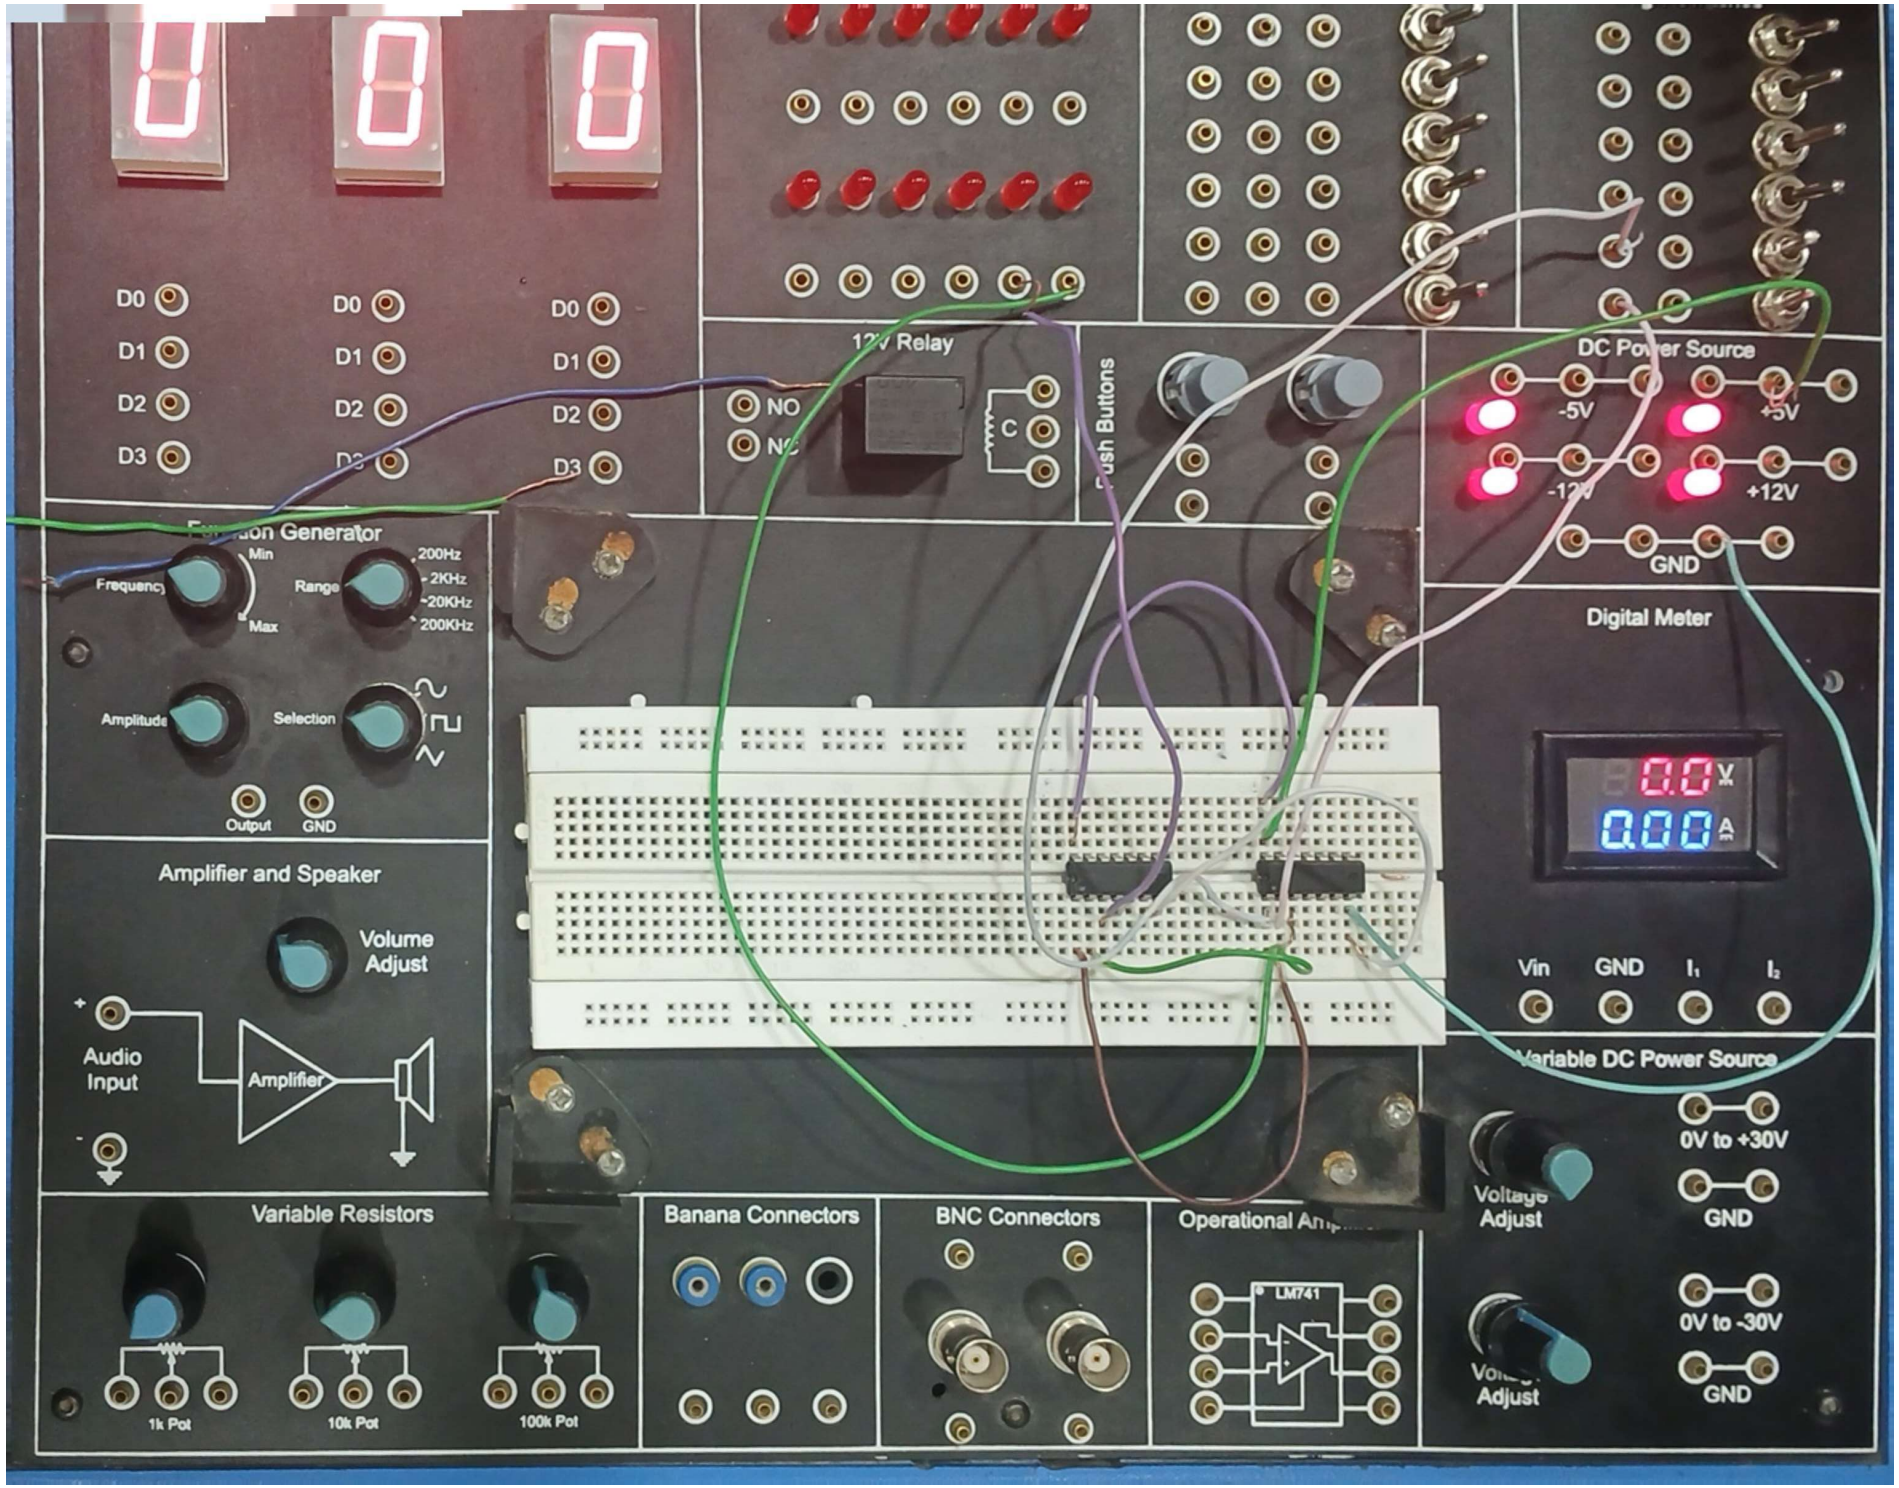
D0
D1
D2
D3
12V Relay
NO
C
Push Buttons
DC Power Source
-5V
+5V
-12V
+12V
GND
Frequency
Min
Max
Range
200Hz
2KHz
20KHz
200KHz
Amplitude
Selection
Output
GND
Digital Meter
Vin
GND
Amplifier and Speaker
Volume Adjust
Audio Input
Amplifier
Variable DC Power Source
0V to +30V
GND
0V to -30V
GND
Variable Resistors
1k Pot
10k Pot
100k Pot
Banana Connectors
BNC Connectors
LM741

CamScanner

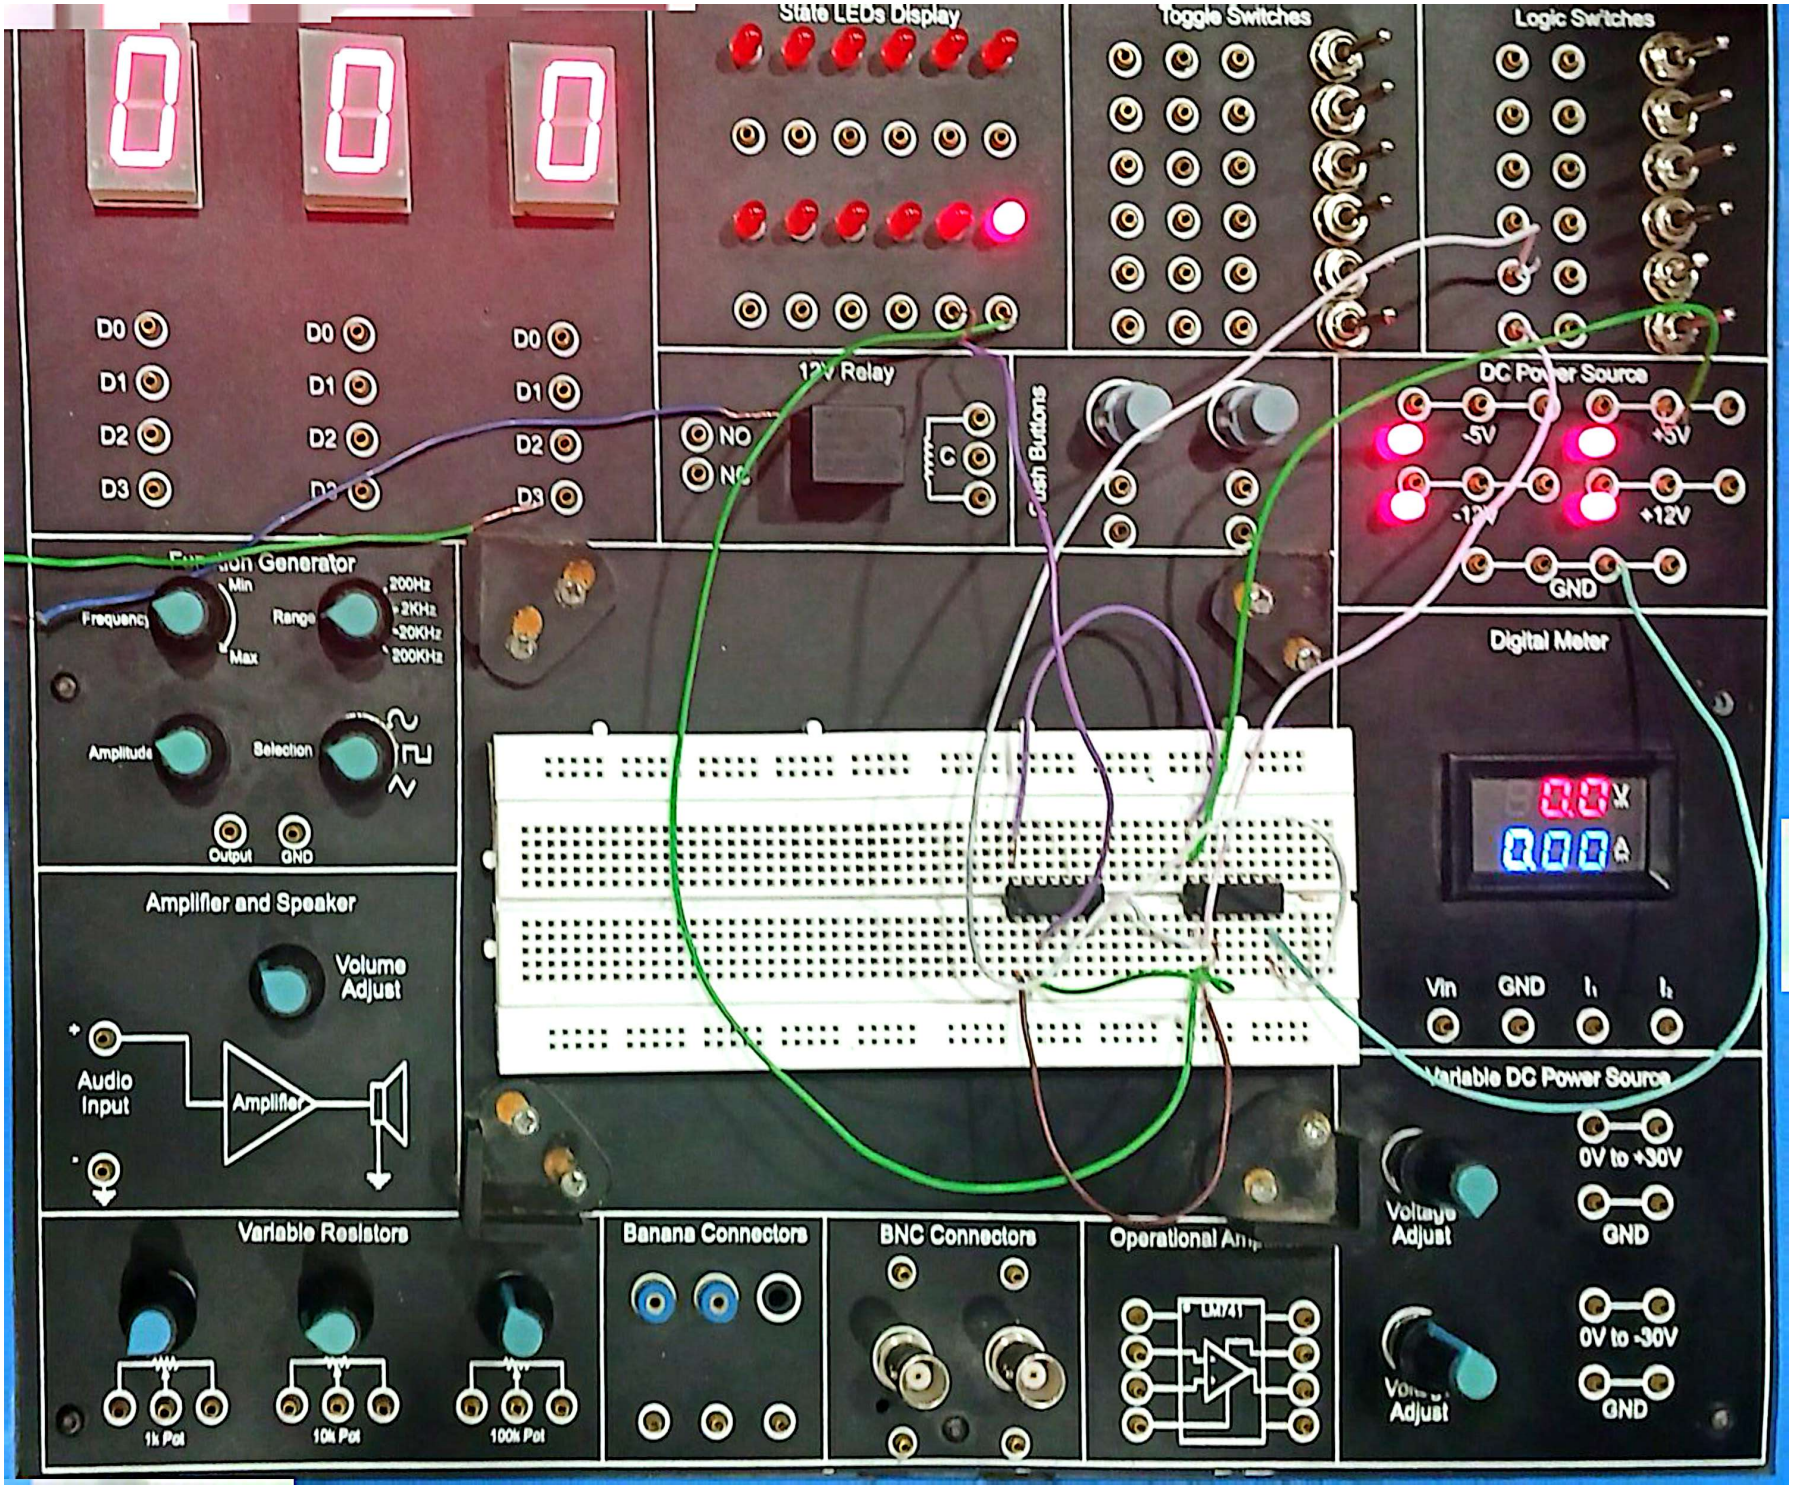
State LEDs Display
Toggle Switches
Logic Switches
D0
D1
D2
D3
12V Relay
NO
NC
C
Push Buttons
DC Power Source
-5V
+5V
-12V
+12V
GND
Function Generator
Frequency
Min
Max
Range
200Hz
2KHz
20KHz
200KHz
Amplitude
Selection
Output
GND
Digital Meter
Vin
GND
Amplifier and Speaker
Volume Adjust
Audio Input
Amplifier
Variable DC Power Source
0V to +30V
GND
Voltage Adjust
0V to -30V
Variable Resistors
1k Pot
10k Pot
100k Pot
Banana Connectors
BNC Connectors
Operational Amp
LM741

CamScanner

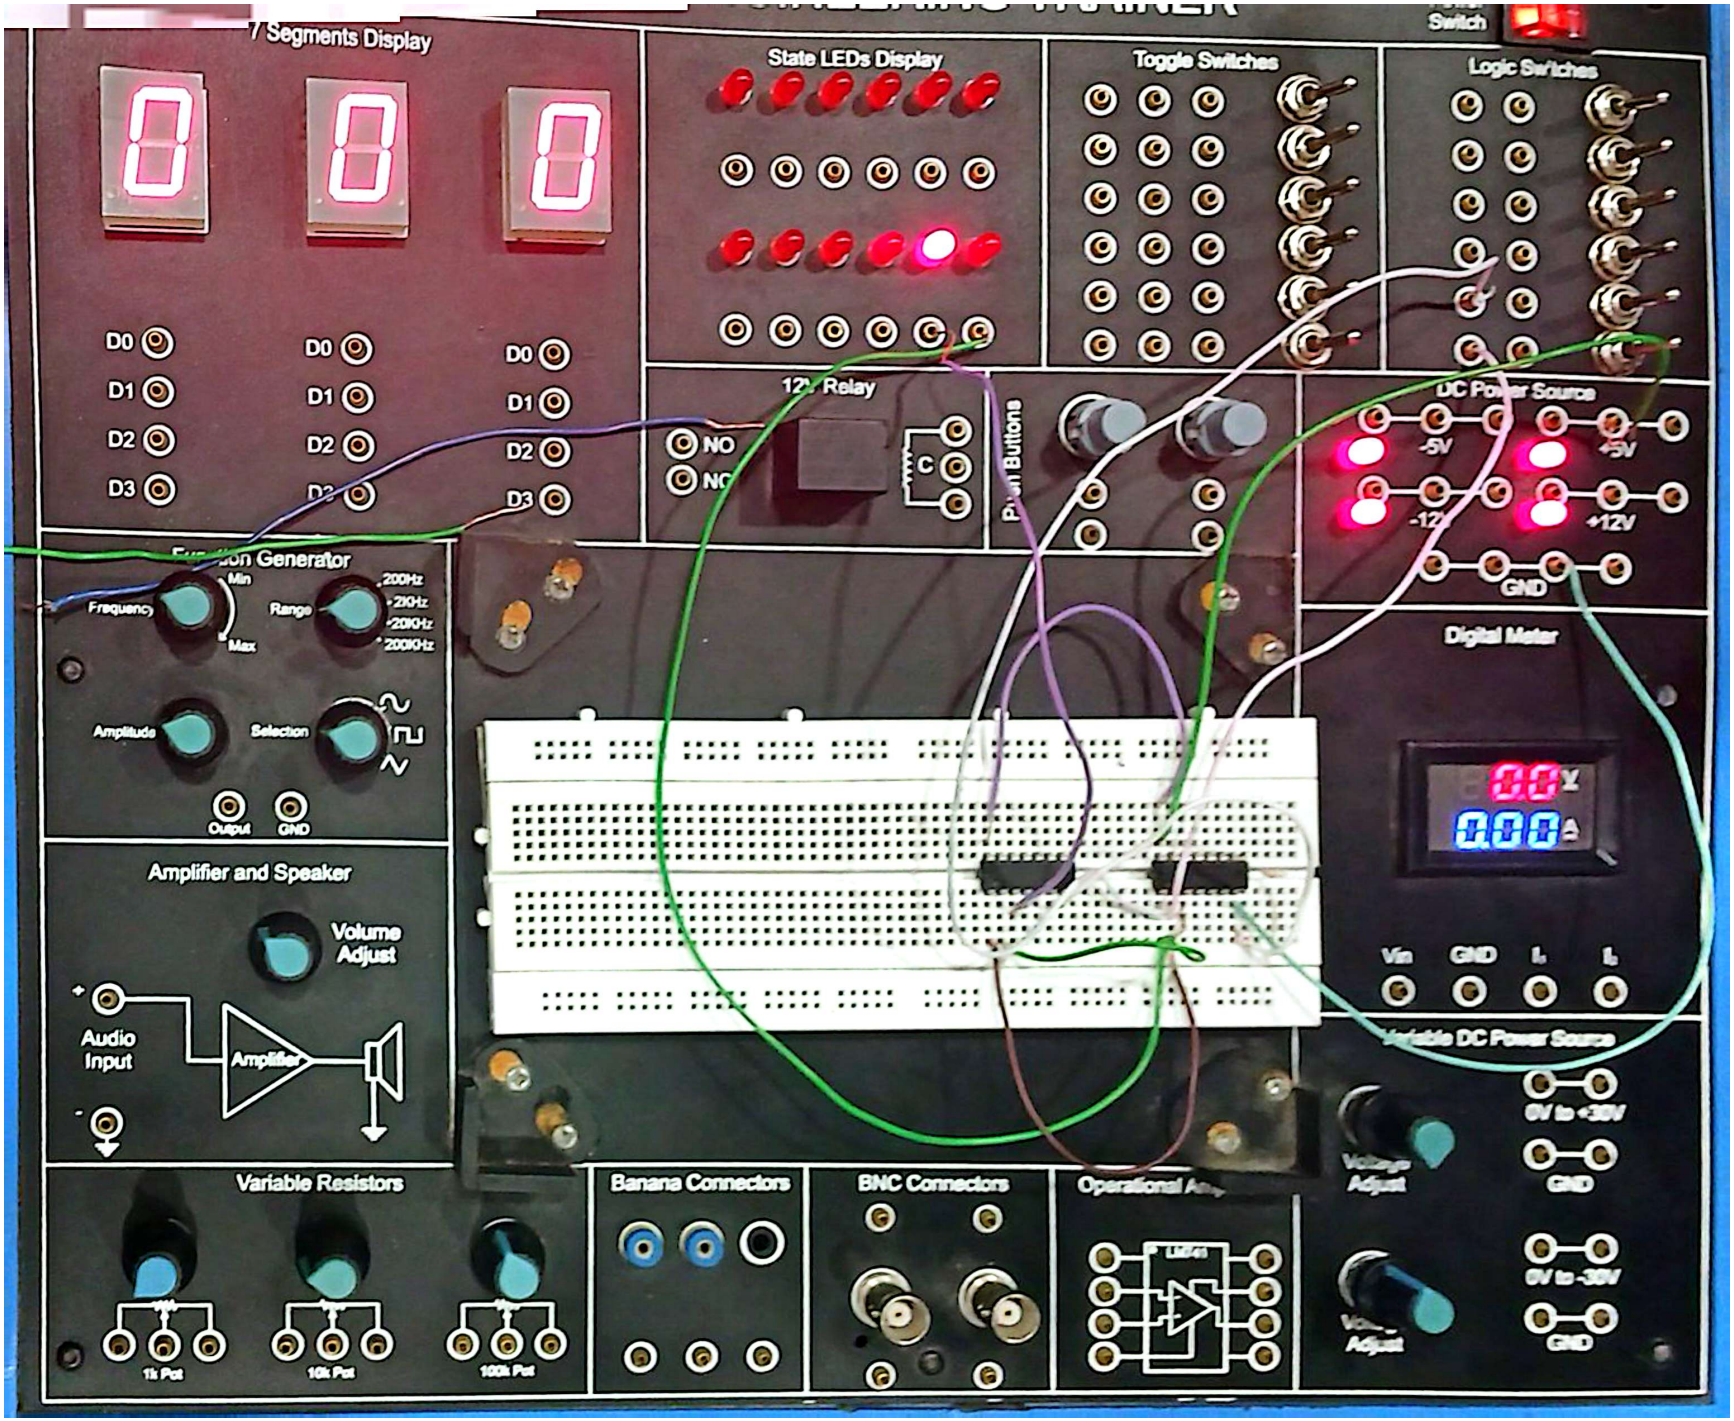
7 Segments Display
D0
D1
D2
D3
State LEDs Display
Toggle Switches
Logic Switches
Switch
12V Relay
NO
NC
C
Push Buttons
DC Power Source
-5V
+5V
-12V
+12V
GND
Function Generator
Frequency
Min
Max
Range
200Hz
2KHz
20KHz
200KHz
Amplitude
Selection
Output
GND
Digital Meter
0.0V
0.00A
Vin
GND
Amplifier and Speaker
Volume Adjust
Audio Input
Amplifier
Variable DC Power Source
0V to +30V
GND
0V to -30V
Variable Resistors
1k Pot
10k Pot
100k Pot
Banana Connectors
BNC Connectors
Operational Amp
LM741

CamScanner

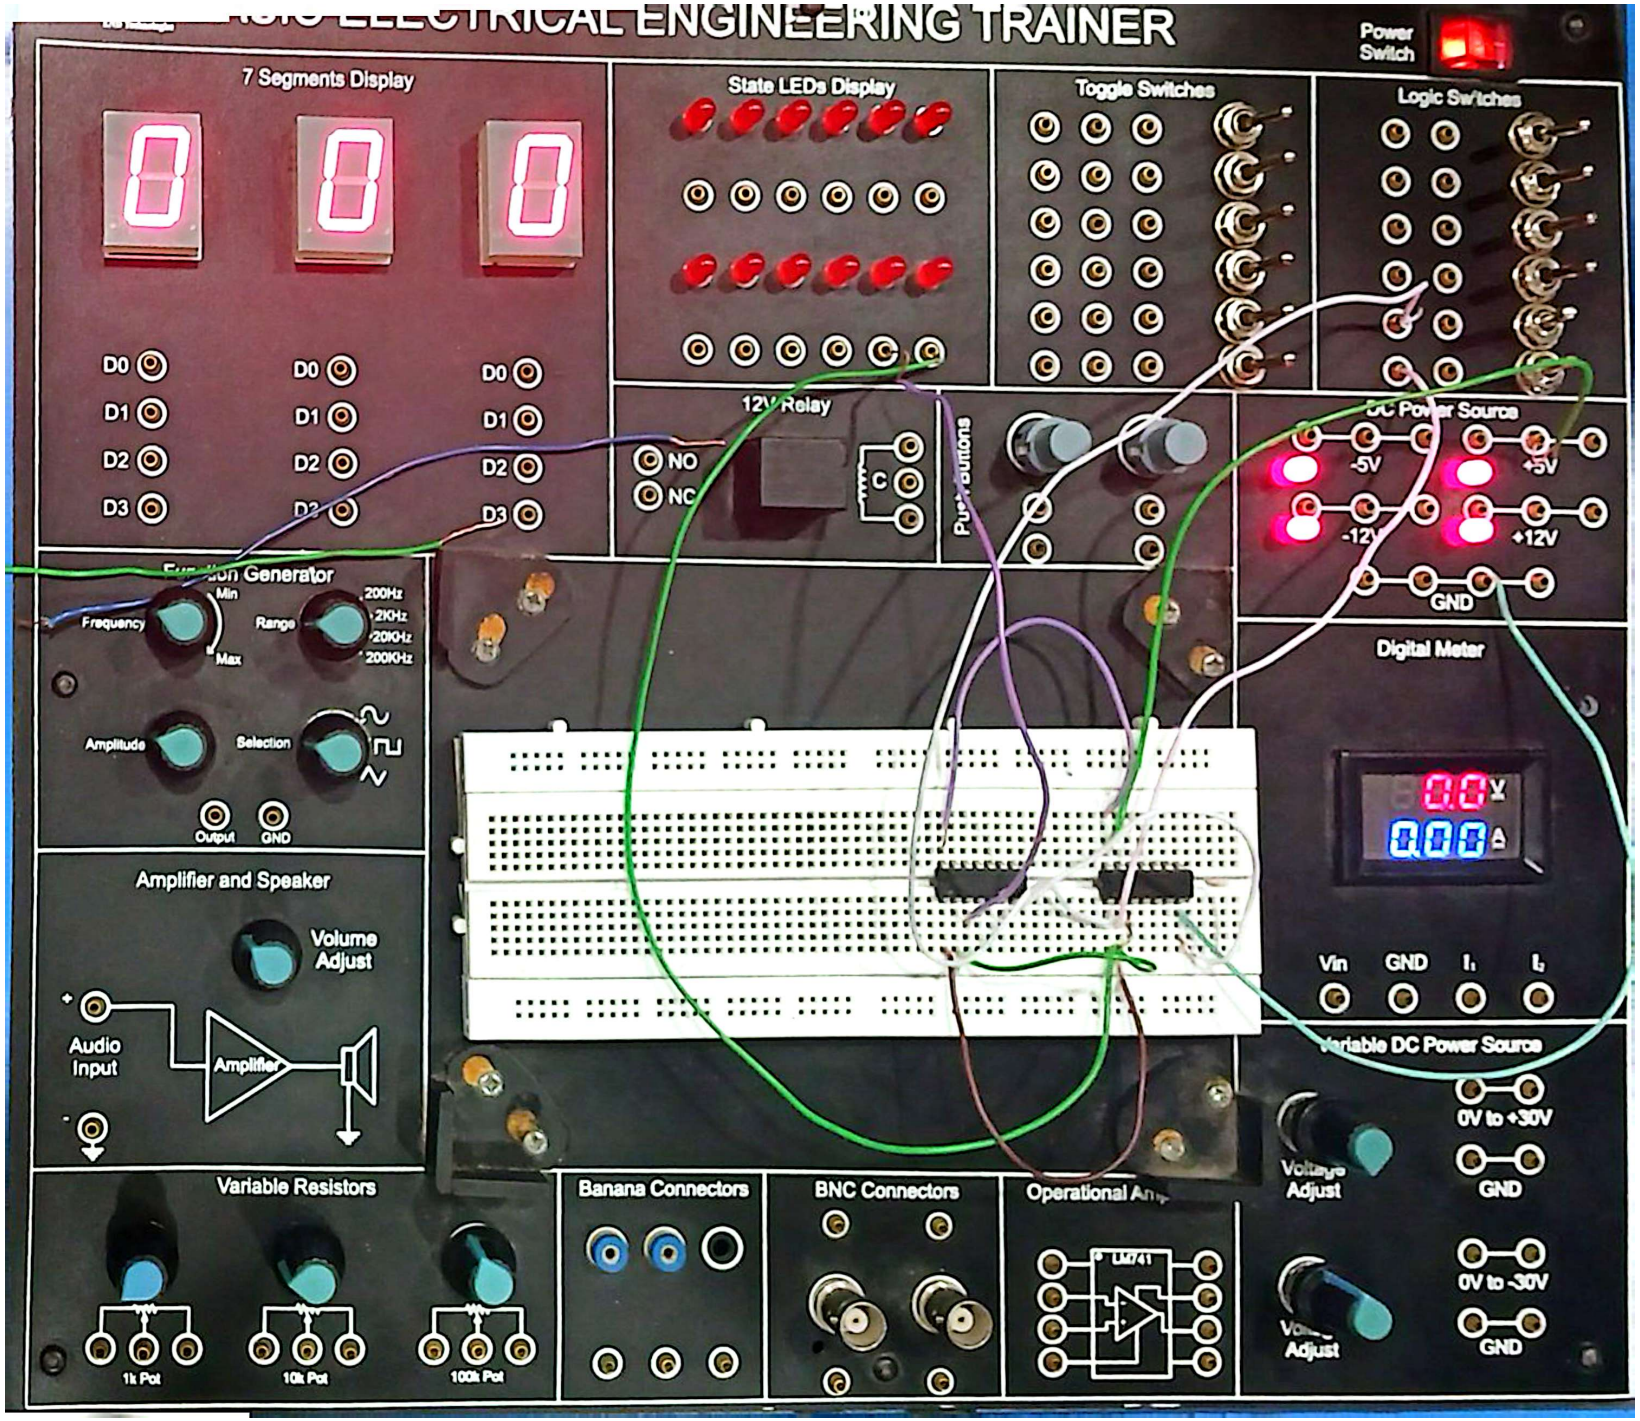
ELECTRICAL ENGINEERING TRAINER
Power Switch
7 Segments Display
D0
D1
D2
D3
State LEDs Display
Toggle Switches
Logic Switches
12V Relay
NO
NC
C
Push Buttons
DC Power Source
-5V
+5V
-12V
+12V
GND
Frequency
Min
Max
Range
200Hz
2KHz
20KHz
200KHz
Amplitude
Selection
Output
GND
Digital Meter
Vin
GND
Amplifier and Speaker
Volume Adjust
Audio Input
Amplifier
Variable DC Power Source
0V to +30V
GND
Voltage Adjust
0V to -30V
Variable Resistors
1k Pot
10k Pot
100k Pot
Banana Connectors
BNC Connectors
Operational Amp
LM741

CamScanner