




## The University of Azad Jammu and Kashmir, Muzaffarabad

|                 |                       |
|-----------------|-----------------------|
| Name            | Kamal Ali Akmal       |
| Course Name     | Computer Networks     |
| Submitted to    | Engr. Dr. Asma Jayaid |
| Semester        | 4th                   |
| Session         | 2024-2028             |
| Roll No         | 2024-SE-38            |
| Lab No          | 05                    |
| Submission date | 02 April 2026         |

## Create and Test a Two LAN's in Cisco Packet Tracer

**Step 01:** Open Cisco Packet Tracer and take two switches and six PCs. Click on the PCs. Go to the Desktop tab. Click on IP Configuration. Enter the IP Addresses and Subnet Masks to all PCs as instructed.

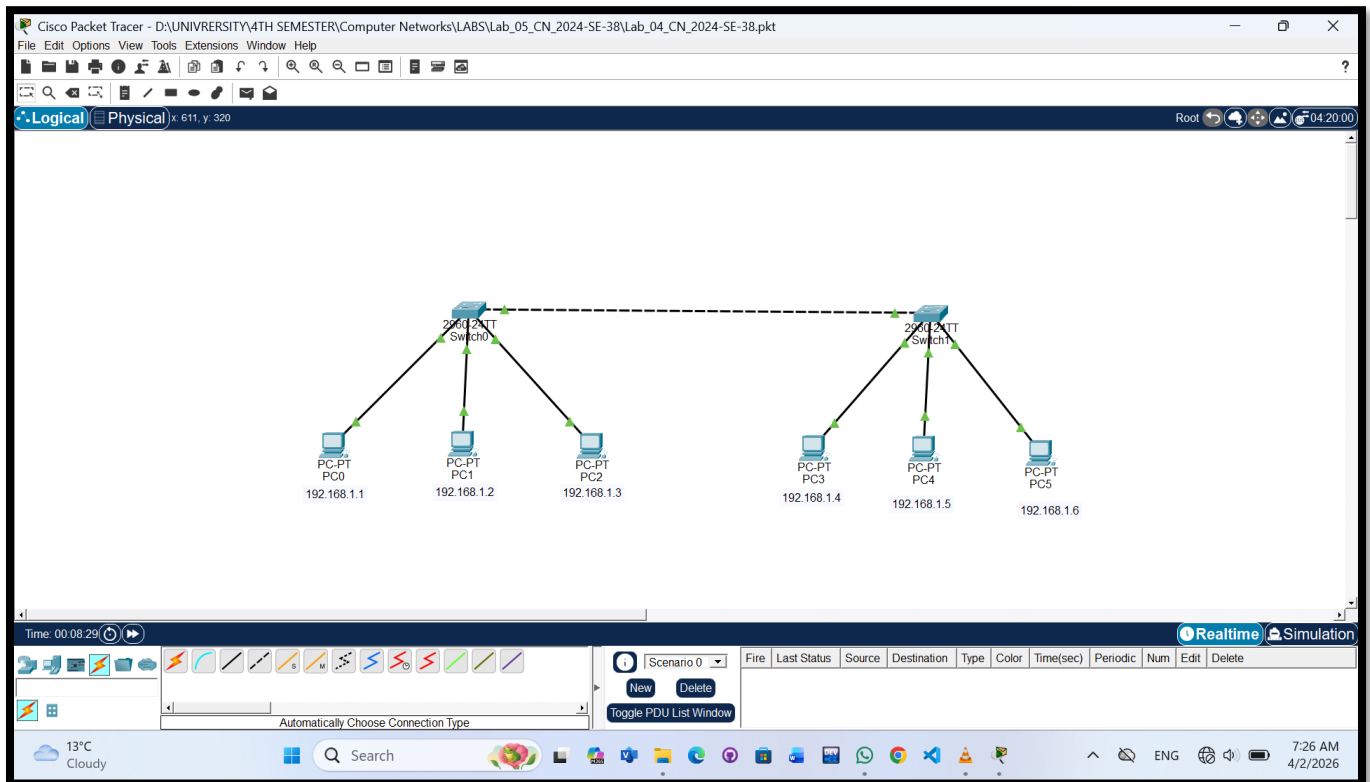

The screenshot shows the configuration window for PC0. The 'Desktop' tab is selected, and the 'IP Configuration' window is open. The 'Static' option is selected for IP Configuration. The IPv4 Address is 192.168.1.1, Subnet Mask is 255.255.255.0, Default Gateway is 0.0.0.0, and DNS Server is 0.0.0.0. The IPv6 Configuration section is also visible with 'Static' selected and IPv6 Address set to FE80::2D0:D3FF:FE39:9ED4.

**Step 02:** *Packet has been given to each PC and start simulation.*

