




The University of Azad Jammu and Kashmir, Muzaffarabad


Name	Kamal Ali Akmal
Course Name	Computer Networks
Submitted to	Engr. Dr. Asma Jayaid
Semester	4th
Session	2024-2028
Roll No	2024-SE-38
Lab No	04
Submission date	28 March 2026

Create and Test a Simple LAN in Cisco Packet Tracer

Step 01: *Open Cisco Packet Tracer and take one switch and four PCs.*

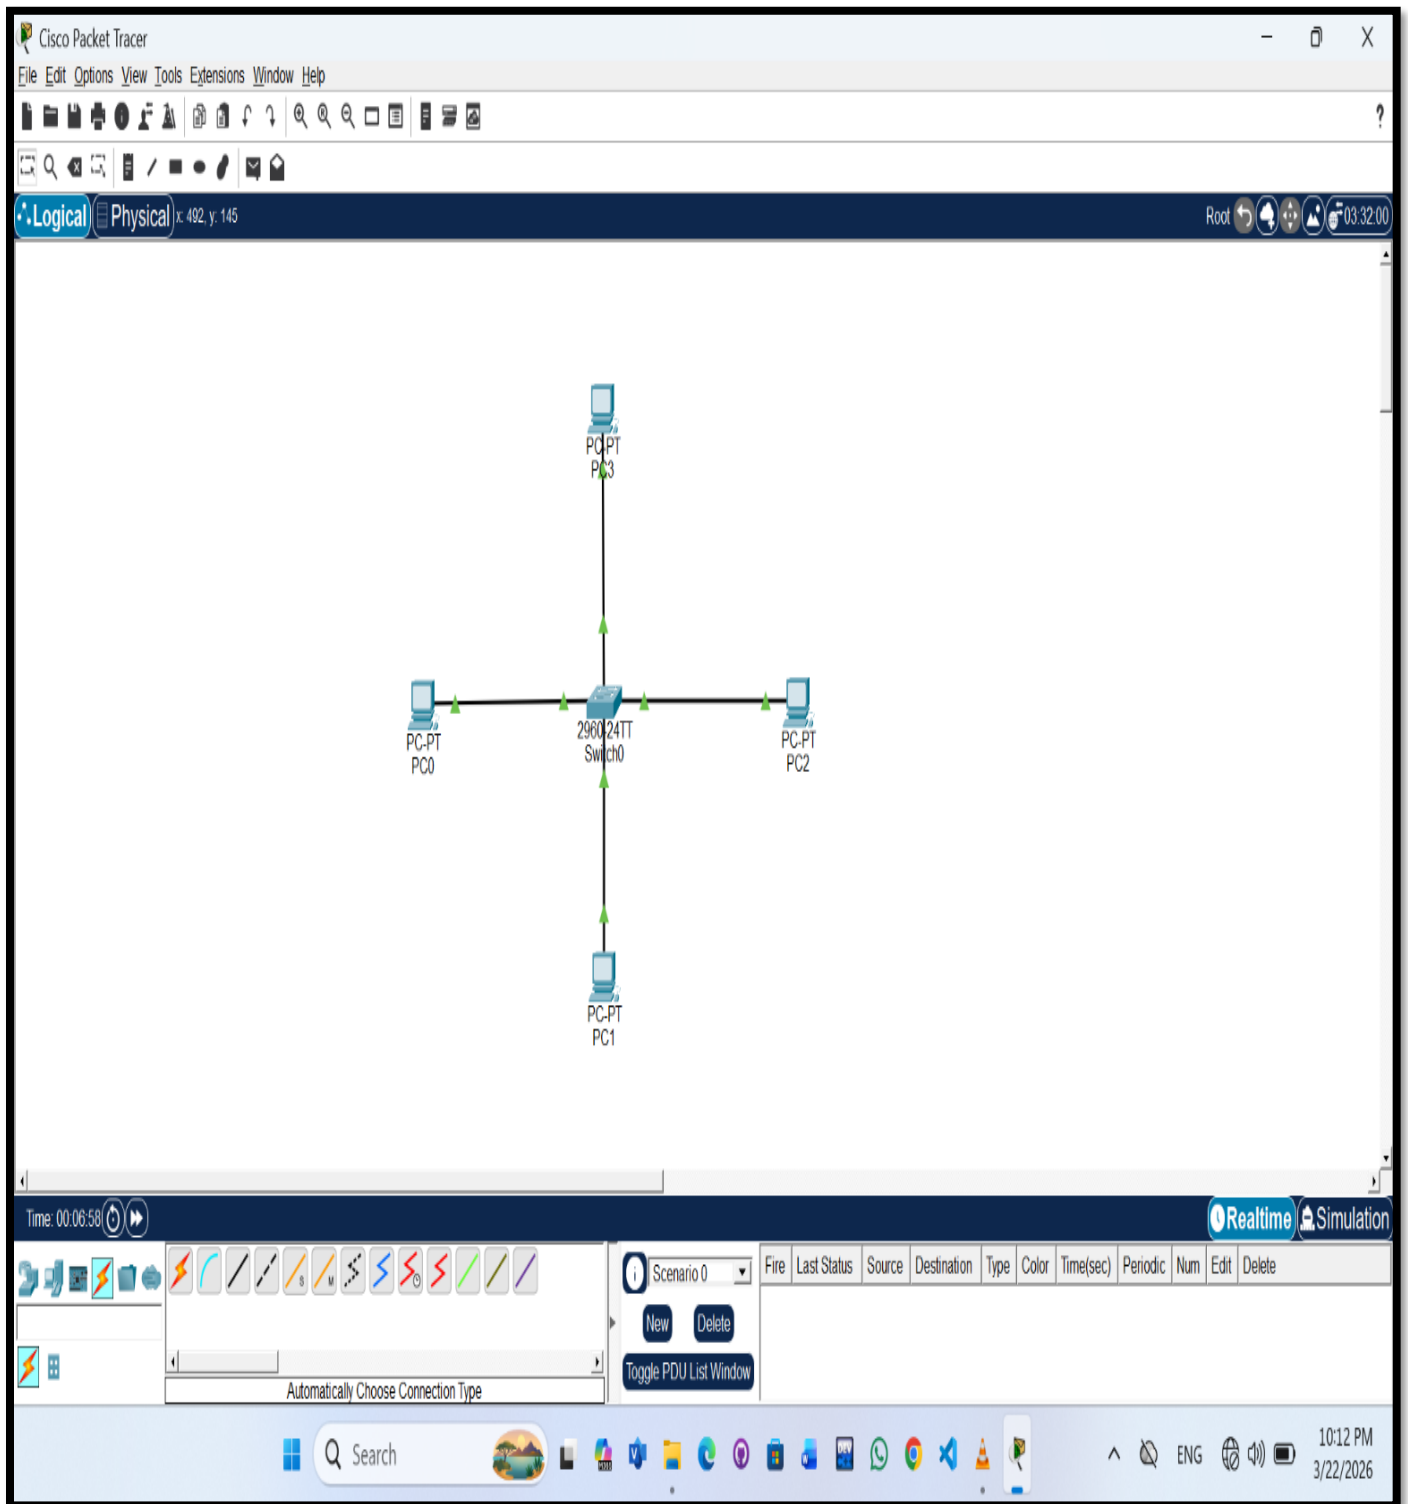


Step 02: Click on the PC. Go to the Desktop tab. Click on IP Configuration. Enter the IP Address and Subnet Mask as instructed.

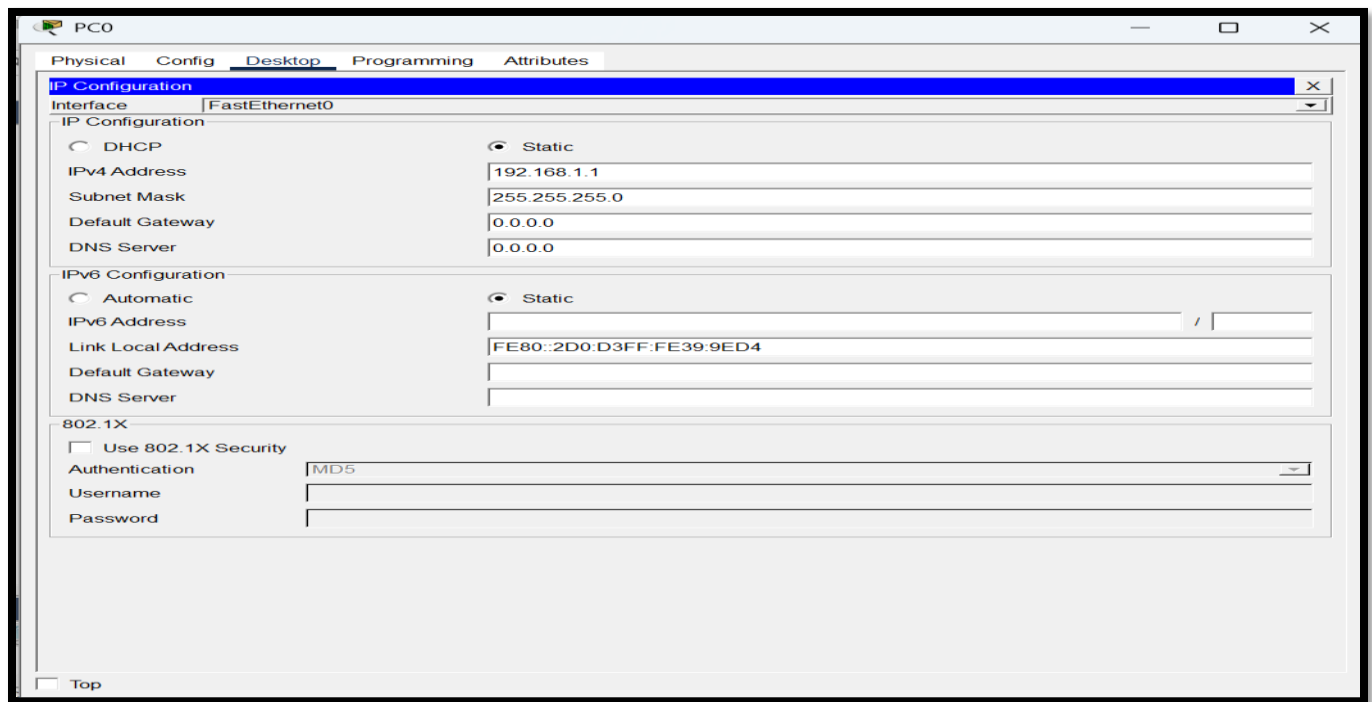

The screenshot shows the configuration window for PC0. The 'Desktop' tab is selected. Under 'IP Configuration', the 'Static' radio button is chosen. The IPv4 Address is set to 192.168.1.1, Subnet Mask to 255.255.255.0, Default Gateway to 0.0.0.0, and DNS Server to 0.0.0.0. The IPv6 Configuration section has the 'Static' radio button selected, with a Link Local Address of FE80::2D0:D3FF:FE39:9ED4. The 802.1X section has 'Use 802.1X Security' unchecked, Authentication set to MD5, and empty fields for Username and Password.

IP Configuration	
Interface: FastEthernet0	
IP Configuration	
☐ DHCP	☒ Static
IPv4 Address	192.168.1.1
Subnet Mask	255.255.255.0
Default Gateway	0.0.0.0
DNS Server	0.0.0.0
IPv6 Configuration	
☐ Automatic	☒ Static
IPv6 Address	
Link Local Address	FE80::2D0:D3FF:FE39:9ED4
Default Gateway	
DNS Server	
802.1X	
☐ Use 802.1X Security	
Authentication	MD5
Username	
Password	

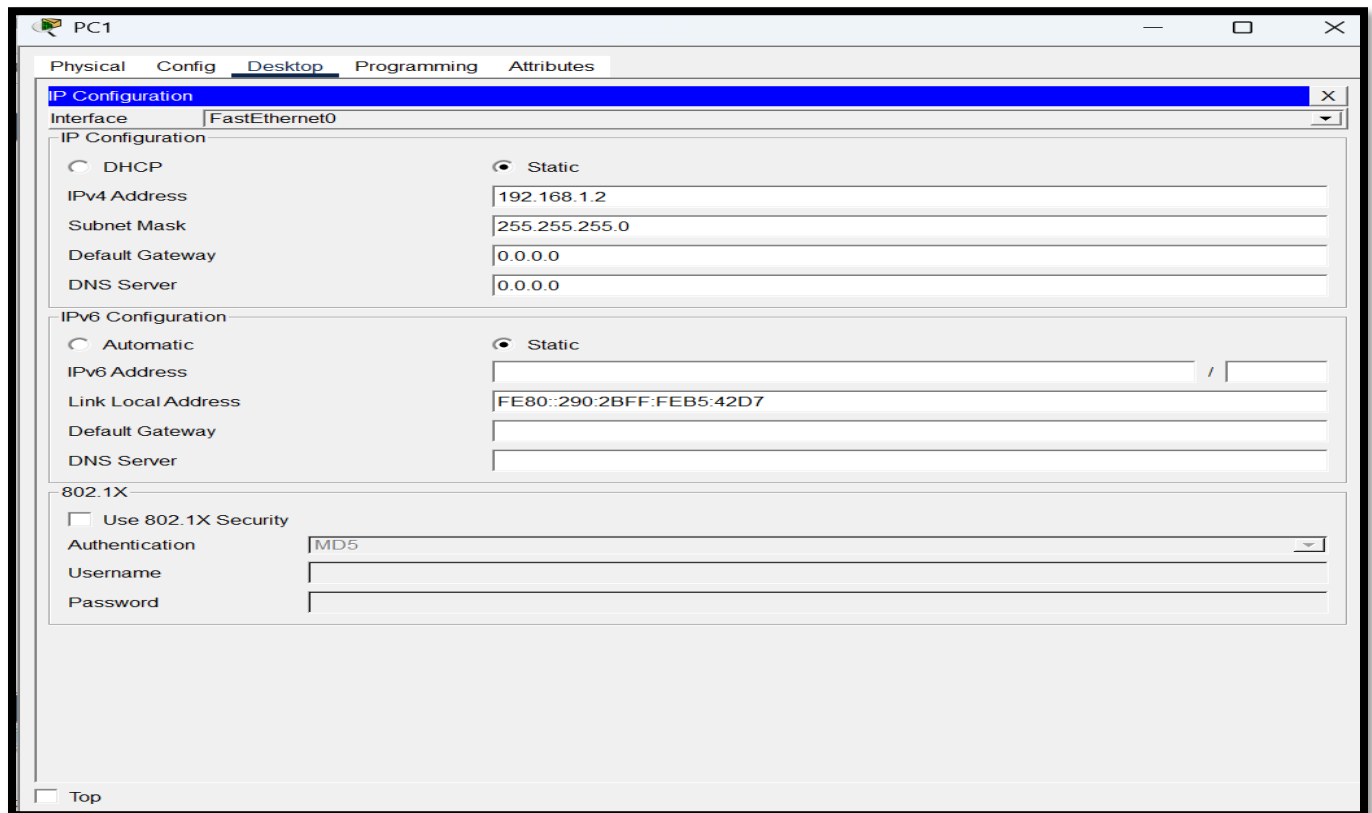

The screenshot shows the configuration window for PC1. The 'Desktop' tab is selected. Under 'IP Configuration', the 'Static' radio button is chosen. The IPv4 Address is set to 192.168.1.2, Subnet Mask to 255.255.255.0, Default Gateway to 0.0.0.0, and DNS Server to 0.0.0.0. The IPv6 Configuration section has the 'Static' radio button selected, with a Link Local Address of FE80::290:2BFF:FEB5:42D7. The 802.1X section has 'Use 802.1X Security' unchecked, Authentication set to MD5, and empty fields for Username and Password.

IP Configuration	
Interface: FastEthernet0	
IP Configuration	
☐ DHCP	☒ Static
IPv4 Address	192.168.1.2
Subnet Mask	255.255.255.0
Default Gateway	0.0.0.0
DNS Server	0.0.0.0
IPv6 Configuration	
☐ Automatic	☒ Static
IPv6 Address	
Link Local Address	FE80::290:2BFF:FEB5:42D7
Default Gateway	
DNS Server	
802.1X	
☐ Use 802.1X Security	
Authentication	MD5
Username	
Password	

Step 03: *Packet has been given to each PC and start simulation.*

The screenshot shows the Cisco Packet Tracer interface. The network topology consists of a central 2960 24TT Switch0 connected to three PCs (PC0, PC1, PC2). The simulation is running, and the Event List shows ICMP packets being sent from PC0 to PC1 and PC2.

Event List:

Vis	Time(sec)	Last Device
0.000	--	--
0.000	--	--
0.001	PC0	--
0.001	PC2	--
0.002	Switch0	--
0.002	Switch0	--

Simulation Panel:

Reset Simulation ☒ Constant Delay Captured to: 0.002 s

Play Controls: [Play] [Pause] [Stop]

Event List Filters - Visible Events: ACL Filter, ARP, BGP, Bluetooth, CAPWAP, CDP, DHCP, DHCPv6, DNS, DTP, EAPOL, EIGRP, EIGRPv6, FTP, H.323, HSRP, HSRPv6, HTTP, HTTPS, ICMP, ICMPv6, IEC, IPsec, ISAKMP, IoT, IoT TCP, LACP, LLDP, MODBUS, Meraki, NDP, NETFLOW, NTP, OSPF, OSPFv6, PaGP, POP3, PPP, PPPoE, PTP, Profinet, RADIUS, REP, RIP, RIPng, RTP, SCCP, SMTP, SNMP, SSH, STP, SYSLOG, TACACS, TCP, TFTP, Telnet, UDP, USB, VTP

Event List Table:

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
In Progress		PC0	PC1	ICMP		0.000	N	0	(edit)	(delete)
In Progress		PC2	PC3	ICMP		0.000	N	1	(edit)	(delete)

The screenshot shows the Cisco Packet Tracer interface. The network topology is the same as the previous screenshot. The simulation is running, and the Event List shows ICMP packets being sent from PC0 to PC1 and PC2. The status of the packets is now 'Successful'.

Event List:

Vis	Time(sec)	Last Device
1.947	Switch0	--
3.946	--	--
3.947	Switch0	--
3.947	Switch0	--
3.947	Switch0	--
3.947	Switch0	--
3.947	Switch0	--
5.946	--	--
5.947	Switch0	--
5.947	Switch0	--
5.947	Switch0	--
5.947	Switch0	--

Simulation Panel:

Reset Simulation ☒ Constant Delay Captured to: 5.947 s

Play Controls: [Play] [Pause] [Stop]

Event List Filters - Visible Events: ACL Filter, ARP, BGP, Bluetooth, CAPWAP, CDP, DHCP, DHCPv6, DNS, DTP, EAPOL, EIGRP, EIGRPv6, FTP, H.323, HSRP, HSRPv6, HTTP, HTTPS, ICMP, ICMPv6, IEC, IPsec, ISAKMP, IoT, IoT TCP, LACP, LLDP, MODBUS, Meraki, NDP, NETFLOW, NTP, OSPF, OSPFv6, PaGP, POP3, PPP, PPPoE, PTP, Profinet, RADIUS, REP, RIP, RIPng, RTP, SCCP, SMTP, SNMP, SSH, STP, SYSLOG, TACACS, TCP, TFTP, Telnet, UDP, USB, VTP

Event List Table:

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
Successful		PC0	PC1	ICMP		0.000	N	0	(edit)	(delete)
Successful		PC2	PC3	ICMP		0.000	N	1	(edit)	(delete)