Liquid Line 40 Compact W5 | Wall




EN LED wall mounted luminaire. Direct-indirect light distribution. Luminaire body with soft corners made of aluminium, crafted in one piece with no visible seams at the ends. Surface white, silver, graphite, black or champagne coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Satin opal diffuser for general lighting with maximum transmittance and uniformity. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI). Colour temperature 2200K, 2700K, 3000K, 4000K or 6500K. Binning ≤ MacAdam 3. Colour rendering CRI>80.

DE LED-Wandanbauleuchte. Direkt-indirektstrahlend. Leuchtenkörper mit feinen Radien aus Aluminium gefertigt aus einem Guss ohne sichtbare Nahtstellen an den Stirnseiten. Oberfläche weiß, silber, graphit, schwarz oder champagnerfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Satinierter Opaldiffusor für Allgemeinbeleuchtung mit max. Transmissionsgrad und homogener Lichtpunktauflösung. Konverter in Leuchtengehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI). Farbtemperatur 2200K, 2700K, 3000K, 4000K oder 6500K. Binning initial ≤ MacAdam 3. Farbwiedergabe CRI>80.

QW5OWE-830H-L139


Product Family	**Q**: Liquid Line
Type	**W5**: Direct-Indirect
Optical System	**O**: Opal Diffuser
Surface Finish	**W**: Snow White, **V**: Ivory White, **S**: Radiant Silver, **A**: Satin Silver, **F**: Anodic Silver, **U**: Urban Graphite, **D**: Anodic Black, **B**: Jet Black, **H**: Anodic Champagne, **K**: Satin Copper, **X**: Satin Bronze, **M**: Satin Cloud, **R**: Special Surface (please specify)
Control Gear	**E**: On/Off, **L**: DALI, **H**: Touch-Dim
Colour Rendering	**8**: CRI>80, **9**: CRI>90, **F**: Full Spectrum [except 2200K]
Colour Temperature	**22**: 2200K, **27**: 2700K, **30**: 3000K, **35**: 3500K, **40**: 4000K, **65**: 6500K
Power	**M**: Medium Power, **H**: High Power
Size	**L139**

Opal Diffuser | Direct-Indirect



L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
139	1200 lm/9 W	1960 lm/15 W

Lumen values: luminaire luminous flux, 840: 4000 K, CRI>80. Other configurations on request.

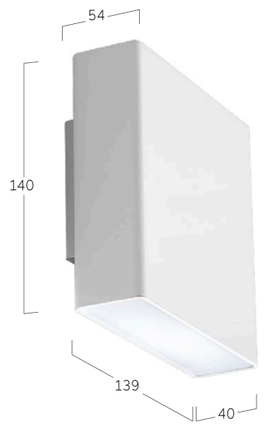

W Snow White



A Satin Silver



U Urban Graphite



B Jet Black



K Satin Copper



H Anodic Champagne