
Liquid Line 40 CX | 3-Phase Track

Variant code **QCX-L1461-E-L**



TECHNICAL DATA

Luminaire luminous flux	3080 lm
Power consumption	19 W
Luminous efficacy	162 lm/W
Colour temperature	4000 K
CRI	> 80
Reference measurement conditions	840: 4000 K, CRI>80
Optical system	Lens Louvre (L)
Light distribution	Direct
Power class	Low Power [only Lens] (E)
Size	L1461

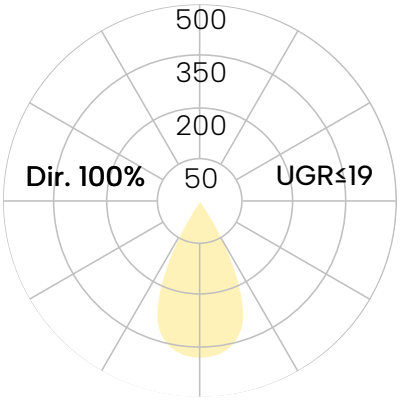

Lens Louvre | Direct

Curve image from the catalogue — not an LDT measurement



Dimension drawing

ORDERING CODE

Q CX L - - - E - L1461 - - -

Product Family	**Q**: Liquid Line
Type	**CX**: 3-Phase Track
Optical System	**L**: Lens Louvre
Surface Finish	**W**: Snow White, **V**: Ivory White, **S**: Radiant Silver, **A**: Satin Silver, **F**: Anodic Silver, **U**: Urban Graphite, **D**: Anodic Black, **B**: Jet Black, **H**: Anodic Champagne, **K**: Satin Copper, **X**: Satin Bronze, **M**: Satin Cloud, **R**: Special Surface (please specify)
Control Gear	**E**: On/Off, **L**: DALI
Colour Rendering	**8**: CRI>80, **9**: CRI>90, **F**: Full Spectrum [except 2200K]
Colour Temperature	**22**: 2200K, **27**: 2700K, **30**: 3000K, **35**: 3500K, **40**: 4000K, **65**: 6500K
Power	**E**: Low Power [only Lens]
Size	**L1461**
Adaptor	**W**: In-House Electronic [white], **B**: In-House Electronic [black]
Lens Louvre	**W**: Snow White, **V**: Ivory White, **A**: Satin Silver, **F**: Anodic Silver, **D**: Anodic Black, **K**: Satin Copper, **G**: Satin Gold, **J**: Satin Pale Gold, **L**: Satin Cipria, **M**: Satin Cloud, **R**: Special Surface (please specify)