
Liquid Line 40 QX/FX | Recessed

Variant code **QFX-M-C**



TECHNICAL DATA

Luminaire luminous flux	1900 lm
Power consumption	15.2 W
Luminous efficacy	125 lm/W
Colour temperature	4000 K
CRI	> 80
Reference measurement conditions	840: 4000 K, CRI>80
Optical system	Opal Flex Diffuser (C)
Light distribution	Direct
Power class	Medium Power (M)
Size	per metre

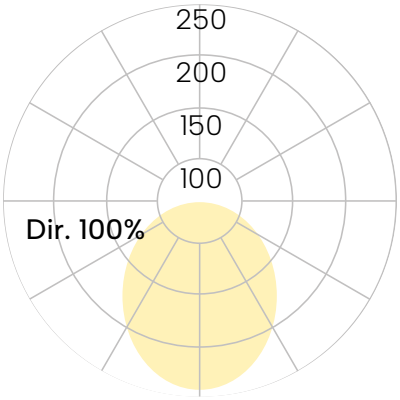

Opal Flex Diffuser | Direct

Curve image from the catalogue — not an LDT measurement

Ordered according to a project drawing approved by the client.