

# Liquid Line 40 GX/PX | Suspended

Variant code **QGX-M-C**

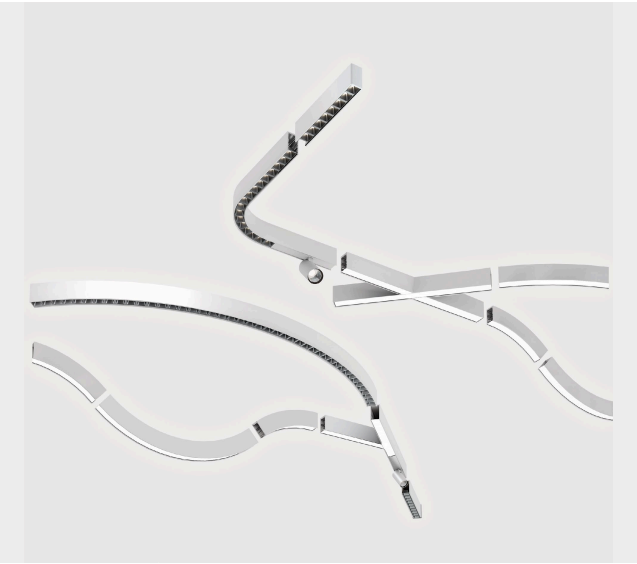

## TECHNICAL DATA

| | |
|---|---|
| Luminaire luminous flux | 1900 lm |
| Power consumption | 15.2 W |
| Luminous efficacy | 125 lm/W |
| Colour temperature | 4000 K |
| CRI | > 80 |
| Reference measurement conditions | 840: 4000 K, CRI>80 |
| Optical system | Opal Flex Diffuser (C) |
| Light distribution | Direct |
| Power class | Medium Power (M) |
| Size | per metre |

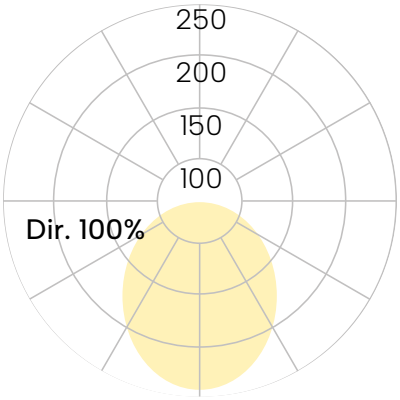


**Opal Flex Diffuser | Direct**

Curve image from the catalogue — not an LDT measurement

Ordered according to a project drawing approved by the client.