

# Liquid Line 60 G4/P4 | Suspended

Variant code **QP4-E-O**

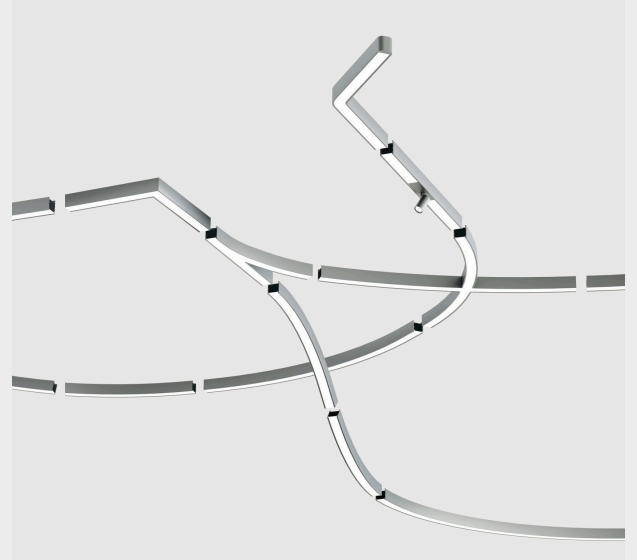

## TECHNICAL DATA

| | |
|---|---|
| Luminaire luminous flux | 3660 lm |
| Power consumption | 22.8 W |
| Luminous efficacy | 161 lm/W |
| Colour temperature | 4000 K |
| CRI | > 80 |
| Reference measurement conditions | 840: 4000 K, CRI>80 |
| Optical system | Opal Diffuser (O) |
| Light distribution | Direct-Indirect |
| Power class | Low Power (E) |
| Size | per metre |

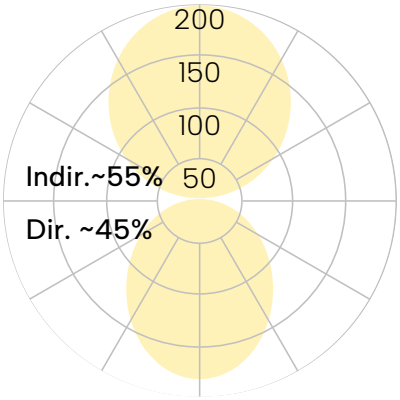


**Opal Diffuser | Direct-Indirect**

Curve image from the catalogue — not an LDT measurement

Ordered according to a project drawing approved by the client.