

Liquid Line 60 G4/P4 | Suspended

Variant code **QP4-M-O**

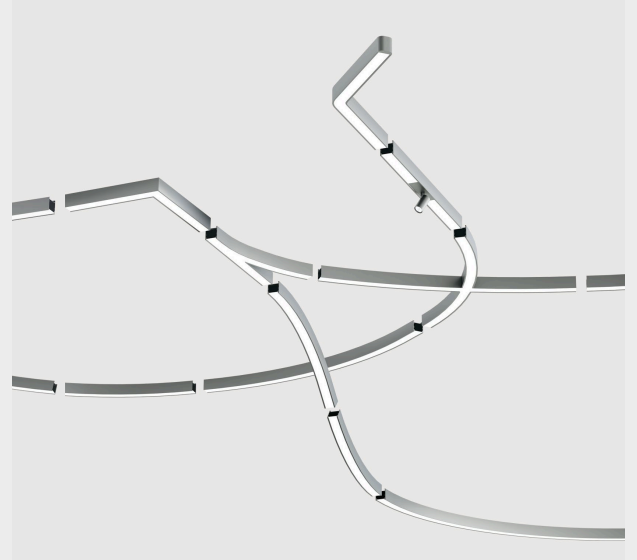

TECHNICAL DATA

Luminaire luminous flux	5230 lm
Power consumption	32.5 W
Luminous efficacy	161 lm/W
Colour temperature	4000 K
CRI	> 80
Reference measurement conditions	840: 4000 K, CRI>80
Optical system	Opal Diffuser (O)
Light distribution	Direct-Indirect
Power class	Medium Power (M)
Size	per metre

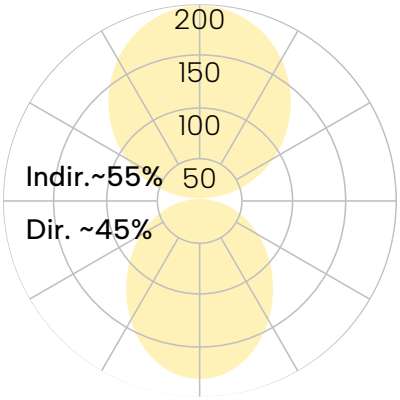

Opal Diffuser | Direct-Indirect

Curve image from the catalogue — not an LDT measurement

Ordered according to a project drawing approved by the client.