Liquid Line Compact G5/P5 | Suspended


Variant code **QP5-L139-M-L**



TECHNICAL DATA


Luminaire luminous flux	820 lm
Power consumption	6 W
Luminous efficacy	137 lm/W
Colour temperature	4000 K
CRI	> 80
Reference measurement conditions	840: 4000 K, CRI>80
Optical system	Lens Louvre (L)
Light distribution	Direct-Indirect
Power class	Medium Power (M)
Size	L139

IP20 CE UKCA

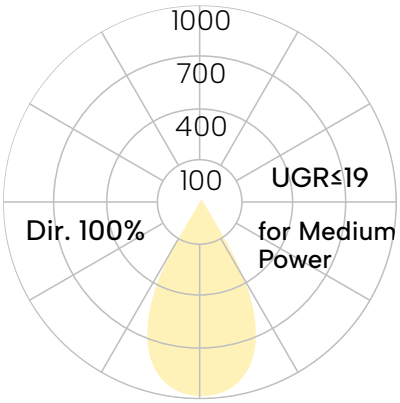

Lens Louvre | Direct-Indirect

Curve image from the catalogue — not an LDT measurement



Dimension drawing

ORDERING CODE

QP5L---M-L139---

Product Family	**Q**: Liquid Line
Type	**P5**: Direct-indirect
Optical System	**L**: Lens Louvre
Surface Finish	**W**: Snow White, **V**: Ivory White, **S**: Radiant Silver, **A**: Satin Silver, **F**: Anodic Silver, **U**: Urban Graphite, **D**: Anodic Black, **B**: Jet Black, **H**: Anodic Champagne, **K**: Satin Copper, **X**: Satin Bronze, **M**: Satin Cloud, **R**: Special Surface (please specify)
Control Gear	**E**: On/Off, **L**: DALI, **H**: Touch-Dim
Colour Rendering	**8**: CRI>80, **9**: CRI>90, **F**: Full Spectrum [except 2200K]
Colour Temperature	**22**: 2200K, **27**: 2700K, **30**: 3000K, **35**: 3500K, **40**: 4000K, **65**: 6500K
Power	**M**: Medium Power
Size	**L139**
Suspension	**A**: Single Cord Suspension
Lens Louvre	**W**: Snow White, **V**: Ivory White, **A**: Satin Silver, **F**: Anodic Silver, **D**: Anodic Black, **K**: Satin Copper, **G**: Satin Gold, **J**: Satin Pale Gold, **L**: Satin Cipria, **M**: Satin Cloud, **R**: Special Surface (please specify)