

Liquid Line 40 GX/PX | Suspended

Variant code **QPX-M-C**

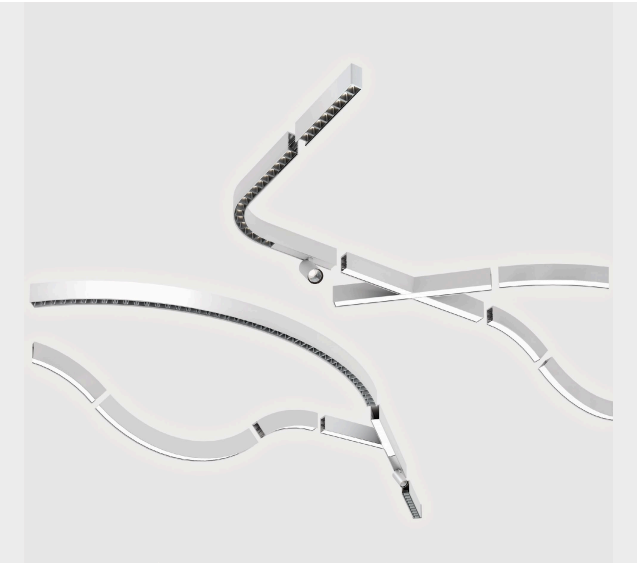

TECHNICAL DATA

Luminaire luminous flux	4420 lm
Power consumption	29.3 W
Luminous efficacy	151 lm/W
Colour temperature	4000 K
CRI	> 80
Reference measurement conditions	840: 4000 K, CRI>80
Optical system	Opal Flex Diffuser (C)
Light distribution	Direct-Indirect
Power class	Medium Power (M)
Size	per metre

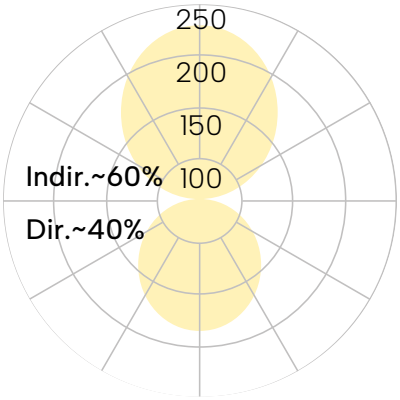

Opal Flex Diffuser | Direct-Indirect

Curve image from the catalogue — not an LDT measurement

Ordered according to a project drawing approved by the client.