
Liquid Line 40 TY | Table

Variant code **QTY-L936-M-L**



TECHNICAL DATA

Luminaire luminous flux	2500 lm
Power consumption	16 W
Luminous efficacy	156 lm/W
Colour temperature	4000 K
CRI	> 80
Reference measurement conditions	840: 4000 K, CRI>80
Optical system	Lens Louvre (L)
Light distribution	Direct
Power class	Medium Power (M)
Size	L936

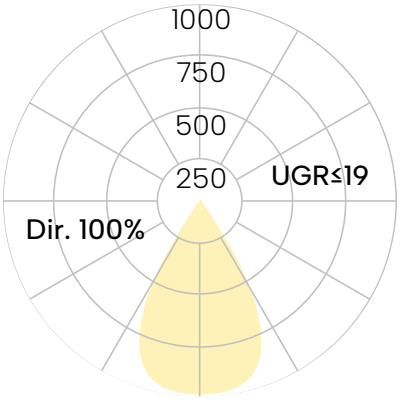

Lens Louvre | Direct

Curve image from the catalogue — not an LDT measurement

ORDERING CODE

Q TY L - - - M - L936 - - -

Product Family	**Q**: Liquid Line
Type	**TY**: Direct Only
Optical System	**L**: Lens Louvre
Surface Finish	**W**: Snow White, **V**: Ivory White, **S**: Radiant Silver, **A**: Satin Silver, **F**: Anodic Silver, **U**: Urban Graphite, **D**: Anodic Black, **B**: Jet Black, **H**: Anodic Champagne, **K**: Satin Copper, **X**: Satin Bronze, **M**: Satin Cloud, **R**: Special Surface (please specify)
Control Gear	**S**: Switch&Dimm, **N**: Motion Sensor
Colour Rendering	**8**: CRI>80, **9**: CRI>90, **F**: Full Spectrum
Colour Temperature	**27**: 2700K, **30**: 3000K, **35**: 3500K, **40**: 4000K, **65**: 6500K, **TW**: Tunable White 2700-6500K
Power	**M**: Medium Power
Size	**L936**
Base	**G**: Rectagular Base, **U**: U-Cut-Out Base, **T**: Table Clamp, **R**: Table Grommet
Lens Louvre	**W**: Snow White, **V**: Ivory White, **A**: Satin Silver, **F**: Anodic Silver, **D**: Anodic Black, **K**: Satin Copper, **G**: Satin Gold, **J**: Satin Pale Gold, **L**: Satin Cipria, **M**: Satin Cloud, **R**: Special Surface (please specify)