
Liquid Line 40 WX | Wall

Variant code **QWX-L1475-M-O**




TECHNICAL DATA

Luminaire luminous flux	5780 lm
Power consumption	40 W
Luminous efficacy	145 lm/W
Colour temperature	4000 K
CRI	> 80
Reference measurement conditions	840: 4000 K, CRI>80
Optical system	Opal Diffuser (O)
Light distribution	Direct-Indirect
Power class	Medium Power (M)
Size	L1475

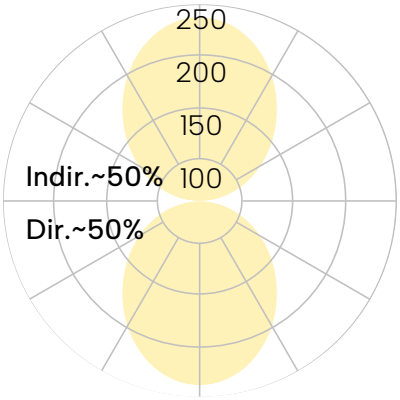

Opal Diffuser | Direct-Indirect

Curve image from the catalogue — not an LDT measurement

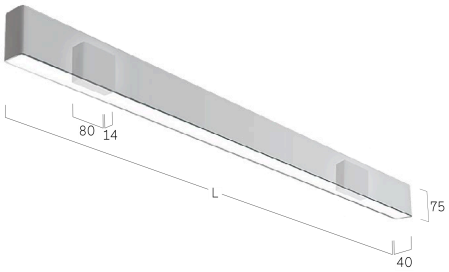

Dimension drawing

ORDERING CODE

Q WX O - - - - - M - L1475

Product Family	**Q**: Liquid Line
Type	**WX**: Direct-Indirect
Optical System	**O**: Opal Diffuser
Surface Finish	**W**: Snow White, **V**: Ivory White, **S**: Radiant Silver, **A**: Satin Silver, **F**: Anodic Silver, **U**: Urban Graphite, **D**: Anodic Black, **B**: Jet Black, **H**: Anodic Champagne, **K**: Satin Copper, **X**: Satin Bronze, **M**: Satin Cloud, **R**: Special Surface (please specify)
Control Gear	**E**: On/Off, **L**: DALI, **H**: Touch-Dim, **C**: Casambi, **6**: DALI DT6 for TW [L1182-L2055], **8**: DALI DT8 for TW [L890-L2055]
Colour Rendering	**8**: CRI>80, **9**: CRI>90, **F**: Full Spectrum [except 2200K]
Colour Temperature	**22**: 2200K, **27**: 2700K, **30**: 3000K, **35**: 3500K, **40**: 4000K, **65**: 6500K, **TW**: Tunable White 2700-6500K
Power	**M**: Medium Power
Size	**L1475**