Liquid Line 40 Compact F5 | Recessed



EN Recessed mounted LED luminaire for ceilings with cut-out openings. Direct-only light distribution. Luminaire body with soft corners made of aluminium, complete frame crafted in one piece with no visible seams. Surface white, silver, graphite, black or champagne coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Precision lenses with louvre for wide uniform symmetrical light distribution with high glare limitation (UGR<19). Louvre available in various surfaces. Separate driver included, optionally switchable or dimmable (DALI). Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning ≤ MacAdam 3. Colour rendering CRI>80, CRI>90 or Full Spectrum.


DE LED-Einbauleuchte für gesägte Deckenöffnungen. Rein direktstrahlend. Leuchtenkörper mit feinen Radien aus Aluminium, umlaufender Rahmen gefertigt aus einem Guss ohne sichtbare Nahtstellen. Oberfläche in weiß, silber, graphit, schwarz oder champagnerfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Präzisionslinsen mit Abblendraster für breite rotationssymmetrische Lichtstärkeverteilung bei gleichzeitig hoher Blendungsbegrenzung (UGR<19). Abblendraster in verschiedenen Oberflächen verfügbar. Separater Konverter im Lieferumfang enthalten, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI). Farbtemperatur 2200K, 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial ≤ MacAdam 3. Farbwiedergabe CRI>80, CRI>90 oder Full Spectrum.

QF5

QF5LWE-830H-L149-G


Product Family	**Q**: Liquid Line
Type	**F5**: Direct Only
Optical System	**L**: Lens Louvre
Surface Finish	**W**: Snow White, **V**: Ivory White, **S**: Radiant Silver, **A**: Satin Silver, **F**: Anodic Silver, **U**: Urban Graphite, **D**: Anodic Black, **B**: Jet Black, **H**: Anodic Champagne, **K**: Satin Copper, **X**: Satin Bronze, **M**: Satin Cloud, **R**: Special Surface (please specify)
Control Gear	**E**: On/Off, **L**: DALI, **H**: Touch-Dim
Colour Rendering	**8**: CRI>80, **9**: CRI>90, **F**: Full Spectrum [except 2200K]
Colour Temperature	**22**: 2200K, **27**: 2700K, **30**: 3000K, **35**: 3500K, **40**: 4000K65: 6500K
Power	**M**: Medium Power, **H**: High Power
Size	**L149**, **L281**, **L413**
Lens Louvre	**W**: Snow White, **V**: Ivory White, **A**: Satin Silver, **F**: Anodic Silver, **D**: Anodic Black, **K**: Satin Copper, **G**: Satin Gold, **J**: Satin Pale Gold, **L**: Satin Cipria, **M**: Satin Cloud

Lens Louvre | Direct



L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
149	460 lm/3 W	1140 lm/8 W
281	930 lm/6 W	2270 lm/16 W
413	1390 lm/9 W	3410 lm/23 W

Lumen values: luminaire luminous flux, 840: 4000 K, CRI>80. Other configurations on request.

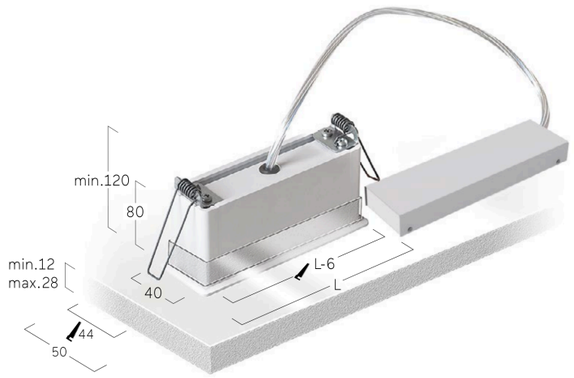



B Jet Black
W Snow White



A Satin Silver
A Satin Silver



B Jet Black
D Anodic Black

B Jet Black
G Satin Gold



K Satin Copper
K Satin Copper