Liquid Line 40 WX | Wall



EN LED wall mounted luminaire. Direct-indirect light distribution. Luminaire body with soft corners made of aluminium, crafted in one piece with no visible seams at the ends. Surface white, silver, graphite, black or champagne coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Satin opal diffuser for general lighting with maximum transmittance and uniformity. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI). Colour temperature 2200K, 2700K, 3000K, 4000K, 6500K or Tunable White. Binning ≤ MacAdam 3. Colour rendering CRI>80. On request: Integration of emergency lighting components.


DE LED-Wandanbauleuchte. Direkt-indirektstrahlend. Leuchtenkörper mit feinen Radien aus Aluminium, gefertigt aus einem Guss ohne sichtbare Nahtstellen an den Stirnseiten. Oberfläche weiß, silber, graphit, schwarz oder champagnerfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Satinierter Opaldiffusor für Allgemeinbeleuchtung mit max. Transmissionsgrad und homogener Lichtpunktauflösung. Konverter in Leuchtengehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI). Farbtemperatur 2200K, 2700K, 3000K, 4000K, 6500K oder Tunable White. Binning initial ≤ MacAdam 3. Farbwiedergabe CRI>80. Auf Anfrage: Integration von Notlichtkomponenten.

QWX

QWXOWE-830M-L1182


Product Family	**Q**: Liquid Line
Type	**WX**: Direct-Indirect
Optical System	**O**: Opal Diffuser
Surface Finish	**W**: Snow White, **V**: Ivory White, **S**: Radiant Silver, **A**: Satin Silver, **F**: Anodic Silver, **U**: Urban Graphite, **D**: Anodic Black, **B**: Jet Black, **H**: Anodic Champagne, **K**: Satin Copper, **X**: Satin Bronze, **M**: Satin Cloud, **R**: Special Surface (please specify)
Control Gear	**E**: On/Off, **L**: DALI, **H**: Touch-Dim, **C**: Casambi, **6**: DALI DT6 for TW [L1182-L2055], **8**: DALI DT8 for TW [L890-L2055]
Colour Rendering	**8**: CRI>80, **9**: CRI>90, **F**: Full Spectrum [except 2200K]
Colour Temperature	**22**: 2200K, **27**: 2700K, **30**: 3000K, **35**: 3500K, **40**: 4000K, **65**: 6500K, **TW**: Tunable White 2700-6500K
Power	**M**: Medium Power, **H**: High Power
Size	**L890**, **L1182**, **L1475**, **L1765**, **L2055**

Opal Diffuser | Direct-Indirect



L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
890	3380 lm/23 W	4150 lm/28 W
1182	4580 lm/32 W	5620 lm/39 W
1475	5780 lm/40 W	7090 lm/48 W
1765	6980 lm/47 W	8560 lm/58 W
2055	8180 lm/57 W	10,030 lm/70 W

Lumen values: luminaire luminous flux, 840: 4000 K, CRI>80. Other configurations on request.

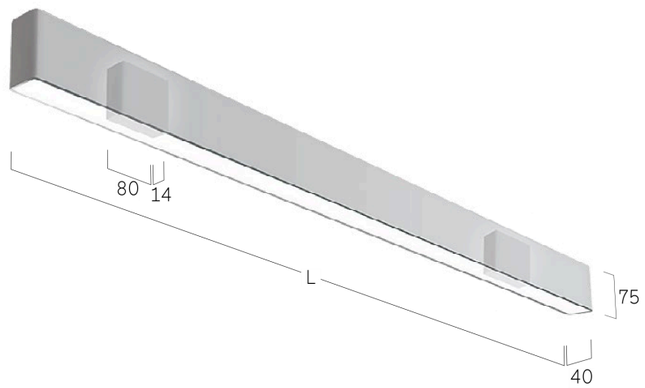

W Snow White



S Radiant Silver



U Urban Graphite



B Jet Black



H Anodic Champagne



K Satin Copper