
Liquid Line 60 G4/P4 | Suspended

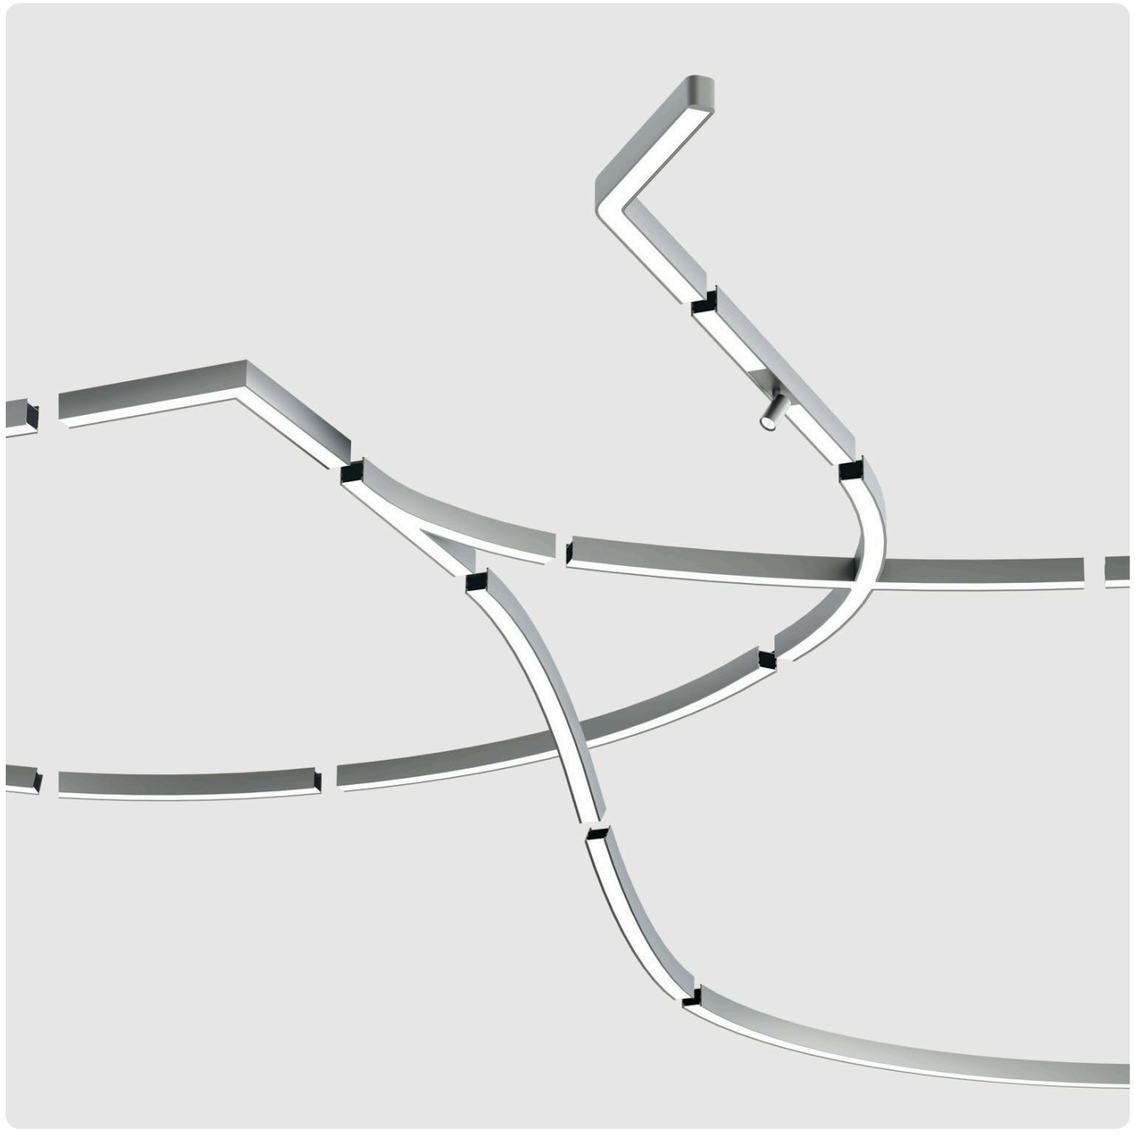


Ordered according to a project drawing approved by the client.

EN LED pendant light system. Direct-indirect or direct-only light distribution. Highly flexible system consisting of linear elements, vertically and horizontally curved elements and Y- and X-connectors. Each module is designed as a stand-alone luminaire with an integrated driver and can be connected to the other modules using a sophisticated connector system to create any desired lighting structure. Millimetre-precise manufacturing as well as bespoke curves possible in small quantities thanks to intelligent software-based production system. Based on customer specifications, Lightnet creates technical drawings of the desired structure for review and approval. Maximum flexibility enables almost 100% realisation of customer design into production drawings. Luminaire body with soft corners made of 60mm wide aluminium profile, crafted in one piece with no visible seams at the ends. Surface white, silver, graphite, black, champagne or copper coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Microprismatic screen with optimized glare reduction for workplaces. Satin opal diffuser for general lighting. Driver optionally switchable or dimmable (DALI, Touch-Dim, Casambi). Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning ≤ MacAdam 3. Colour rendering CRI>80, CRI>90 or Full Spectrum. Height-adjustable cord suspension with transparent power supply cable. Ceiling rose to match luminaire body.


DE LED-System-Pendelleuchte. Direkt-indirekt oder rein direktstrahlend. Hochflexibles System bestehend aus linearen Elementen, vertikal und horizontal gebogenen Elementen sowie Y- und X-Verbindungselementen. Jedes Modul ist dabei als unabhängige Einzelleuchte mit integriertem Konverter konzipiert und kann mit den anderen Modulen durch ein intelligentes Konnektor-System zu beliebigen Lichtstrukturen verbunden werden. Millimetergenaue Längenfertigung sowie Sonderradien durch intelligentes softwarebasiertes Produktionssystem in Stückzahl 1 möglich. Auf Grundlage skizzierter Kundenvorgabe erstellt Lightnet technische Zeichnung der gewünschten Struktur zur Prüfung und Freigabe. Maximale Flexibilität ermöglicht nahezu 100%ige Umsetzung von kundenseitiger Entwurfsskizze in Produktionszeichnung. Leuchtenkörper mit feinen Radien aus Aluminiumprofil mit 60mm Profilbreite, gefertigt aus einem Guss ohne sichtbare Nahtstellen an den Stirnseiten. Oberfläche weiß, silber, graphit, schwarz, champagner oder kupferfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Microprismenoptik mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen. Satinierter Opaldiffusor für Allgemeinbeleuchtung. Konverter wahlweise einfach schaltbar oder stufenlos dimmbar (DALI, Touch-Dim, Casambi). Farbtemperatur 2200K, 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial ≤ MacAdam 3. Farbwiedergabe CRI>80, CRI>90 oder Full Spectrum. Stufenlos höhenverstellbare Seilabhängung mit transparent ummantelter Zuleitung. Lackierung Baldachin passend Leuchtenkörper.

Microprismatic | Direct-Indirect




Lumen/Watt Low Power	3530 lm/22.8 W per metre
Lumen/Watt Medium Power	5040 lm/32.5 W per metre
Lumen/Watt High Power	6340 lm/41.6 W per metre

Microprismatic | Direct




Lumen/Watt Low Power	1570 lm/11.9 W per metre
Lumen/Watt Medium Power	2270 lm/17.2 W per metre
Lumen/Watt High Power	2970 lm/22.8 W per metre

Opal Diffuser | Direct-Indirect



Lumen/Watt Low Power	3660 lm/22.8 W per metre
Lumen/Watt Medium Power	5230 lm/32.5 W per metre
Lumen/Watt High Power	6600 lm/41.6 W per metre

Opal Diffuser | Direct



Lumen/Watt Low Power	1700 lm/11.9 W per metre
Lumen/Watt Medium Power	2460 lm/17.2 W per metre
Lumen/Watt High Power	3230 lm/22.8 W per metre

Lumen values: luminaire luminous flux, 840: 4000 K, CRI>80. Other configurations on request.