
# Liquid Line 40 CX | 3-Phase Track

Variant code **QCX-L1461-E-L**



## TECHNICAL DATA

| | |
|---|---|
| Luminaire luminous flux | 3080 lm |
| Power consumption | 19 W |
| Luminous efficacy | 162 lm/W |
| Colour temperature | 4000 K |
| CRI | > 80 |
| Reference measurement conditions | 840: 4000 K, CRI>80 |
| Optical system | Lens Louvre (L) |
| Light distribution | Direct |
| Power class | Low Power [only Lens] (E) |
| Size | L1461 |

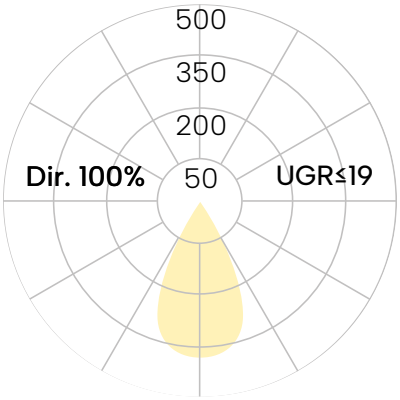


**Lens Louvre | Direct**

Curve image from the catalogue — not an LDT measurement




**Dimension drawing**

## ORDERING CODE

**Q CX L - - - E - L1461 - - -**

| | |
|---|---|
| Product Family | **Q**: Liquid Line |
| Type | **CX**: 3-Phase Track |
| Optical System | **L**: Lens Louvre |
| Surface Finish | **W**: Snow White, **V**: Ivory White, **S**: Radiant Silver, **A**: Satin Silver, **F**: Anodic Silver, **U**: Urban Graphite, **D**: Anodic Black, **B**: Jet Black, **H**: Anodic Champagne, **K**: Satin Copper, **X**: Satin Bronze, **M**: Satin Cloud, **R**: Special Surface (please specify) |
| Control Gear | **E**: On/Off, **L**: DALI |
| Colour Rendering | **8**: CRI>80, **9**: CRI>90, **F**: Full Spectrum [except 2200K] |
| Colour Temperature | **22**: 2200K, **27**: 2700K, **30**: 3000K, **35**: 3500K, **40**: 4000K, **65**: 6500K |
| Power | **E**: Low Power [only Lens] |
| Size | **L1461** |
| Adaptor | **W**: In-House Electronic [white], **B**: In-House Electronic [black] |
| Lens Louvre | **W**: Snow White, **V**: Ivory White, **A**: Satin Silver, **F**: Anodic Silver, **D**: Anodic Black, **K**: Satin Copper, **G**: Satin Gold, **J**: Satin Pale Gold, **L**: Satin Cipria, **M**: Satin Cloud, **R**: Special Surface (please specify) |