
Liquid Line 40 SX | Floor

Variant code **QSX-M-L**



TECHNICAL DATA

Luminaire luminous flux	10,700 lm
Power consumption	64 W
Luminous efficacy	167 lm/W
Colour temperature	4000 K
CRI	> 80
Reference measurement conditions	840: 4000 K, CRI>80
Optical system	Lens Louvre (L)
Light distribution	Direct-Indirect
Power class	Medium Power (M)
Size	L1490, L1590

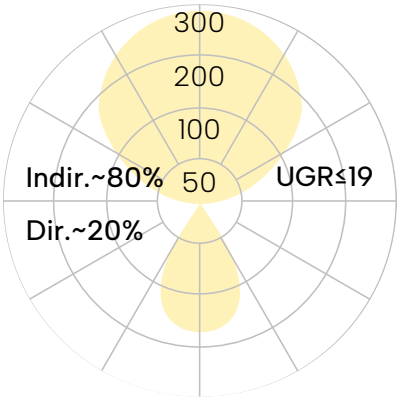

Lens Louvre | Direct-Indirect

Curve image from the catalogue — not an LDT measurement

ORDERING CODE

Q S X L – – – – M – – – – – –

Product Family	**Q**: Liquid Line
Type	**SX**: Direct-Indirect
Optical System	**L**: Lens Louvre
Surface Finish	**W**: Snow White, **V**: Ivory White, **S**: Radiant Silver, **A**: Satin Silver, **F**: Anodic Silver, **U**: Urban Graphite, **D**: Anodic Black, **B**: Jet Black, **H**: Anodic Champagne, **K**: Satin Copper, **X**: Satin Bronze, **M**: Satin Cloud, **R**: Special Surface (please specify)
Control Gear	**X**: Separately Dimmable, **M**: Multisensor, **R**: Swarm Control, **B**: HCL, **C**: Casambi
Colour Rendering	**8**: CRI>80, **9**: CRI>90, **F**: Full Spectrum
Colour Temperature	**27**: 2700K, **30**: 3000K, **35**: 3500K, **40**: 4000K, **65**: 6500K, **TW**: Tunable White 2700-6500K
Power	**M**: Medium Power
Size	**L1490**, **L1590**
Base	**U**: U-Shape, **I**: T-Shape
Reflector	**V**: Ivory White, **F**: Anodic Silver, **U**: Urban Graphite, **D**: Anodic Black, **H**: Anodic Champagne, **K**: Satin Copper, **X**: Satin Bronze, **M**: Satin Cloud, **R**: Special Surface (please specify)
Plug	**A**: Schuko CEE7/7 (Type E+F), **B**: CH T12 (Type J), **C**: UK BS 1363 (Type G), **D**: Wieland, **E**: WAGO