Liquid Line Compact G5/P5 | Suspended



EN LED pendant luminaire. Direct-indirect or direct-only light distribution. Luminaire body with soft corners made of aluminium, crafted in one piece with no visible seams at the ends. Surface white, silver, graphite, black or champagne coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Precision lenses with louvre for wide uniform symmetrical light distribution with high glare limitation (UGR<19). Louvre available in various surfaces. Satin opal diffuser for general lighting with maximum transmittance and uniformity. Driver integrated into ceiling box, optionally switchable or dimmable (DALI). Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K or 6500K. Binning ≤ MacAdam 3. Colour rendering CRI>80, CRI>90 or Full Spectrum. Current-carrying cord suspension without additional cables. Ceiling rose to match luminaire body.

DE LED-Pendelleuchte. Direkt-indirekt oder rein direktstrahlend. Leuchtenkörper mit feinen Radien aus Aluminium, gefertigt aus einem Guss ohne sichtbare Nahtstellen an den Stirnseiten. Oberfläche in weiß, silber, graphit, schwarz oder champagnerfarben lackiert. Weitere Oberflächenoptionen siehe Lightnet-Surface-Collection oder RAL nach Wahl. Präzisionslinsen mit Abblendraster für breite rotationssymmetrische Lichtstärkeverteilung bei gleichzeitig hoher Blendungsbegrenzung (UGR<19). Abblendraster in verschiedenen Oberflächen verfügbar. Satinierter Opaldiffusor für Allgemeinbeleuchtung mit max. Transmissionsgrad und homogener Lichtpunktauflösung. Konverter in Deckendose integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI). Farbtemperatur 2200K, 2700K, 3000K, 3500K, 4000K oder 6500K. Binning initial ≤ MacAdam 3. Farbwiedergabe CRI>80, CRI>90 oder Full Spectrum. Stromführende Seilabhängung ohne zusätzliche Kabel. Lackierung Baldachin passend Leuchtenkörper.


QG5 · QP5

QG5LWE-830H-L139-AK

Product Family	**Q**: Liquid Line
Type	**G5**: Direct Only, **P5**: Direct-indirect
Optical System	**O**: Opal Diffuser, **L**: Lens Louvre
Surface Finish	**W**: Snow White, **V**: Ivory White, **S**: Radiant Silver, **A**: Satin Silver, **F**: Anodic Silver, **U**: Urban Graphite, **D**: Anodic Black, **B**: Jet Black, **H**: Anodic Champagne, **K**: Satin Copper, **X**: Satin Bronze, **M**: Satin Cloud, **R**: Special Surface (please specify)
Control Gear	**E**: On/Off, **L**: DALI, **H**: Touch-Dim
Colour Rendering	**8**: CRI>80, **9**: CRI>90, **F**: Full Spectrum [except 2200K]
Colour Temperature	**22**: 2200K, **27**: 2700K, **30**: 3000K, **35**: 3500K, **40**: 4000K, **65**: 6500K
Power	**M**: Medium Power, **H**: High Power
Size	**L139**
Suspension	**A**: Single Cord Suspension
Lens Louvre	**W**: Snow White, **V**: Ivory White, **A**: Satin Silver, **F**: Anodic Silver, **D**: Anodic Black, **K**: Satin Copper, **G**: Satin Gold, **J**: Satin Pale Gold, **L**: Satin Cipria, **M**: Satin Cloud, **R**: Special Surface (please specify)


IP20 CE UKCA

Lens Louvre | Direct-Indirect




L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
139	820 lm/6 W	2070 lm/16 W

Lens Louvre | Direct




L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
139	460 lm/3 W	1140 lm/8 W

Opal Diffuser | Direct-Indirect




L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
139	1200 lm/9 W	1960 lm/15 W

Opal Diffuser | Direct



L mm	Lumen/Watt Medium Power	Lumen/Watt High Power
139	600 lm/5 W	980 lm/8 W

Lumen values: luminaire luminous flux, 840: 4000 K, CRI>80. Other configurations on request.

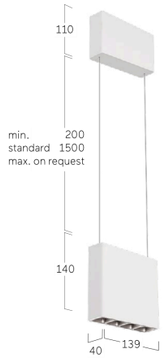



W Snow White
W Snow White



W Snow White
A Satin Silver



W Snow White
D Anodic Black



W Snow White
G Satin Gold



W Snow White
J Satin Pale Gold



W Snow White
K Satin Copper

W Snow White



A Satin Silver



U Urban Graphite



B Jet Black



K Satin Copper



H Anodic Champagne