
# Liquid Line Compact G5/P5 | Suspended

Ordering code




## TECHNICAL DATA

| | |
|---|---|
| Luminaire luminous flux | 460 lm |
| Power consumption | 3 W |
| Luminous efficacy | 153 lm/W |
| Reference measurement conditions | 840: 4000 K, CRI>80 |
| Optical system | Lens Louvre (L) |
| Light distribution | Direct |
| Power class | Medium Power (M) |
| Size | L139 |

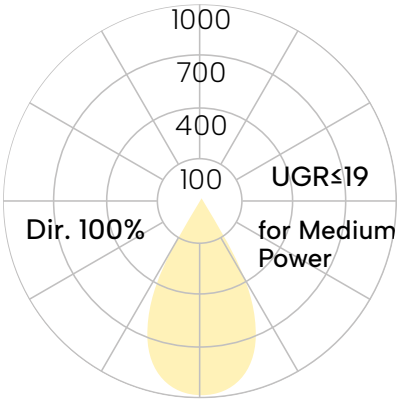


**Lens Louvre | Direct**

Curve image from the catalogue — not an LDT measurement




**Dimension drawing**

## ORDERING CODE

| | |
|---|---|
| Product Family | Colour Temperature |
| Type | Power |
| Optical System | Size |
| Surface Finish | Suspension |
| Control Gear | Lens Louvre |
| Colour Rendering | |

# Liquid Line Compact G5/P5 | Suspended

Ordering code

## DESCRIPTION

Customer / Project:

Note:

## SPECIFICATIONS

| | |
|---|---|
| Productname | Liquid Line-G5 |
| Lamp | LED |
| Installation Type | Suspended |
| Surface finish | |
| Light characteristics | Direct light distribution |
| Colour temperature | |
| Colour Rendering Index (CRI) | |
| Optical system | Lens Louvre |
| Reflector Colour Inside | |
| Control | |
| Length L/Diameter D (mm) | L=139mm |
| Width W (mm) | W=40mm |
| Height H (mm) | H=140mm |
| Current/Power | Medium Power |
| Luminous Flux | |
| Power consumption | |
| Suspension | |
| Ceiling rose colour | Ceiling rose to match luminaire body |
| Pendant length (mm) | Pendant length standard 1500mm, max on request |
| Degree of protection | IP20 |
| Cable Colour | Current-carrying cord suspension without additional cables |
| LED lifetime | L87B10 (tq 25°C) = 50.000h |
| Photobiological class | RG0 (EN62471) |
| Indoor/Outdoor | Indoor: ta [ambient] max. 25°C |
| Weight (kg) | 1,4kg |