Liquid Line Compact G5/P5 | Suspended


Ordering code



TECHNICAL DATA


Luminaire luminous flux	820 lm
Power consumption	6 W
Luminous efficacy	137 lm/W
Reference measurement conditions	840: 4000 K, CRI>80
Optical system	Lens Louvre (L)
Light distribution	Direct-Indirect
Power class	Medium Power (M)
Size	L139

IP20 CE UKCA

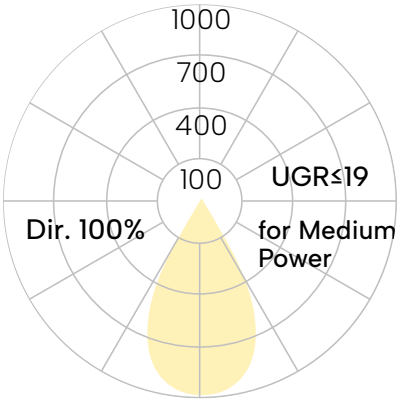

Lens Louvre | Direct-Indirect

Curve image from the catalogue — not an LDT measurement



Dimension drawing

ORDERING CODE

Product Family	Colour Temperature
Type	Power
Optical System	Size
Surface Finish	Suspension
Control Gear	Lens Louvre
Colour Rendering	

Liquid Line Compact G5/P5 | Suspended

Ordering code

DESCRIPTION

Customer / Project:

Note:

SPECIFICATIONS

Productname	Liquid Line-P5
Lamp	LED
Installation Type	Suspended
Surface finish	
Light characteristics	Direct-Indirect light distribution
Colour temperature	
Colour Rendering Index (CRI)	
Optical system	Lens Louvre
Reflector Colour Inside	
Control	
Length L/Diameter D (mm)	L=139mm
Width W (mm)	W=40mm
Height H (mm)	H=140mm
Current/Power	Medium Power
Luminous Flux	
Power consumption	
Suspension	
Ceiling rose colour	Ceiling rose to match luminaire body
Pendant length (mm)	Pendant length standard 1500mm, max on request
Degree of protection	IP20
Cable Colour	Current-carrying cord suspension without additional cables
LED lifetime	L87B10 (tq 25°C) = 50.000h
UGR	UGR<=19
Photobiological class	RG0 (EN62471)
Indoor/Outdoor	Indoor: ta [ambient] max. 25°C
Weight (kg)	1,5kg