

Specification Status: Released

Maximum Electrical Rating

Voltage: 6.0V_{DC}

Short Circuit Current: 40A

Notes:

1. All terminations are Tin plated.
2. Drawing not to scale

Marking: K

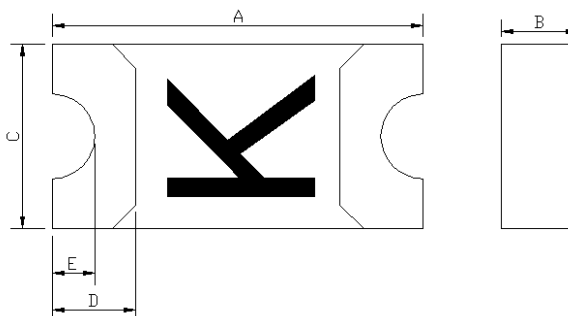


TABLE I. DIMENSIONS:

	A		B		C		D		E
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
mm:	1.40	1.80	0.55	0.95	0.60	1.00	0.10	0.50	0.075
in:	(0.055)	(0.071)	(0.021)	(0.037)	(0.023)	(0.039)	(0.004)	(0.020)	(0.003)

TABLE II. PERFORMANCE RATINGS:

CURRENT RATINGS**								TIME TO TRIP**	RESISTANCE VALUES	TRIPPED-STATE POWER DISSIPATION**
AMPERES AT 0°C	AMPERES AT 25°C	AMPERES AT 60°C	AMPERES AT 85°C	SECONDS AT 25°C, 3.5A MAX	OHMS AT 25°C	WATTS AT 25°C, 6.0V MAX				
HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	HOLD	TRIP	MIN	MAX*	
0.41	0.83	0.35	0.70	0.25	0.50	0.17	0.34	0.1	0.28	1.00

* Maximum resistance is measured 1 hour after reflow.

** Values specified were determined using PCB's with 0.030"x1.0 ounce copper traces.

Agency Recognitions:

UL, CSA

Reference Documents:

PS300

Precedence:

This specification takes precedence over documents referenced herein.

Effectivity:

Reference documents shall be the issue in effect on the date of invitation for bid.

Caution:

Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information

ROHS Compliant

Directive 2002/95/EC
Compliant

ELV Compliant

Directive 2000/53/EC
Compliant

Pb-Free



Halogen Free*



* Halogen Free refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm.