


# Step 2

## Register WIFI Network


Registering the WIFI Network

1. Reset your device

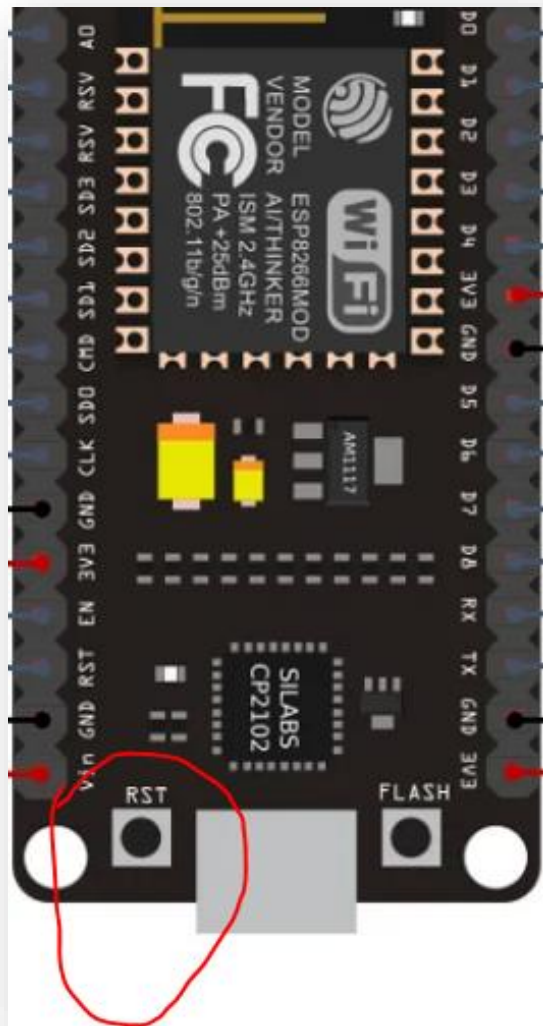

2. Get your laptop or smartphone or tablet or anything that can connect to a WIFI network and has an internet browser like google chrome browser

3. Open the WIFI and find and connect to the “kamoteq” hotspot and verify that you successfully connected to the “kamoteq” network

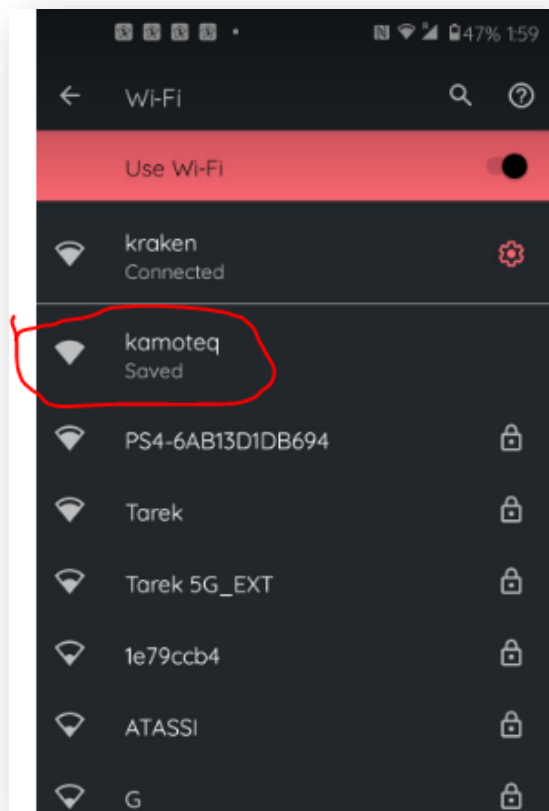

4. Open the google chrome browser and enter <http://192.168.4.1> and a registration page will load,
  5. In the registration form, enter your HOME WIFI network SSID, PASSWORD, and the new NAME for your ESP device
- Note.** Please make sure the password has no extra white spaces at the end.

WIFI REGISTRATION

SSID

kraken

PASS

~~XXXXXXXXXX~~


DEVICE NAME

Rolly

Register

[ Author ]


6. After clicking the register button, the confirmation page will load, and to finalize the process just click "Connect" this will reset your device and your device will attempt to connect to the HOME WIFI network you registered, if all credentials are correct this will connect your device without any error.

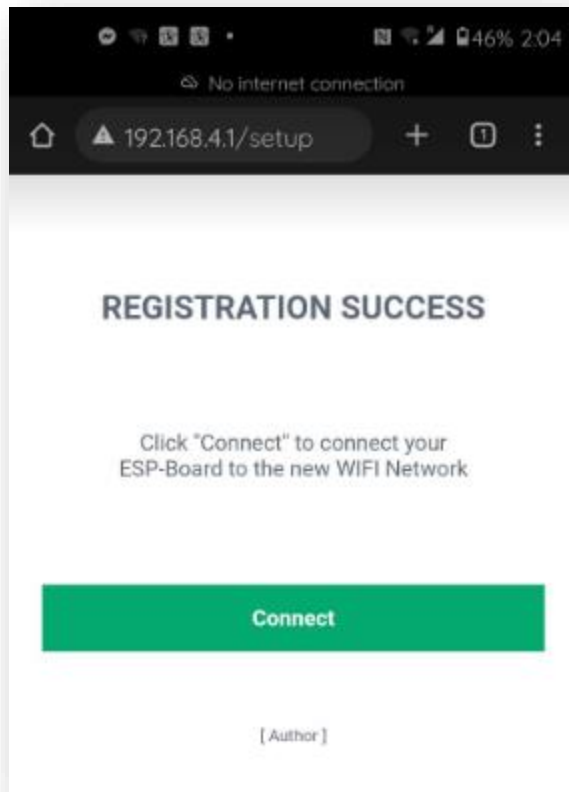

Note. After clicking Connect, it will load an error page, since this will reset the device and the page will not be available, this is normal.

7. Wait for a minute or two, this will connect your device to your home WIFI Network
8. To test the new ESP device, open your google chrome browser and enter <http://<device-name>/> a page will load with details on how to control the newly configured ESP device

Example

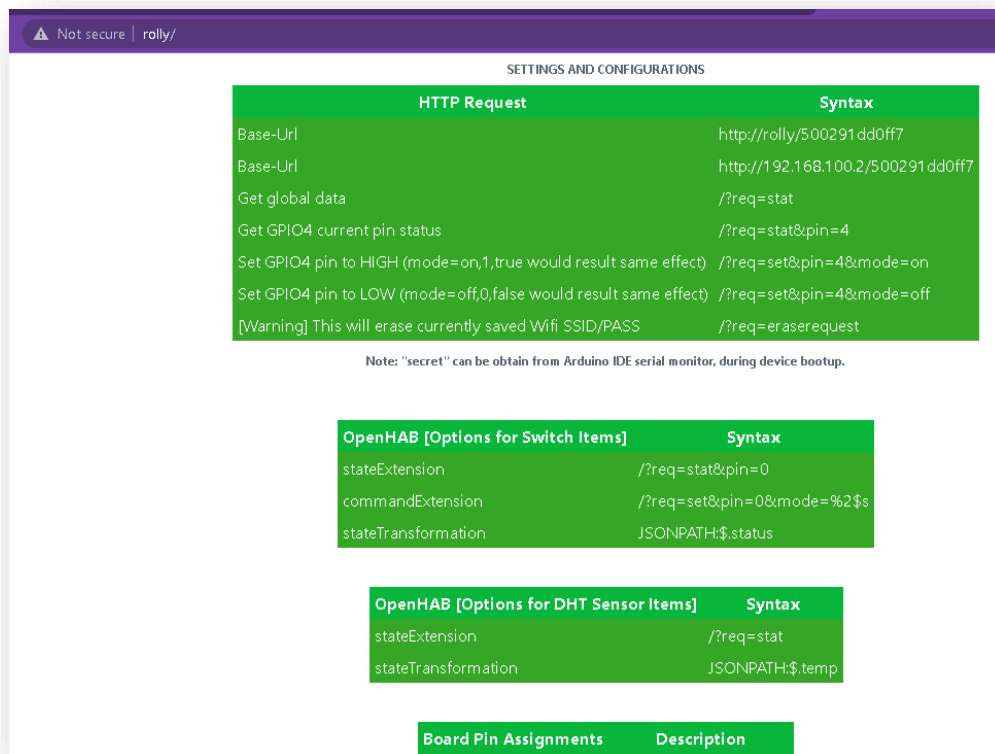



This Page concluded that the registration and configuration are successful!  
Congratulations!

If in case you receive an error, just repeat the process,

and if you made a mistake with the password this must be erased, on  
[GitHub](#), there is a special bin file to erase the password.

<https://github.com/kamoteqv2/kamoteq-repo/tree/main/kamoteq-password-eraser-bin-file>

use the below bin file to flash out the old password in your ESP device using  
the nodeMCU flasher

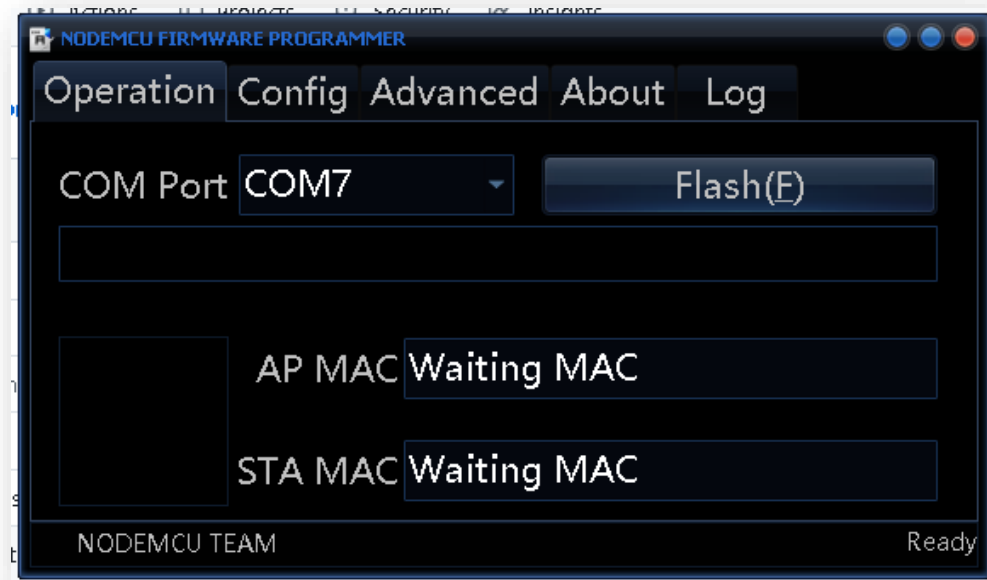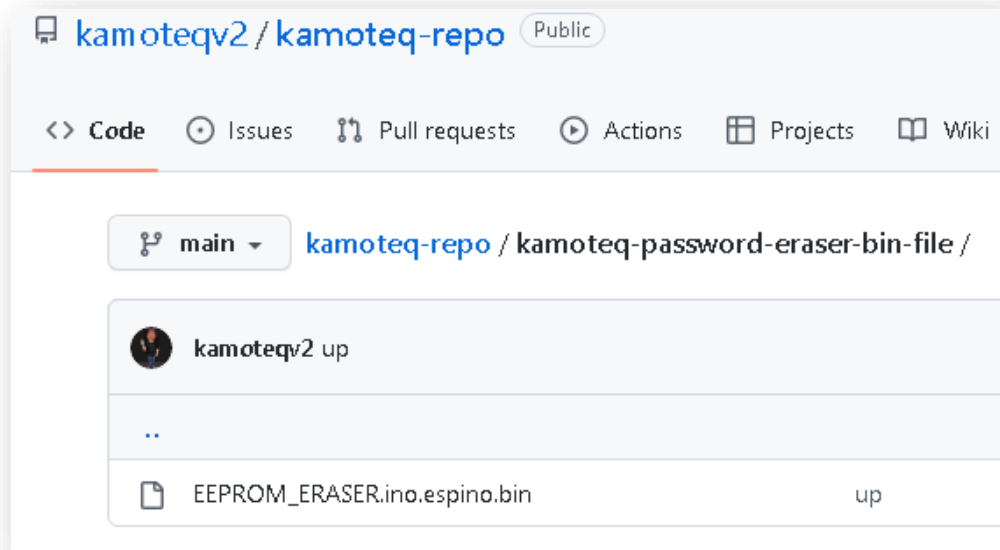

End

