

**A MAJOR PROJECT REPORT**  
**ON**  
**AN ANALYTICAL STUDY ON THE PHISICO-CHEMICAL**  
**CHARACTERISTICS OF GROUND WATER IN**  
**VIJAYAWADAD BY USING GIS AND ITS SUITABILITY**

*Submitted in partial fulfilment of the requirement for the award of the Degree in*

**BACHELOR OF TECHNOLOGY**  
**IN**  
**CIVIL ENGINEERING**

*Submitted by*

<b>K. SAI ANAND VARDHAN</b>	<b>-</b>	<b>18501A0125</b>
<b>L.V.S.S. KISHORE</b>	<b>-</b>	<b>18501A0128</b>
<b>K. CHANDRASEKHAR</b>	<b>-</b>	<b>18501A0123</b>
<b>L. SRINIVASA RAO</b>	<b>-</b>	<b>18501A0127</b>

Under the Guidance of  
**Dr. A. ADILAKSHMI,**  
Professor



**DEPARTMENT OF CIVIL ENGINEERING**

**PRASAD V. POTLURI SIDDHARTHA INSTITUTE OF TECHNOLOGY**  
**(AUTONOMOUS)**

**Affiliated to JNTU Kakinada, Approved by AICTE, New Delhi**

**Accredited by NBA & NAAC A+, ISO 9001:2015 Certified Institution**

**KANURU, VIJAYAWADA-520007**

**2021-2022**

**PRASAD V. POTLURI SIDDHARTHA INSTITUTE OF TECHNOLOGY**

**(Autonomous)**

**DEPARTMENT OF CIVIL ENGINEERING**

**KANURU, VIJAYAWADA – 520007.**



## **CERTIFICATE**

This is to certify that the Project work entitled “AN ANALYTICAL STUDY ON THE PHISICO-CHEMICAL CHARACTERISTICS OF GROUND WATER IN VIJAYAWADAD BY USING GIS AND ITS SUITABILITY” is a record of bonafide work carried out by **K. SAI ANAND VARDHAN (18501A0125), L.V.S.S. KISHORE (18501A0128), K. CHANDRASEKHAR (18501A0123), L. SRINIVASA RAO (18501A0127)** for the award of **BACHELOR OF TECHNOLOGY** degree in **CIVIL ENGINEERING** at **PRASAD V. POTLURI SIDDHARTHA INSTITUTE OF TECHNOLOGY** is a record of student’s work carried out under our supervision and guidance during academic year 2021 – 2022.

**(Dr. A. ADILAKSHMI)**

**Project Guide**

**(Dr. K. RAMESH)**

**Head of the Department**

**External Examiner**

**Internal Examiner**

## **DECLARATION**

This is to certify that the Major project report entitled “**AN ANALYTICAL STUDY ON THE PHISICO-CHEMICAL CHARACTERISTICS OF GROUND WATER IN VIJAYAWADAD BY USING GIS AND ITS SUITABILITY**” written and submitted by us is an original work done under the guidance of **Dr. A. ADILAKSHMI, Professor** is submitted in partial fulfillment of the requirements for the award of the Degree of Bachelor of Technology in Civil Engineering. This is a record of bonafide work carried out by us and the results embodied in this Project Report have not been reproduced and copied from any source.

### **PROJECT ASSOCIATES:**

**K. SAI ANAND VARDHAN - 18501A0125**

**L.V.S.S. KISHORE - 18501A0128**

**K. CHANDRASEKHAR - 18501A0123**

**L. SRINIVASA RAO - 18501A0127**

## **ACKNOWLEDGEMENT**

The satisfaction and euphoria on the successful completion of any task would be incomplete without the mention of the people who made it possible, whose constant guidance and encouragement crowned our effort with success.

We would like to express our profound appreciation to our Principal **Dr. K. Sivaji Babu, Principal, PVP Siddhartha Institute of Technology** for extending his official support for the completion of our Major Project.

We express our thanks to **Dr. K. Ramesh, Head of Civil Engineering Department**, for all the facilities provided to successfully complete our Major project work.

We are deeply indebted to our Project Guide, **Dr. A. ADILAKSHMI, Assistant Professor**, for the motivation, guidance and patience throughout this Major project work. We appreciate her broad range of expertise and attention to detail, as well as the constant encouragement she has given to us over the years.

In our association with all the above persons, we experienced not only their depth of knowledge but also affection towards us. Finally, we take this opportunity to thank one and all of our **Civil Engineering Teaching & Non - Teaching Staff** for their able cooperation both academic and non – academic all throughout our four years. We shall remember all our staff as long as our memory lives.

### **PROJECT ASSOCIATES:**

**K. SAI ANAND VARDHAN - 18501A0125**

**L.V.S.S. KISHORE - 18501A0128**

**K. CHANDRASEKHAR - 18501A0123**

**L. SRINIVASA RAO - 18501A0127**

## **ABSTRACT**

The present study was done by the assessment of Ground water quality which is carried out in several locations in Vijayawada, Andhra Pradesh. The Ground water quality study was assessed and considerable amount of data was generated between various parameters and projected by using ArcGIS 10.8.1 version software. Maps of ground water prospects zones are prepared from the toposheets, serves as efficient tools for detailed surface based hydrogeological survey.

Arc-GIS software is used to give an insight of the integrity of ground water in Vijayawada. This assessment will help in order to develop good ground water quality region successfully. Environmental changes taking place in the Ground water should be recorded with the help of GIS and Satellite based image maps should be used as basic input parameters for Environmental mapping and recording of ground water environment. Indiscriminate use of fertilizers in certain areas has resulted in very high concentrations of some of the chemical constituents in groundwater.

# **TABLE OF CONTENTS**

<b>CHAPTER 1: INTRODUCTION .....</b>	<b>Error! Bookmark not defined.</b>
1.1 General .....	<b>Error! Bookmark not defined.</b>
1.2 Indian Scenario .....	<b>Error! Bookmark not defined.</b>
1.3 Pollution.....	<b>Error! Bookmark not defined.</b>
1.4 Study Area .....	<b>Error! Bookmark not defined.</b>
1.4.2 Geography .....	<b>Error! Bookmark not defined.</b>
1.4.2 Demographics.....	<b>Error! Bookmark not defined.</b>
1.5 Scope of the Study.....	<b>Error! Bookmark not defined.</b>
1.5.1 Need for the Study.....	<b>Error! Bookmark not defined.</b>
1.5.2 Objectives .....	<b>Error! Bookmark not defined.</b>
1.6 GIS: .....	<b>Error! Bookmark not defined.</b>
1.6.1 Components of GIS .....	<b>Error! Bookmark not defined.</b>
1.6.2 Data Structures .....	<b>Error! Bookmark not defined.</b>
1.6.3 Spatial Database Creation .....	<b>Error! Bookmark not defined.</b>
1.6.4 Attribute Database Creation .....	<b>Error! Bookmark not defined.</b>
1.7 Maps.....	<b>Error! Bookmark not defined.</b>
1.7.1 Base Map:.....	<b>Error! Bookmark not defined.</b>
<b>CHAPTER 2: LITERATURE REVIEW .....</b>	<b>Error! Bookmark not defined.</b>
2.1 Literature 1 .....	<b>Error! Bookmark not defined.</b>
2.2 Literature 2 .....	<b>Error! Bookmark not defined.</b>
2.3 Literature 3 .....	<b>Error! Bookmark not defined.</b>
2.4 Literature 4.....	<b>Error! Bookmark not defined.</b>
2.5 Literature 5 .....	<b>Error! Bookmark not defined.</b>
2.6 Literature 6.....	<b>Error! Bookmark not defined.</b>
<b>CHAPTER 3: METHODOLOGY .....</b>	<b>Error! Bookmark not defined.</b>
3.1 Study Area Selection .....	<b>Error! Bookmark not defined.</b>
3.2 Sample Collection .....	<b>Error! Bookmark not defined.</b>
3.2.1 Collection of water samples at different locations ..	<b>Error! Bookmark not defined.</b>

## **CHAPTER 4: ANALYSIS OF WATER SAMPLES** Error! Bookmark not defined.

4.1 Parametric Analysis .....	Error! Bookmark not defined.
4.1.1 Chemical Tests.....	22
4.1.2 Physical Tests.....	Error! Bookmark not defined.
4.2 Experimental Procedures .....	Error! Bookmark not defined.
4.2.1 Determination of pH .....	Error! Bookmark not defined.
4.2.2 Determination of Turbidity .....	Error! Bookmark not defined.
4.2.3 Determination of Alkalinity .....	Error! Bookmark not defined.
4.2.4 Determination of Electric Conductivity .....	Error! Bookmark not defined.
4.2.5 Determination of Total Solids, Total Suspended Solids & Total Dissolved Solids	28
4.2.6 Determination of Chloride Content.....	Error! Bookmark not defined.
4.2.7 Determination of Total Hardness .....	Error! Bookmark not defined.
4.2.8 Determination of Permanent and Temporary Hardness .....	Error! Bookmark not defined.
4.2.9 Determination of Calcium and Magnesium .....	Error! Bookmark not defined.
4.2.10 Determination of Sulphate .....	Error! Bookmark not defined.

### **4.3 Testing of Water Samples in**

#### **Laboratory**.....Error! Bookmark not defined.

4.4 Test Results.....	Error! Bookmark not defined.
4.4.1 Location 1: Patamata .....	Error! Bookmark not defined.
4.4.2 Location 2: Gandhi Nagar .....	Error! Bookmark not defined.
4.4.3 Location 3: Machavaram .....	Error! Bookmark not defined.
4.4.4 Location 4: Nidamanuru .....	Error! Bookmark not defined.
4.4.5 Location 5: Labbipet.....	Error! Bookmark not defined.
4.4.6 Location 6: Moghalrajpuram .....	Error! Bookmark not defined.
4.4.7 Location 7: Gunadala.....	Error! Bookmark not defined.
4.4.8 Location 8: Krishna Lanka .....	Error! Bookmark not defined.
4.4.9 Location 9: Auto Nagar .....	Error! Bookmark not defined.
4.4.10 Location 10: Patamatalanka.....	Error! Bookmark not defined.
4.4.11 Location 11: Governorpet.....	Error! Bookmark not defined.
4.4.12 Location 12: Enikepadu.....	Error! Bookmark not defined.
4.4.13 Location 13: Kanuru.....	Error! Bookmark not defined.

4.4.14	Location 14: Ramavarappadu .....	<b>Error! Bookmark not defined.</b>
4.4.15	Location 15: Gollapudi .....	<b>Error! Bookmark not defined.</b>
4.4.16	Location 16: Ayodhya Nagar .....	<b>Error! Bookmark not defined.</b>
4.9	Thematic Maps showing Spatial Distribution of Sample Analysis.....	<b>Error! Bookmark not defined.</b>
<b>CHAPTER 5: RESULTS AND DISCUSSION .....</b>		<b>Error! Bookmark not defined.</b>
5.1	Insight.....	60
5.1.2	Turbidity.....	60
5.1.3	Alkalinity.....	60
5.1.4	Cunductivity.....	60
5.1.5	TDS .....	60
5.1.6	Chloride.....	60
5.1.7	Calcium .....	60
5.1.8	Magnesium.....	61
5.1.9	Sulphate.....	61
5.2	Effects and Remedies of unsafe parameters.....	61
<b>CONCLUSION .....</b>		<b>666</b>
<b>REFERENCES .....</b>		<b>Error! Bookmark not defined.7</b>





## **LIST OF FIGURES**

<b>Figure No.</b>	<b>Caption</b>	<b>Page No.</b>
1.1	Location of Vijayawada	5
1.2	Map of Vijayawada	6
1.3	Vijayawada Toposheet/Base Map	11
3.1	Sample locations on Thematic Map	19
4.1	Patamata	36
4.2	Gandhi Nagar	37
4.3	Machavaram	38
4.4	Nidamanuru	39
4.5	Labbipet	40
4.6	Moghalraipuram	41
4.7	Gundala	42
4.8	Krishna Lanka	43
4.9	Auto Nagar	44
4.10	Patamatalanka	45
4.11	Governorpet	46
4.12	Enikepadu	47
4.13	Kanuru	48
4.14	Ramavarappadu	49
4.15	Gollapudi	50
4.16	Ayodhya Nagar	51
4.17	Spatial Distribution of pH	52
4.18	Spatial Distribution of Alkalinity	52
4.19	Spatial Distribution of Turbidity	53
4.20	Spatial Distribution of Conductivity	53
4.21	Spatial Distribution of TDS	54
4.22	Spatial Distribution of Chloride	54
4.23	Spatial Distribution of Total Hardness	55
4.24	Spatial Distribution of Calcium	55
4.25	Spatial Distribution of Magnesium	56
4.26	Spatial Distribution of Sulphate	56

## **LIST OF TABLES**

<b>Table No.</b>	<b>Caption</b>	<b>Page No.</b>
1.1	Attribute notations	10
3.1	Details of Sampling Location and Coordinates	18
4.1	Chemical Tests	22
4.2	Physical Tests	23
4.3	Test Results of Patamata	36
4.4	Test Results of Gandhi Nagar	37
4.5	Test Results of Machavaram	38
4.6	Test Results of Nidamanuru	39
4.7	Test Results of Labbipet	40
4.8	Test Results of Moghalrajpuram	41
4.9	Test Results of Gunadala	42
4.10	Test Results of Krishna Lanka	43
4.11	Test Results of Auto Nagar	44
4.12	Test Results of Patamatalanka	45
4.13	Test Results of Governorpet	46
4.14	Test Results of Enikepadu	47
4.15	Test Results of Kanuru	48
4.16	Test Results of Ramavarappadu	49
4.17	Test Results of Gollapudi	50
4.18	Test Results of Ayodhya Nagar	51
5.1	Water Quality Standards	58
5.2	Evaluated Water Quality Parameters at different locations	59

# **CHAPTER 1**

## **INTRODUCTION**

# CHAPTER 1

## INTRODUCTION

### **1.1 General:**

Water is the precious gift of nature to human beings. By assessing the physical, chemical, and biological characteristics of water, we can conclude its quality. The main sources of water for domestic and drinking purposes are surface water and groundwater

It is sometimes thought that water flows through underground rivers or that it collects in underground lakes. Groundwater is not confined to only a few channels or depressions in the same way that surface water is concentrated in streams and lakes. Rather, it exists almost everywhere underground. It is found underground in the spaces between particles of rock and soil, or in crevices and cracks in rock.

The water filling these openings is usually within 100meters of the surface. Much of the earth's fresh water is found in these spaces. At greater depths, because of the weight of overlying rock, these openings are much smaller, and therefore hold considerably smaller quantities of water.

Groundwater flows slowly through water-bearing formations (aquifers) at different rates. In some places, where groundwater has dissolved limestone to form caverns and large openings, its rate of flow can be relatively fast but this is exceptional.

Many terms are used to describe the nature and extent of the groundwater resource. The level below which all the spaces are filled with water is called the water table. Above the water table lies the unsaturated zone. Here the spaces in the rock and soil contain both air and water. Water in this zone is called soil moisture. The entire region below the water table is called the saturated zone, and water in this saturated zone is called Groundwater.

Groundwater is the source of about 90% of the country's drinking water. In rural areas, almost all the water supply comes from groundwater and more than one-third of our 100 largest cities depend on it for at least part of their supply. Historically, groundwater has been considered to be safe to drink.

However, of late groundwater is becoming contaminated with industrial effluents discharged on land and septic systems, as well as illegal and uncontrolled hazardous waste sites are involved in contaminating the ground water. Once contaminated it is difficult if not impossible to restore the groundwater.

The total quantity of groundwater on Earth is estimated as more than 50 million cu.km of this, 4 million cu.km. are considered as a reasonable quantity of fresh water, that could be exploited, which excludes water that will not drain from small pore spaces, saline water and water lying deep in confined aquifers.

The total groundwater reserves of India up to a depth of 300 meters are estimated to be at 3,700 million-hectare meters (Mha-m) and the usable groundwater at around 42 Mha-m, per year. Out of this, 27.37% is exploited. The state of Andhra Pradesh has a usable potential of 2.21mham/y.

In addition, ground water supplies are being stressed by increasing demand for water as the world's population continues to grow and communities seek short-term solutions to this rising demand. As demand for potable water increases and as supplies decrease, ground water may be relied upon more heavily as a source. Consequently, the availability of ground water now and in the future will be important; overuse of ground water may result in serious shortages in many areas, especially in water-scarce regions.

With the ever-increasing pressure of human population, there is severe stress on water resources. It is becoming scarce in rural as well as urban areas mainly due to reduction in infiltration rate as a result of deforestation in rural areas and large-scale paving of the surface in urban area. In India, though a huge quantity of surface water is available, the topography and other factors limit the storage of this water. Where the surface water is scarce, ground water assumes importance in the context of water supply as an alternative source. Due to over-exploitation of ground water in many areas the ground water levels show a declining trend, which in turn tends to increase both the investment cost and the operational cost.

Ground water acts as a reservoir by virtue of large pore space in earth materials. It also acts as a conduit, which can transport water over long distances, and as a mechanical filter, which improves water quality by removing suspended solids and bacterial contamination forming main source for rural domestic use.

It is replenished or recharged by precipitation through rain, snow sleet and hail. In some areas of the world, people face serious water shortage because groundwater is used faster than it is naturally replenished. In other areas groundwater is polluted by human activities.

## **1.2 Indian Scenario:**

In India, there is severe stress on water resources with the ever-increasing human population. The population in India is increasing at an annual rate of 1.7crores and by the year 2050 it is said that it may cross 150crores. In India, out of an annual rainfall of 4000 billion cubic meters in an area of 329 million hectares, 41 % (10,02,04 million) is retained as soil moisture and 9% (2,19,96 million) seeps in for recharging groundwater. Of the 40 % stream flow water, 8 % is used for irrigation, 2 % for domestic use, 4 % for industries, and about 12% for electricity generation.


India will be requiring about 1,2010,00 million cubic meters of water in the year 2050 A.D. to cater to the needs of about 150 crores population for food production, drinking water, domestic, industrial, navigational, environmental and ecological requirements due to which there is a great need to conserve water.

## **1.3 Pollution:**

Groundwater has been used everywhere in the world for a long time because of its easy accessibility and good quality. In urban areas, groundwater as a source of domestic, commercial and industrial water has greatly contributed to the development of cities. Groundwater in urban areas is sometimes contaminated with multiple contaminants at higher concentrations than in rural areas. For example, one of the most prevalent contaminants in urban groundwater, nitrate, is commonly the product of agricultural runoff due to the use of fertilizers in rural areas. In urban areas, however, fertilizers in agricultural fields are rather minor sources, but leaky sewage, septic tanks, industrial spillages, landfill leachates, and fertilizers used in gardens and parks are other, more common sources of nitrate. Those sources of nitrate can also become sources of other hazardous substances or health-related microorganisms. Other than nitrogen, there are many contaminants in urban groundwater including arsenic, fluoride, heavy metals, and volatile organic carbons. Several kinds of pharmaceuticals, N-nitroso dimethylamine (NDMA), and per fluorinated surfactants (PFSs) can also be detected in urban groundwaters.

## 1.4 Study Area:

The city of VIJAYAWADA is situated at Latitude  $16^{\circ}31'8.50''\text{N}$  & Longitude  $80^{\circ}37'17.38''\text{E}$  with an area of  $61.88 \text{ km}^2$ . Vijayawada (formerly Bezawada) is the second largest city in the Indian state of Andhra Pradesh and is a part of the state's capital region, Amaravati Capital Region. It is the administrative headquarters of the NTR district. Vijayawada lies on the banks of Krishna River surrounded by the hills of Eastern Ghats, known as Indrakeeladri Hills. It geographically lies on the center spot of Andhra Pradesh.[10] The city has been described as the commercial, political, cultural and educational capital of Andhra Pradesh, second largest city in Andhra Pradesh and is one of the fastest growing urban areas in India.

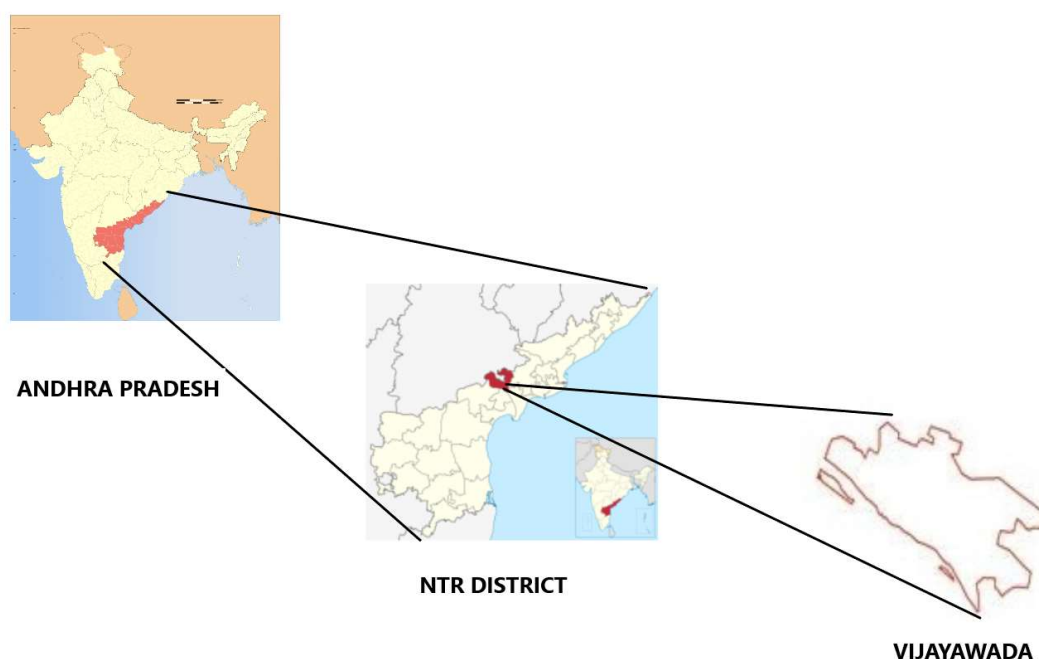


**Figure 1.1** Location of Vijayawada

### 1.4.1 Geography:

Vijayawada lies on the banks of Krishna River, covered by hills and canals and at an altitude of 11 m (36 ft) above sea level. Three canals originating from the north side of the Prakasam Barrage reservoir — Eluru, Bandar, and Ryves — flow through the city.



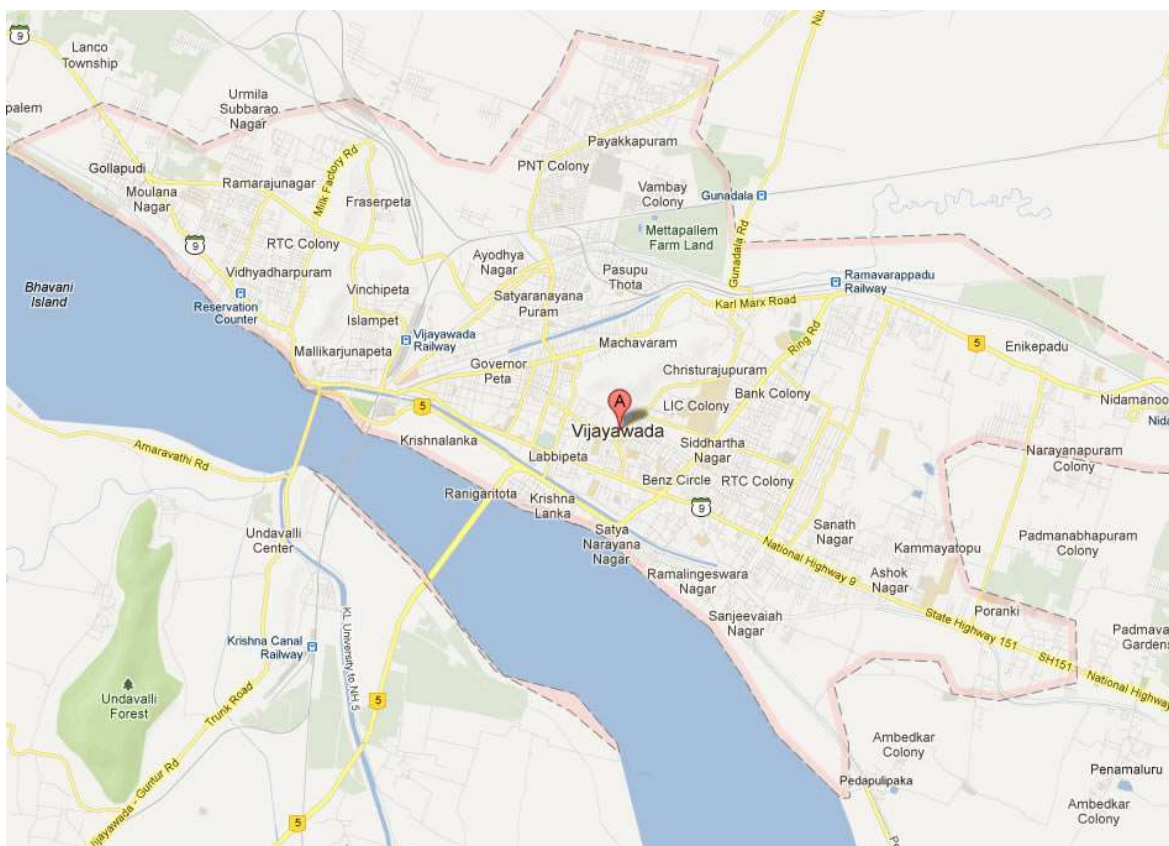

**Figure 1.2 Map of Vijayawada**

### **1.4.2 Demographics:**

The city today,

• Total area	: 61.88 sq. km.
• Population	1039518
• Males	527307
• Females	512211
• Sex Ratio	: 993
• Literacy	: 86.24%
• Water supply coverage	: 77 %
• Access to comprehensive sewage scheme	: 20%

One of every five households do not have access to latrine facility.

## **1.5 Scope of the Study:**

The scope of the study is to assess & acknowledge the ground water quality at various distinctly chosen locations within Vijayawada City.

### **1.5.1 Need for the Study:**

There are many reasons why a global groundwater quality assessment is needed:

- Human activities and climate variability are increasing the pressure on groundwater resources, but groundwater is an invisible resource that remains out of sight and out of mind for most people.
- Protection of our groundwater resources is necessary for protecting human health, maintaining food supplies and conserving ecosystems.
- Some regions and countries rely on naturally clean groundwater as advanced water treatment is economically infeasible. Knowing where to source clean groundwater, as well as understanding threats to this resource, is therefore important.

### **1.5.2 Objectives:**

The objectives of the project are mentioned below:

1. Preparation of thematic maps using Survey of India toposheet and satellite imagery.
2. Collection of ground water samples at different locations
3. Testing the quality of ground water samples of different locations
4. Assessment of quality of ground water samples with respect to the standards.
5. To find the integrity of each ground water sample collected at various location in Vijayawada and to work out ways for the same for domestic purposes.
6. Identification of recharge structure sites & locating the wells in a particular area using GIS application.
7. Preparation of final ground water prospectus maps to narrow down the area of ground water prospects for future exploration programs by integrating spatial and attribute database on ARC/VIEW & GIS Platform.

## **1.6 GIS:**

GIS is an acronym for Geographic Information Systems. In detail GIS are decision support computer-based systems for collecting, storing, presenting and analyzing spatial information. An information system is a set of processes executed on raw data, to produce information, which will be useful in decision making. GIS is a general-purpose technology for handling geographic data in digital form, and satisfying the following specific needs, among others.

- ❖ The ability to preprocess data from large stores into a form suitable for analysis including operation such as reformatting, change of projection, resampling and generalization.
- ❖ Direct support for analysis and modeling such that, form of analysis calibrations of models, forecasting and prediction all handled through instructions to the GIS.

Post processing of results, including such operations is reformatting tabulation, report generation and mapping. The GIS or geographic features are combined from map features

- a) Point
- b) Polygon
- c) Line

### **1.6.1 Components of GIS:**

Geographical information systems have important components like,

- ❖ Computer hardware
- ❖ Software modules
- ❖ The organization aspects.

#### **1.6.1.1 Computer Hardware:**

The Hardware components of a GIS include – control processing unit (CPU) which is linked to mass storage units such as hard disk drives and tape drives, peripherals such as digitizer or scanner, printer or plotter and visual display unit (VDU) shows the major hardware components of a GIS.

### **1.6.1.2 GIS Software Modules:**

The software package for a GIS consists of four basic technical modules,

- ❖ Data input and verification
- ❖ Data storage and Database Management
- ❖ Data transformation and manipulation.
- ❖ Data output and presentation.

## **1.6.2 Data Structures**

In GIS the Data Structure is of 2 types,

**1.6.2.1 Raster Data Structure:** It is the cellular organization of spatial data. The Simplest raster data structure consists of an array of grid cells.

- a) Simple Raster Array.
- b) Hierarchical Raster structures.

**1.6.2.2 Vector Data Structure:** Vector representation is mainly based on the three Main geographical entities points, lines and polygon.

- a) Whole polygon structure.
- b) Dual independent map encoding file structure
- c) Arc- node structure.
- d) Relational structure.
- e) Digital line graphs.

## **1.6.3 Spatial Database Creation:**

In GIS, topology is the term used to describe the geometric characteristic of objects, which do not change under transformations and are independent of any coordinate system. The topological characteristics of an object are also independent of scale of measurement.

Topology as it relates to spatial data and non-spatial data consists of three elements, namely adjacency, containment and connectivity. Broadly, topology can be explained in two ways. Topology consists of metric aspects of spatial relations, such as size, shape, distance and direction. Many spatial relations between objects are topological in nature, including adjacency, containment and overlap.

The geometric relationship between spatial entities and corresponding attributes are very crucial for spatial analysis and integration in GIS. In topology creation both the spatial and attribute data are linked from which different parameter maps are generated. These maps depict the spatial distribution of non-spatial information on spatial locations. The spatial database relevant for this study is Location map.

### 1.6.3 Attribute Database Creation:

Attributes are the characteristics of the map features and hold the descriptive information about the geographic features. Attributes are the non-spatial data associated with time and area entities.

Theme	Data Type	Description
City Boundary	Polygon	City Boundary
Major Roads	Line	-
Railway Lines	Line	-
Internal Roads	Line	-
Buildings	Point	Building types like Government, Educational, Worship, Commercial, Residential, Hotel & Emergency


**Table 1.1** Attribute notations

## 1.7 Maps:

### 1.7.1 Base Map:

The study area base Map is prepared by using Survey of India topographic maps on 1:50,000 scale. All the settlements, road network, water bodies and forest areas are taken into consideration. By comparing the Survey of India topographic maps with that of the satellite image the size of all the settlements are increased and updated. The aerial extent of the study area is 1171sq. km. The Base Map contains the following details.

1. Rivers/Streams
2. All water bodies both perennial and ephemeral
3. Canals
4. National highways
5. State highways
6. Metalled and unmetalled roads connecting all the habitations
7. Railways
8. Cities/major towns/villages.
9. International, State, District, Taluk/Tehsil boundaries. (from Toposheet).

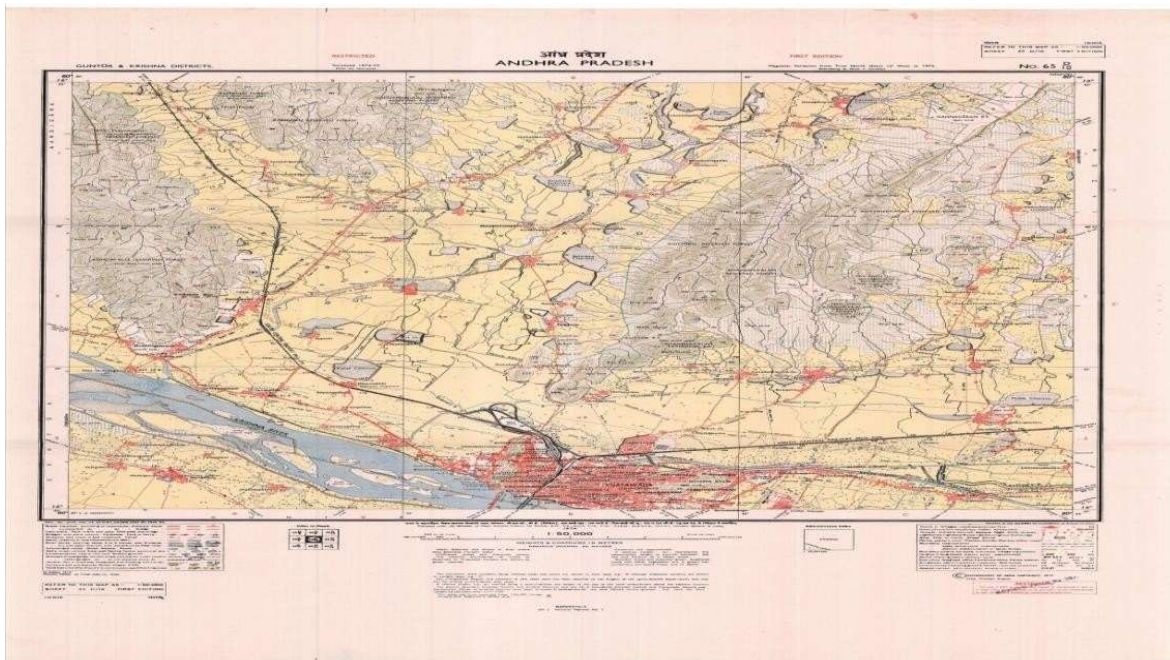

**Figure 1.3** Vijayawada Toposheet/Base Map

**CHAPTER 2**  
**LITERTATURE REVIEW**

## **CHAPTER 2**

### **LITERATURE REVIEW**

Recently various authors carried out extensive studies on ground water quality and its suitability for various purposes. Application of agricultural chemicals, dumping industrial and domestic wastes at the land surface or within the unsaturated zone may have considerable impact on the groundwater quality.

#### **2.1 Literature 1:**

Assessment of water quality using GIS techniques and water quality index in reservoirs affected by water diversion - 2020

**Authors:** Francis I. Oseke , Geophery K. Anornu , Kwaku A. Adjei , Martin O. Eduvie

- Samples collected were analyzed for different chemical properties.
- The obtained values were evaluated and compared with the standard permissible limits.
- There are many factors capable of influencing the water chemistry of the receiving region, such as the diversion route dynamics.
- The water should be continuously monitored and its quality preserved.

#### **2.2 Literature 2:**

Water quality analysis of Bhadravathi taluk using GIS - 2012

**Authors:** Rajkumar V. Raikar, Sneha M K

- The paper presents a case study on the water quality analysis carried out at the Bhadravathi Taluk, Karnataka, India.
- Geographic information system (GIS) is used to represent the spatial distribution of the parameters and raster maps were created.
- The maps showing the spatial distribution of various physico-chemical parameters are developed using GIS facilitated in identifying the potential zones of drinking water quality.



## 2.3 Literature 3:

Use of Geographic Information Systems (GIS) in Water Resources - 1996

**Authors:** Vassilios A. Tsihrintzis , Rizwan Hamid

- GIS applications are presented including surface hydrologic and groundwater modeling, etc. for urban and agricultural areas, and other related applications.
- In order to stress the importance of GIS in water resources, applications related to this area are addressed and evaluated for efficient future research and development.
- Current GIS applications are presented including surface hydrologic for urban and agricultural areas, and other related applications.

## 2.4 Literature 4:

“Groundwater potential in a semi-arid region” of A.P using GIS

**Author:** K. S. R. MURTHY

. Continuous and adequate supplies of potable water from ground reservoirs are important for sustained agriculture, industry and domestic use throughout huge semi-arid regions of India. The present paper describes an approach to investigating groundwater potential over extensive geographical areas and illustrates its potential with reference to watershed planning in the large Varaha River Basin (VRB), Andhra Pradesh, India. The method involves the creation of a systematic database of information from satellite data for reconnaissance survey before going for field exploration. Colour composite images from Landsat Thematic Mapper and Indian Remote Sensing (IRS) satellite were used to interpret various thematic maps of the Varaha river basin. SPOT 1 MLA data of band 3 on a 1:250 000 scale was used for improving the accuracy of interpretation of topographic units due to its higher resolution and stereo coverage. Slope and other coverage were derived from topographic maps

## 2.5 Literature 5:

” Geomorphological and Ground Water Study in Eastern Doon Valley and its surrounding” Indian Institute of Remote Sensing (NRSA).

**Authors:** Sri S.K SRIVASTAV

The present study has been undertaken to study the geomorphology and delineates the prospective ground water sources in the Eastern Doon valley, and its surroundings falling in the newly formed state of Uttaranchal for this purpose, the satellite imagery (PAN and LISS III) provided by IRS have been digitally enhanced using various techniques to improve the visual interpretability. These enhanced images were visually interpreted to group different landform and geomorphic units existing in the area and to understand the process of their evolution other parameters which control the occurrence and movement of ground water, such as Lithology / Rock type, Structure Land use/Land-cover, drainage density were also interpreted using satellite imagery in conjunction with the existing maps and literature, and different overlays were prepared. Well data were collected from different government departments and analysed. Based upon the well data, different maps like static water table map aquifer thickness map, well discharge map, and well yield factor map were prepared.

## 2.6 Literature 6:

Use of Geographic Information Systems (GIS) in Water Resources - 1996

**Authors:** Vassilios A. Tsihrintzis , Rizwan Hamid

- GIS applications are presented including surface hydrologic and groundwater modeling, etc. for urban and agricultural areas, and other related applications.
- In order to stress the importance of GIS in water resources, applications related to this area are addressed and evaluated for efficient future research and development.


Current GIS applications are presented including surface hydrologic for urban and agricultural areas, and other related applications.

## **CHAPTER 3**

### **METHODOLOGY**

## **CHAPTER 3**

### **METHODOLOGY**

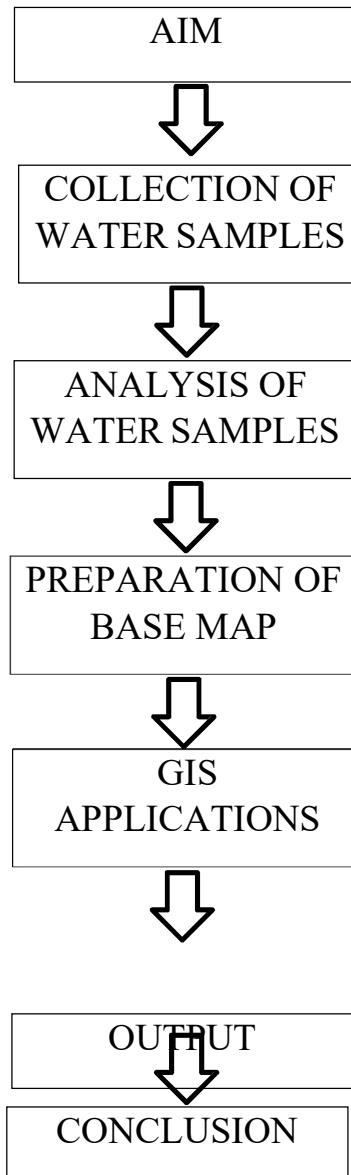

### 3.1 Study Area Selection:

Three samples are collected from each of the sixteen locations identified in Vijayawada city and are analyzed in the laboratory. The samples are collected in the months of March-April 2022

S.No.	Location	Latitude	Longitude
1	Patamata	16.4950° N	80.6618° E
2	Gandhi Nagar	23.2156° N	72.6369° E
3	Machavaram	16.5193° N	80.6522° E
4	Nidamanuru	16.5094° N	80.7203° E
5	Labbipet	16.5033° N	80.6389° E
6	Moghalrajpuram	16.5060° N	80.6415° E
7	Gundala	16.5233° N	80.6688° E
8	Krishna Lanka	16.5062° N	80.6225° E
9	Auto Nagar	16.5017° N	80.6779° E
10	Patamatalanka	16.4947° N	80.6535° E
11	Governorpet	16.5139° N	80.6293° E
12	Enikepadu	16.5142° N	80.7058° E
13	Kanuru	16.2858° N	81.2546° E
14	Ramavarappadu	16.5256° N	80.6843° E
15	Gollapudi	16.5400° N	80.5828° E
16	Ayodhya Nagar	21.1144° N	79.1079° E

**Table 3.1** Details of Sampling Location and Coordinates

### 3.2 Sample Collection:

The Ground water samples have been collected from fifteen locations in Vijayawada. The collected samples were labelled properly indicating the exact coordinates of point of collection and are used to plot on prepared Thematic Map based on the Toposheet (Figure 1.3). The base map or toposheet of Vijayawada is prepared by Survey of India, Hyderabad.

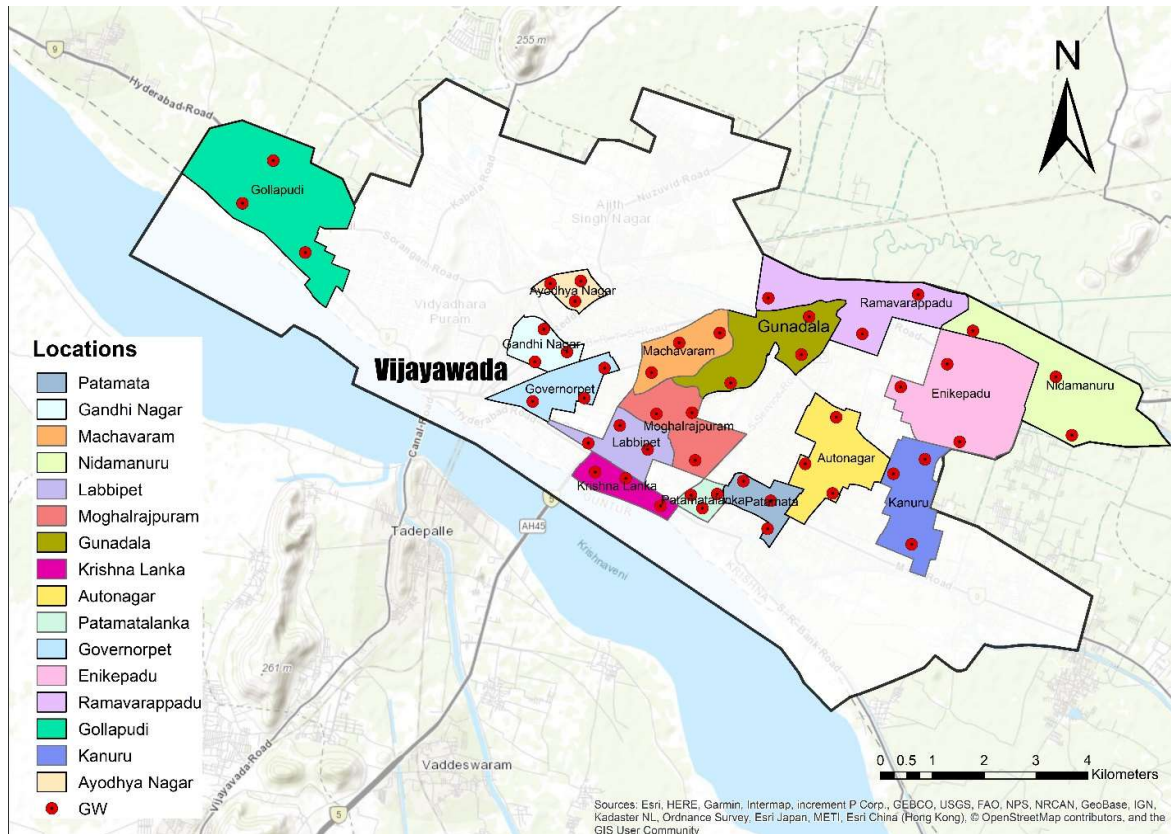


Figure 3.1 Sample locations on Thematic Map

### 3.2.1 Collection of water samples at different locations:

Every sample collecting location coordinates are captured by geo tagging snapshot.



**CHAPTER 4**  
**ANALYSIS OF WATER SAMPLES**



## CHAPTER 4

### ANALYSIS OF WATER SAMPLES

#### 4.1 Parametric Analysis:

The parametric analysis carried out to assess the ground water quality are **Physical and Chemical Parameters**.

##### 4.1.1 Chemical Tests:

Chemical Tests performed for water analysis:

Test Conducted	Units	Principle of the method
pH	-	Digital pH meter.
Alkalinity	mg/L CaCO <sub>3</sub>	Titrate with stand. H <sub>2</sub> SO <sub>4</sub> using Phenolphthalein indicator.
Electrical Conductivity	μmhos/cm	Digital conductivity meter.
Chlorides	mg/L	Titration with stand. AgNO <sub>3</sub> using K <sub>2</sub> Cr <sub>2</sub> O <sub>7</sub> as indicator.
Total Hardness	mg/L	Titration with stand. EDTA using indicator & 1ml of Ammonia buffer Sol.
Permanent Hardness	mg/L	Titration with stand. EDTA using Eriochrome black T indicator & 1ml of Ammonia buffer Sol.
Temporary Hardness	mg/L	Presence of bicarbonates of calcium and magnesium ions.
Calcium (Ca)	mg/L	Titration with stand. EDTA using murexide indicator & 1ml of Sodium hydroxide buffer Sol.
Magnesium (Mg)	mg/L	Titration with stand. EDTA using murexide indicator & 1ml of Sodium hydroxide buffer Sol.
Sulphate (SO <sub>4</sub> )	mg/L	quantitative precipitation by barium chloride

**Table 4.1** Chemical Tests

#### 4.1.2 Physical Tests:

Physical Tests performed for water analysis:

Test Conducted	Units	Principle of the method
Colour	-	Colour in water may be caused by the presence of minerals such as iron and manganese or by substances of vegetable origin such as algae and weeds.
Turbidity	NTU	An infrared diode shines infrared light into the medium.
Total Solids	mg/L	Evaporation.
Total Suspended Solids	mg/L	Evaporation.
Total Dissolved Solids	mg/L	Evaporation.
Odour	-	Odour and taste are associated with the presence of living microscopic organisms; or decaying organic matter including weeds, algae; or industrial wastes containing ammonia, phenols, halogens, hydrocarbons.
Taste	-	

**Table 4.2** Physical Tests

## 4.2 Experimental Procedures:

### 4.2.1 Determination of pH:

The effect of pH on the chemical and biological properties of liquids makes its determination very important. It is one of the most important parameters in water chemistry and is defined as  $-\log [H^+]$ , and measured as intensity of hydrogen ion concentration on a scale ranging from 0-14. If free  $H^+$  are more it is expressed as acidic (i.e.,  $pH < 7$ ) and if  $OH^-$  ions are more than it is expressed as alkaline (i.e.,  $pH > 7$ ).

In natural waters, pH is governed by the equilibrium between carbon dioxide / bicarbonate / carbonate ions and ranges between 4.5 and 8.5 although mostly basic. It tends to increase during the day largely due to the photosynthetic activity (consumption of carbon dioxide) and decreases during night due to respiratory activity. Wastewater and polluted natural waters have pH values lower or higher than 7 based on the nature of the pollutant.

#### Apparatus:

Glass electrode, Reference electrode (mercury/calomel or silver/silver chloride) and pH meter.

#### Procedure:

Electrometric method: pH is determined by measuring the Electromotive Force (E.M.F) of a cell comprising an indicator electrode (an electrode responsive to hydrogen ions such as a glass electrode) immersed in the test solution and the reference electrode (usually a mercury/calomel electrode). Contact between the test solution and the reference electrode is usually obtained by means of a liquid junction, which forms a part of the reference electrode. E.M.F of this cell is measured with a pH meter, that is, a high impedance voltmeter calibrated in terms of pH. The electrode is allowed to stand for 2 minutes to stabilize before taking reading for reproducible results (at least  $\pm 0.1$  pH units).

#### **4.2.2 Determination of Turbidity:**

Insoluble particles of soil, inorganic and organic materials and other micro-organisms impede (obstruct) passage of light by scattering and absorbing the light rays. The interference to passage of light is turbidity. It is usually caused by the finely dissolved and sometimes suspended particles of clay loam sand and microscopic organisms all in suspension.

Turbidity is measured photometrically by determining the quantity of light of given intensity absorbed / scattered.

Jackson turbidity meter and Nephelo turbidity meter in generally used to measure turbidity of water samples. Jacksons turbidity meter in generally is based on light absorption and nephelo turbidity meter is based on intensity of light scattered by the sample, taking a reference with standard turbidity meter suspensions.

Nephelometric turbidity meter is generally used for samples with low turbidity and expressed as NTU or mg/lit. For portable water allowable turbidity is between 5 to 10 mg/lit.

#### **Apparatus:**

1. Nephelometric turbidity meter; 2. Sample Tubes.

#### **Procedure:**

1. Switch on the instrument and allow sufficient warm-up period.
2. Take distilled water or blank solution in the test tube holder and close the lid. Make sure that the mark on the test tube coincides with mark on the panel.
3. Select required range for measurement.
4. Adjust the displayed to '000' by adjusting set zero knob.
5. Remove the test tube containing distilled water and insert another test tube containing standard solution (say 100 NTU or 400 NTU). Place it in test tube holder.
6. Adjust the calibrate knob so that the display reach the standard solution value.
7. Again check '0' display with distilled water. The instrument is now calibrated.

Place the given sample whose turbidity is to be determined in the test tube and take the reading in NTU.

### 4.2.3 Determination of Alkalinity:

Alkalinity of water is a measure of its capacity to neutralize acids. It is primarily due to salts of weak acids, although weak or strong bases may also contribute. Alkalinity is significant in many uses and treatments of natural waters and wastewaters. Because the alkalinity of many surface waters is primarily a function of carbonate, bicarbonate, and hydroxide content, it is taken as an indication of the concentration of these constituents.

It is expressed in terms of  $\text{CaCO}_3$  equivalent to hydrogen ions neutralized. The major portion of alkalinity in natural water is caused by carbonates, bicarbonates and hydroxides which may be ranked in order of their association with high pH values.

Highly alkaline water leads to caustic embrittlement and causes deposition of precipitates and boiler tubes. Bicarbonates of calcium and magnesium include temporary hardness to water. Boiler water always contains carbonates and hydroxide alkalinity, chemically treated water (lime or lime soda ash softening water) will be alkaline due to the presence of carbonates and excess hydroxide. High alkalinity in natural water will favor the growth of algae and phytoplankton.

#### Apparatus:

1. Burette
2. Pipette
3. Erlenmeyer flasks
4. Indicator solutions

#### Reagents:

1. Standard Sulphuric Acid (0.02 N)
2. Phenolphthalein indicator
3. Methyl orange indicator

#### Procedure:

Phenolphthalein Alkalinity:

1. Take 25ml of sample in a conical flask.
2. Add 3-4 drops of phenolphthalein indicator. If the pH of sample is above 8.3, sample turns pink.
3. Titrate with 0.02 N  $\text{H}_2\text{SO}_4$  in a burette till the colour disappears.
4. Note down the volume of  $\text{H}_2\text{SO}_4$  added ( $V_1$ )

**Calculation:** Phenolphthalein alkalinity in mg/L as  $\text{CaCO}_3 = \frac{V \cdot N \cdot 50 \cdot 1000}{\text{Volume of sample taken}}$

#### 4.2.4 Determination of Electric Conductivity:

The electrical conductivity is a total parameter of dissolved, dissociated substances. Its value depends on the concentration and degrees of dissociation of the ions as well as the temperature and migration velocity of the ions in the electric field.

##### **Apparatus:**

1. Conductivity meter with measuring cell;
2. Beaker;
3. Thermometer

##### **Procedure:**

Note: If standard KCl solution conductivity is known at different temperature. This calibration method is preferable.

1. Select COND mode
2. After thoroughly cleaning, immerse the cell in the standard solution say 0.1N KCl which has specific conductivity of the order of 0.01412 at 300C. ( $=14.12\mu\text{s}$ )
3. Select 20ms range (select range as per standard KCl solution conductivity).
4. Set conductivity (as per temperatures) using CELL constant POT and then lock using lock nut. Now calibration is over.

##### **CALIBRATION USING COND (25 0C) MODE:**

Note: If standard KCl solution conductivity is not known at different temperature (only at 250° C specific conductivity known). This calibration method is preferable.

1. Select TEMP mode
2. Set temperature of standard solution using TEMP
3. Select COND (250° C) mode
4. After thoroughly cleaning, immerse the cell in the standard solution, say 0.1N KCL (aqueous) which has specific conductivity of the order of 0.01288 = ( $12.88\mu\text{s}$ ) at 250C
5. Select 20ms range.
6. Set conductivity (as per 250° C temperature) using CELL constant POT and then lock using lock nut. Now calibration is over.

#### 4.2.5 Determination of Total Solids, Total Suspended Solids & Total Dissolved Solids:

Normally the sewage water sample contains 99.9 % water and 0.1% solids. The term solids in water and waste water for a sanitary engineer refers to as the matter which remains as a residue after evaporation and subsequent drying at specified temperature of 100 to 105 C. the total solids is considered as the sum of dissolved solids and suspended solids.

- 1) **Total Solids:** They indicate both organic and inorganic matter. Organic solids are also called as volatile solids and inorganic solids are also called non-volatile solids.
- 2) **Suspended Solids:** These are of two types: settleable and non-settleable solids. Settleable solids are those which will settle down in the sedimentation tank with a usual detention period of 1 to 3 hours. Non-settleable solids will not settle down and are usually volatile in nature.
- 3) **Dissolved Solids:** They are present in dissolved state and can be determined indirectly.

##### I. **Total Solids:**

###### **Apparatus:**

1. Evaporating Dish (Gooch Crucible); 2. Oven (103° C); 3. Muffle Furnace (550 ± 50° C);
4. Weighing Balance

###### **Procedure:**

1. Take a clean crucible and make it completely dry in oven, cool it and take its initial weight as W1
2. Add 25 ml of well mixed sample to crucible.
3. The sample is evaporated by heating at 100 to 103° C for 1 hour.
4. The residue left in the dish is weighed after cooling as W including weight of the dish.

$$\text{Total Solids in mg/L} = \frac{(W2 - W1) * 1000 * 1000}{25}$$

## **II. Suspended Solids:**

### **Apparatus:**

1. Vaporating Dish; 2. Oven (103° C); 3. Filter Paper; 4. Weighing Balance.

### **Procedure:**

1. Measure the initial eight of clean filter paper (F<sub>1</sub>).
2. 100 ml of sample is taken and passed through filter paper by placing on the funnel.
3. The filter paper is removed and dried in oven at 103° C.
4. It is cooled and final weight in notes as (F<sub>2</sub>).

$$\text{Suspended Solids in mg/L} = \frac{(F_2 - F_1) * 1000 * 1000}{25}$$

## **III. Dissolved Solids:**

### **Apparatus:**

1. Vaporating Dish; 2. Oven (103° C); 3. Filter Paper; 4. Weighing Balance.

### **Procedure:**

1. Determine the initial weight of the evaporating dish (D<sub>1</sub>)
2. Collect about 50 ml of filtrate from the above sample and pour it into the dish.
3. Place the dish along with the filtrate in an oven at 100 to 103° C and evaporate the filtrate sample. (Under any circumstance the sample should not be boiled).
4. When the sample is completely evaporated from the dish, take out from the oven, take out from the oven, cool to lab temperature and note down the weight of the dish as (D<sub>2</sub>).

$$\text{Dissolved Solids in mg/L} = \frac{(W_3 - W_1) * 1000 * 1000}{25}$$



#### 4.2.6 Determination of Chloride Content:

Chloride occurs in all natural waters in widely varying concentrations. Chloride in the form of chlorine ions is one of the major inorganic anions in water and waste water; in potable water the salty taste produced by chloride concentration is variable and dependent on the chemical composition of water. Some water containing 250mg/l may have a detectable salty taste if the cation is sodium. On the other hand the typical salty taste may be absent in water containing as much as 100mg/l, when the predominant cations are calcium and magnesium.

##### Apparatus:

1. Burette; 2. Pipette; 3. Conical flask

##### Reagents:

1. Chloride free distilled water
2. Potassium chromate indicator.
3. Standard silver nitrate (0.0141N)
4. Standard sodium chloride (0.0141N)

##### Procedure:

1. Take 25ml of sample in conical flask.
2. Adjust its pH between 7.0 and 8.0 either with sulphuric acid or sodium hydroxide solution. Otherwise AgOH is formed at high pH level.
3. Add 1ml of potassium chromate to get light yellow colour.
4. Titrate with standard silver nitrate solution till colour change from yellow to brick red.
5. Note down the volume of silver nitrate added (A).
6. If more quantity of potassium chromate is added, silver chromate may form too soon or not soon enough.
7. For better accuracy, titrate distilled water in the same manner.
8. Note the volume of silver nitrate added for distilled water (B).

##### Calculations:

$$\text{Chloride content of the given sample in mg/L} = \frac{(A-B) * \text{Normality of AgNO}_3 * 35.46 * 1000}{25}$$

#### 4.2.7 Determination of Total Hardness:

Total hardness is a measurement of the mineral content in a water sample that is irreversible by boiling. More specifically, total hardness is determined by the concentration of multivalent cations in water. These cations have a positive charge that is higher than 1+. Typically, cations have a charge of 2+. The most common cations present in hard water are  $Mg^{2+}$  and  $Ca^{2+}$ .

##### Apparatus:

1. Water sample;
2. Burette 50ml;
3. Glass funnel;
4. Pipette 1ml;
5. Flask;
6. Dropper;
7. Measuring cylinder

##### Reagents:

EDTA, Eriochrome Black-T, Ammonia Buffer, Distilled water.

##### Procedure:

1. Take a sample volume of 20ml (V ml).
2. Dilute 20ml of the sample in Erlenmeyer flask to 40ml by adding 20ml of distilled water.
3. Add 1 mL of ammonia buffer to bring the pH to  $10 \pm 0.1$ .
4. Add 1 or 2 drops of the indicator solution. If there is Ca or Mg hardness the solution turns wine red.
5. Add EDTA titrant to the sample with vigorous shaking till the wine red colour just turns blue.
6. Note the volume of titrant added ( $V_1$  ml).

##### Calculation:

$$\text{Total Hardness in mg/L} = \frac{V_1 * N * 100 * 1000}{25}$$

V = Volume of the sample taken, ml

$V_1$  = Volume of the titrant used for sample taken, ml

N = Normality of EDTA

#### 4.2.8 Determination of Permanent and Temporary Hardness:

When the soluble salts of magnesium and calcium are present in the form of chlorides and sulphides in water, we call it permanent hardness because this hardness cannot be removed by boiling.

We can remove this hardness by treating the water with washing soda. Insoluble carbonates are formed when washing soda reacts with the sulphide and chloride salts of magnesium and calcium and thus, hard water is converted to soft water.

##### Apparatus:

1. Burette, 2. Erlenmeyer flask, 3. Pipette, 4. Sample Bottle etc.

##### Procedure:

1. Take 100ml of water sample into a beaker and boil gently for 15-20 minutes.
2. Cool the solution then filter and wash the precipitate several times. Collect both the filtrate into a 250ml volumetric flask and level up to the mark with distilled water. Then, shake well.
3. Take 50ml of solution from volumetric flask with pipette and place into a conical flask.
4. Add 1-5ml  $\text{NH}_4\text{OH}/\text{NH}_4\text{Cl}$  buffer solution. It increases the pH level and should be 10. Check the pH with standardize pH meter.
5. Add 2-3 drops 0.1M Mg-EDTA solution and 3-4 drops Eriochrome Black T indicator. Then, shake well and the colour becomes wine red.
6. Fill up the burette with standardized 0.01M EDTA solution. Record the initial burette reading and titrate the water sample with this standard solution.
7. At the end point the colour of the solution turns into blue from wine red. Titrate carefully near the end point.
8. Take the final burette reading. Let, it is  $V_1$  ml.
9. Repeat the titration process at least three times.
10. You can run a blank titration for more accurate result. Let, it is  $V_2$  ml.

##### Calculation:

The 100ml sample water is dilute into a 250ml volumetric flask

Hence, 50ml dilute water =  $100 \times 50/250$  ml = 20ml sample water

Now, 20ml of sample water  $\equiv V \times 1.00\text{mg CaCO}_3$

$\therefore$  1000ml of sample water  $\equiv V \times 1.00\text{mg} \times 1000/20 \text{ CaCO}_3$

#### 4.2.9 Determination of Calcium and Magnesium:

One of the factors that establish the quality of a water supply is its degree of hardness. The hardness of water is defined in terms of its content of calcium and magnesium ions. Since an analysis does not distinguish between  $\text{Ca}^{2+}$  and  $\text{Mg}^{2+}$ , and since most hardness is caused by carbonate deposits in the earth, hardness is usually reported as total parts per million calcium carbonate by weight. A water supply with a hardness of 100 parts per million would contain the equivalent of 100 grams of  $\text{CaCO}_3$  in 1 million grams of water or 0.1 gram in one litre of water. In the days when soap was more commonly used for washing clothes, and when people bathed in tubs instead of using showers, water hardness was more often directly observed than it is now, since  $\text{Ca}^{2+}$  and  $\text{Mg}^{2+}$  form insoluble salts with soaps and make a scum that sticks to clothes or to the bath tub. Detergents have the distinct advantage of being effective in hard water, and this is really what allowed them to displace soaps for laundry purposes. Calcium in water will be analysed this week by EDTA titration and next week by atomic absorption analysis and the results compared.

##### Apparatus:

1. Burette, 2. Erlenmeyer flask, 3. Pipette, 4. Sample Bottle etc.

##### Procedure:

1. Take 25- or 50-ml sample in a conical flask
2. Add 1 ml NaOH to raise pH to 12.0 and add a pinch of murexide indicator.
3. Titrate immediately with EDTA till pink colour changes to purple. Note the volume of EDTA
4. used (A1).
5. Run a reagent blank. Note the ml of EDTA required (B1) and keep it aside to compare end
6. points of sample titrations.
7. Calculate the volume of EDTA required by sample,  $C1 = A1 - B1$ .

##### Calculation:

$$\text{Calcium as Ca in mg/L} = \frac{C1 * D * 1000}{25} * 0.4$$

Where

$C1$  = volume of EDTA used by sample (with murexide indicator)

$D$  = mg  $\text{CaCO}_3$  equivalent to 1 ml EDTA titrant

Magnesium hardness

Magnesium Hardness = Total hardness as  $\text{CaCO}_3$ , mg/L – Calcium hardness as  $\text{CaCO}_3$ , mg/L.

$$\text{Mg (mg/L)} = (\text{Total hardness (as } \text{CaCO}_3 \text{ mg/L)} - \text{Calcium hardness (as mg } \text{CaCO}_3 \text{ /L)}) \times 0.243$$

#### 4.2.10 Determination of Sulphate:

The determination of the Sulphate is possible using the Ca-ISE and EGTA as titrant. An excess of BaCl<sub>2</sub> is added to the water sample to precipitate the sulphate. The not reacted Ba-ions are back titrated with EGTA titrant. The titration curve shows two equivalence points. The first one corresponds to the Ca and the difference between the second and first EQ corresponds to the Ba. Mg is not determined with this titrant.

##### Reagent:

1. Titrant EGTA 0.05 mol/L; 2. BaCl<sub>2</sub> = 0.05 mol/L; 3. Buffer solution pH 10;
4. HCl = approx. 2 mol/L;

##### Procedure:

###### Blank titration

A blank titration has to be carried out before. To 40 mL dist. H<sub>2</sub>O are pipetted 5.00 ml of the BaCl<sub>2</sub> 0.05 mol/l solution into the glass beaker. After the addition of 0.5 mL of the Ca standard solution and 5 ml buffer pH 10 the solution is stirred for 3 min. The solution is then back titrated with the EGTA titrant to two EQ's. The difference between the EQ2-EQ1 is stored in the global memory M01.

###### Sample preparation

The water sample is pipetted into the glass beaker. The sample volume depends on the expected SO<sub>4</sub> concentration.

The pH is adjusted to pH 4 by adding carefully the HCl 2 mol/l. Then 5 ml of the BaCl<sub>2</sub> 0.05 mol/l solution is added to the sample. After three minutes of reaction time under stirring 5 ml of the buffer solution pH 10 are added. After additional three minutes of reaction time the sample is back titrated with the EGTA titrant to two EQ's.

##### Calculation:

$$\text{Result SO}_4 \text{ in mg/L} = \frac{((M01 - (EQ1) * T * Mmg * 1000}{25}$$

### 4.3 Testing of Water Samples in Laboratory:



## 4.8 Test Results:

Test Results from analysis of water samples of each individual location and their thematic map are shown below:

### 4.8.1 Location 1: Patamata


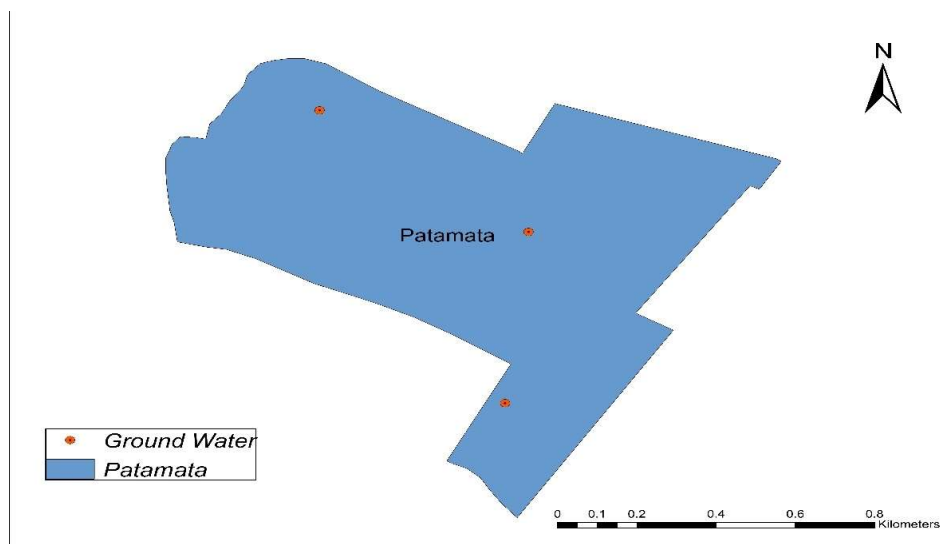


Figure 4.1 Patamata

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7.35	7.5	7.7	7.5
<b>TURBIDITY</b>	NTU	1.1	1.2	1.2	1.2
<b>TS</b>	mg/L	1598	1680	1723	1667
<b>TSS</b>	mg/L	17	7	11	24
<b>TDS</b>	mg/L	1581	1673	1712	1643
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	470	484	498	484
<b>CONDUCTIVITY</b>	µmhos/cm	2432	2574	2634	2527.69
<b>CHLORIDES</b>	mg/L	98	184	141	141.84
<b>TOTAL HARDNESS</b>	mg/L	597	657	619	624
<b>PERMANENT HARDNESS</b>	mg/L	91	128	167	128
<b>TEMPORARY HARDNESS</b>	mg/L	506	529	452	496
<b>Ca</b>	mg/L	151.6	164.8	178	165
<b>Mg</b>	mg/L	41.06	51.51	62.20	52
<b>SO4</b>	mg/L	10	12	14	12

Table 4.3 Test Results of Patamata

#### 4.8.2 Location 2: Gandhi Nagar

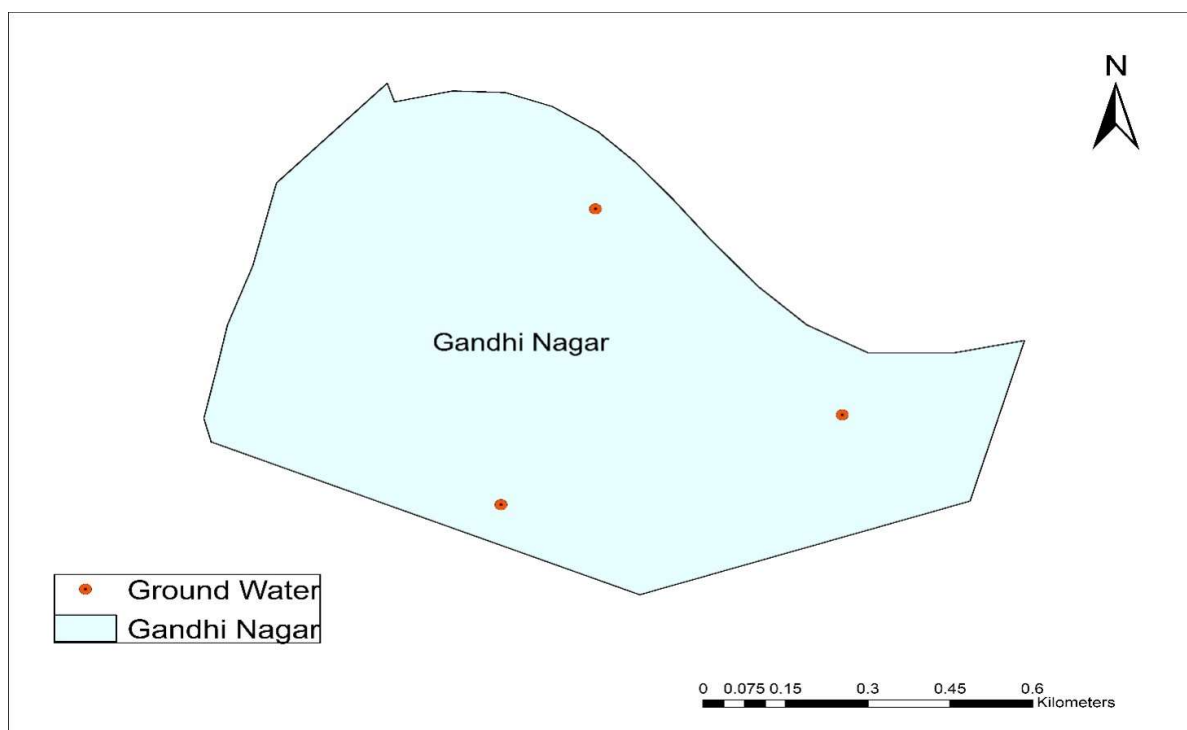


**Figure 4.2** Gandhi Nagar

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7	7.25	7.5	7.25
<b>TURBIDITY</b>	NTU	1.2	1.1	1.1	1.1
<b>TS</b>	mg/L	651	670	691	670
<b>TSS</b>	mg/L	12	13	10	13
<b>TDS</b>	mg/L	639	657	681	657
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	391	440	489	440
<b>CONDUCTIVITY</b>	µmhos/cm	983	1011	1048	1010.77
<b>CHLORIDES</b>	mg/L	101	141	181	143.9
<b>TOTAL HARDNESS</b>	mg/L	391	420	450	420
<b>PERMANENT HARDNESS</b>	mg/L	151	172	195	172
<b>TEMPORARY HARDNESS</b>	mg/L	240	248	255	248
<b>Ca</b>	mg/L	84.4	99.2	114	100.2
<b>Mg</b>	mg/L	34.26	41.79	49.81	42
<b>SO4</b>	mg/L	24	28	32	28

**Table 4.4** Test Results of Gandhi Nagar



### 4.8.3 Location 3: Machavaram

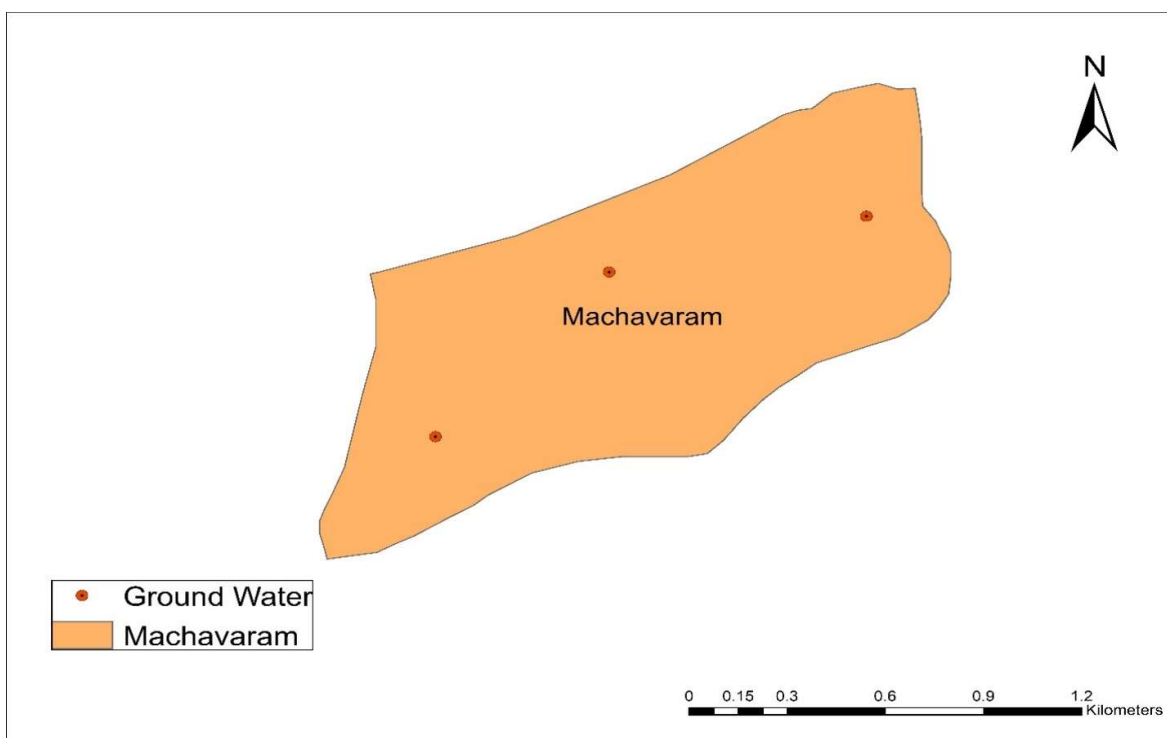


**Figure 4.3** Machavaram

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7.25	7.3	7.4	7.3
<b>TURBIDITY</b>	NTU	1.3	1.1	1.1	1.1
<b>TS</b>	mg/L	321	350	379	350
<b>TSS</b>	mg/L	10	17	11	16.37
<b>TDS</b>	mg/L	311	333	368	334
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	281	300	321	300
<b>CONDUCTIVITY</b>	µmhos/cm	478	513	566	512.82
<b>CHLORIDES</b>	mg/L	131	153	177	153.19
<b>TOTAL HARDNESS</b>	mg/L	571	576	642	596
<b>PERMANENT HARDNESS</b>	mg/L	161	180	201	180
<b>TEMPORARY HARDNESS</b>	mg/L	410	396	441	416
<b>Ca</b>	mg/L	75.6	83.2	91.6	85
<b>Mg</b>	mg/L	87.72	94.28	101.33	96
<b>SO4</b>	mg/L	29	32	34	32

**Table 4.5** Test Results of Machavaram

#### 4.8.4 Location 4: Nidamanuru

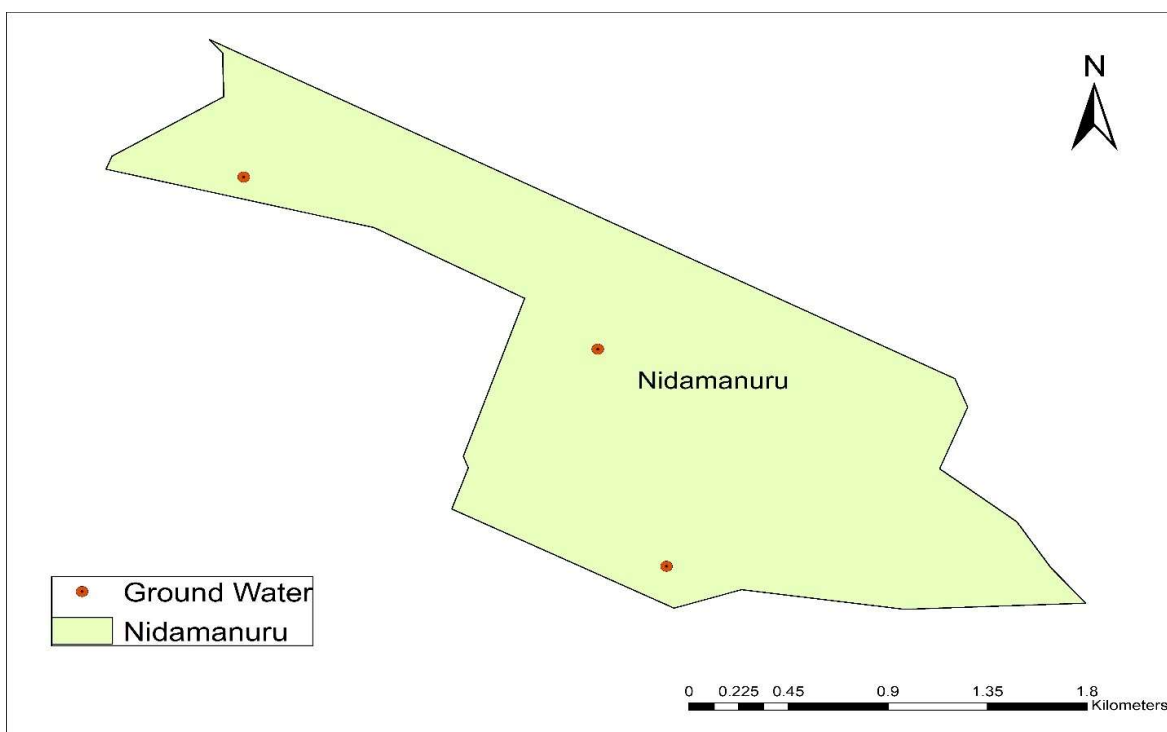


**Figure 4.4** Nidamanuru

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7.45	7.52	7.7	7.52
<b>TURBIDITY</b>	NTU	1.1	1.2	1.3	1.3
<b>TS</b>	mg/L	1621	1652	1684	1652
<b>TSS</b>	mg/L	14	13	13	8
<b>TDS</b>	mg/L	1607	1639	1671	1644
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	281	304	327	304
<b>CONDUCTIVITY</b>	µmhos/cm	2472	2522	2571	2529.23
<b>CHLORIDES</b>	mg/L	219	249	279	249.63
<b>TOTAL HARDNESS</b>	mg/L	561	549	631	580
<b>PERMANENT HARDNESS</b>	mg/L	287	308	331	308
<b>TEMPORARY HARDNESS</b>	mg/L	274	241	300	272
<b>Ca</b>	mg/L	128.4	136	144.4	136
<b>Mg</b>	mg/L	53.70	58.32	63.42	58.32
<b>SO4</b>	mg/L	12	16	20	16

**Table 4.6** Test Results of Nidamanuru

#### 4.8.5 Location 5: Labbipet

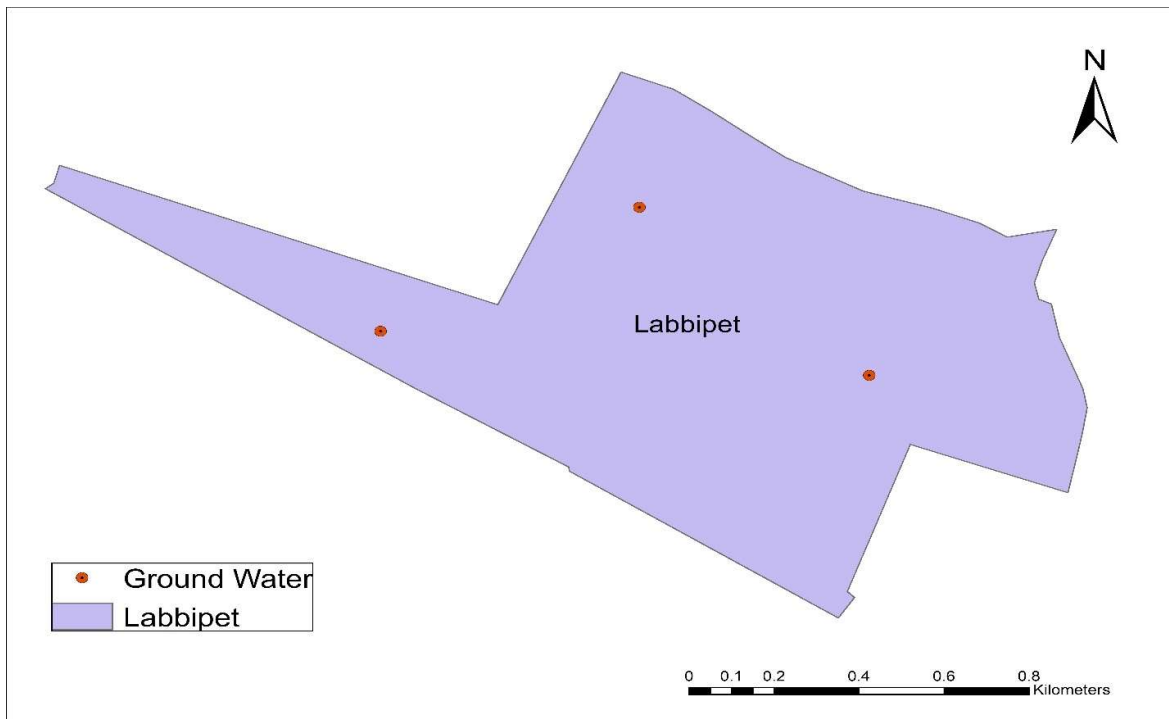


**Figure 4.5** Labbipet

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7	7.25	7.35	7.25
<b>TURBIDITY</b>	NTU	1.2	1.3	1.3	1.3
<b>TS</b>	mg/L	1321	1341	1361	1341
<b>TSS</b>	mg/L	12	9	10	4
<b>TDS</b>	mg/L	1309	1332	1351	1337
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	572	592	614	592
<b>CONDUCTIVITY</b>	µmhos/cm	2014	2049	2078	2056.92
<b>CHLORIDES</b>	mg/L	153	181	210	181.55
<b>TOTAL HARDNESS</b>	mg/L	579	592	606	592
<b>PERMANENT HARDNESS</b>	mg/L	156	188	221	188
<b>TEMPORARY HARDNESS</b>	mg/L	423	404	385	404
<b>Ca</b>	mg/L	142.4	147.2	152.4	147.2
<b>Mg</b>	mg/L	46.899	54.43	62.20	54.43
<b>SO4</b>	mg/L	32	38	44	38

**Table 4.7** Test Results of Labbipet

#### 4.8.6 Location 6: Moghalrajpuram

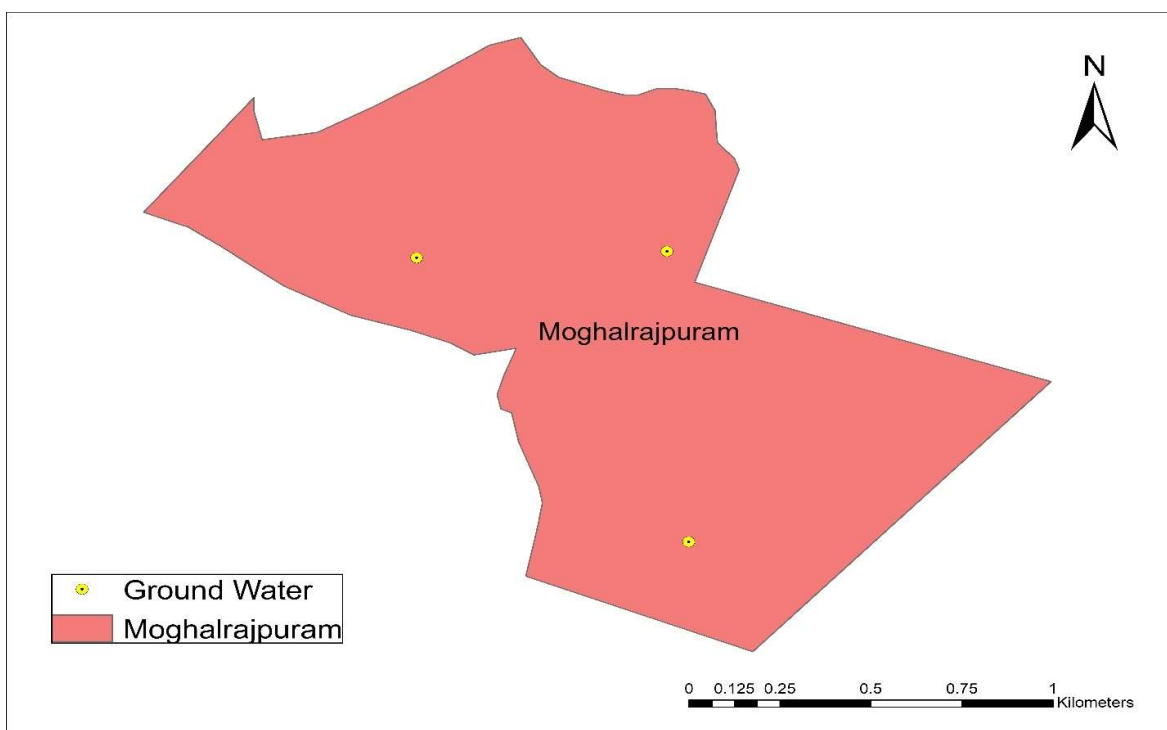


**Figure 4.6** Moghalrajpuram

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7.35	7.4	7.5	7.4
<b>TURBIDITY</b>	NTU	1.2	1.1	1.1	1.1
<b>TS</b>	mg/L	1530	1549	1631	1570
<b>TSS</b>	mg/L	13	12	12	19
<b>TDS</b>	mg/L	1517	1537	1619	1551
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	445	460	523	476
<b>CONDUCTIVITY</b>	μmhos/cm	2334	2365	2491	2386.15
<b>CHLORIDES</b>	mg/L	131	154	208	164.54
<b>TOTAL HARDNESS</b>	mg/L	310	326	385	340
<b>PERMANENT HARDNESS</b>	mg/L	101	119	171	130
<b>TEMPORARY HARDNESS</b>	mg/L	209	207	214	210
<b>Ca</b>	mg/L	73.6	80.4	105.6	86.4
<b>Mg</b>	mg/L	24.543	26.73	39.12	30.132
<b>SO4</b>	mg/L	98	102	106	102

**Table 4.8** Test Results of Moghalrajpuram

#### 4.8.7 Location 7: Gunadala

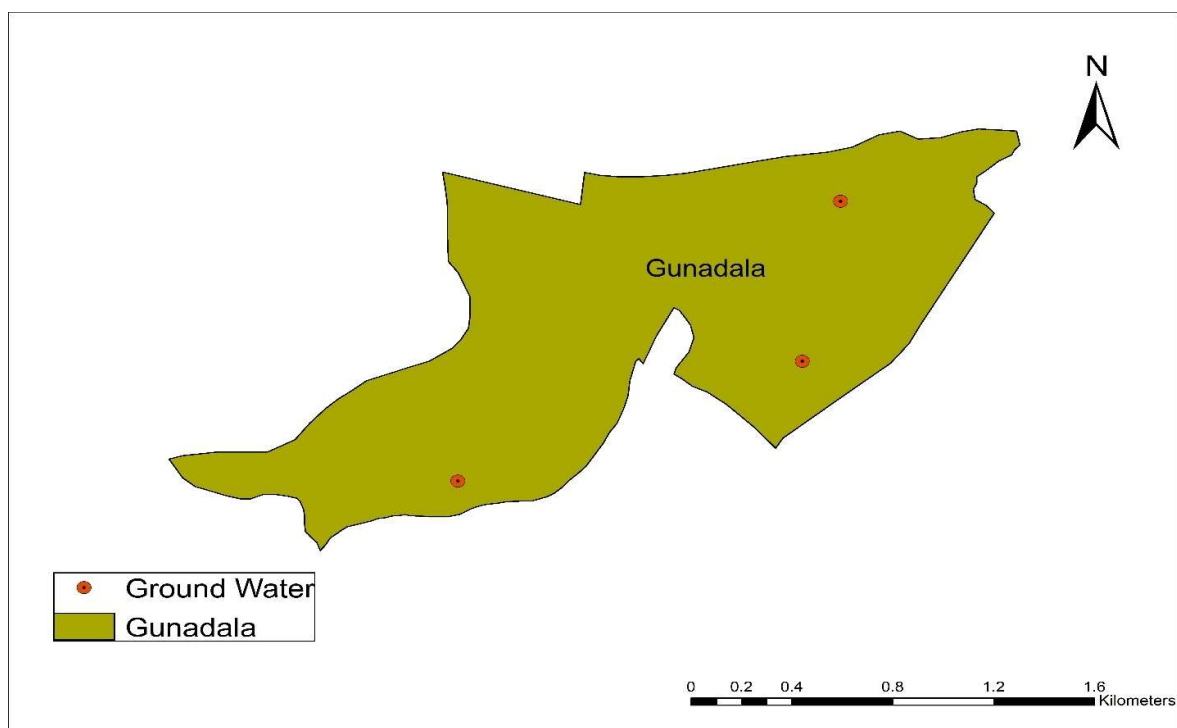

**Figure 4.7** Gundala

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7.25	7.3	7.7	7.42
<b>TURBIDITY</b>	NTU	1.1	1.2	1.2	1.2
<b>TS</b>	mg/L	755	770	844	789
<b>TSS</b>	mg/L	13	12	17	7
<b>TDS</b>	mg/L	742	758	827	782
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	381	395	449	408
<b>CONDUCTIVITY</b>	µmhos/cm	1142	1166	1272	1203.08
<b>CHLORIDES</b>	mg/L	211	235	211	241.13
<b>TOTAL HARDNESS</b>	mg/L	560	580	649	596
<b>PERMANENT HARDNESS</b>	mg/L	271	287	354	304
<b>TEMPORARY HARDNESS</b>	mg/L	289	293	295	292
<b>Ca</b>	mg/L	160.4	166	197.2	174.4
<b>Mg</b>	mg/L	31.34	34.02	51.516	38.88
<b>SO4</b>	mg/L	10	14	18	14

**Table 4.9** Test Results of Gunadala

#### 4.8.8 Location 8: Krishna Lanka


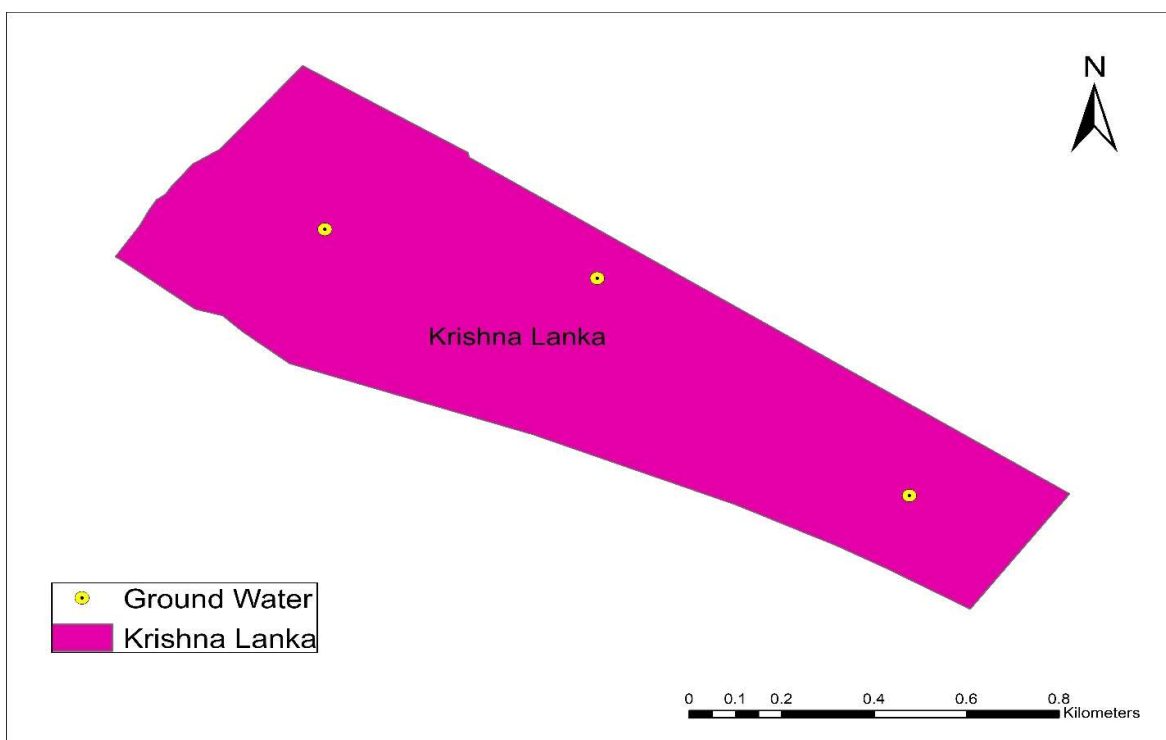


Figure 4.8 Krishna Lanka

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7.2	7.1	7.5	7.3
<b>TURBIDITY</b>	NTU	1	1.1	1.1	1.1
<b>TS</b>	mg/L	751	773	871	798
<b>TSS</b>	mg/L	15	14	9	12
<b>TDS</b>	mg/L	736	759	862	786
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	480	501	569	516
<b>CONDUCTIVITY</b>	μmhos/cm	1132	1168	1326	1209.23
<b>CHLORIDES</b>	mg/L	101	111	196	136.16
<b>TOTAL HARDNESS</b>	mg/L	752	764	837	784
<b>PERMANENT HARDNESS</b>	mg/L	106	119	202	142
<b>TEMPORARY HARDNESS</b>	mg/L	646	645	635	642
<b>Ca</b>	mg/L	80.8	86.4	116.4	94.4
<b>Mg</b>	mg/L	124.41	127.81	147.25	133.16
<b>SO4</b>	mg/L	32	36	40	36

Table 4.10 Test Results of Krishna Lanka

#### 4.8.9 Location 9: Auto Nagar

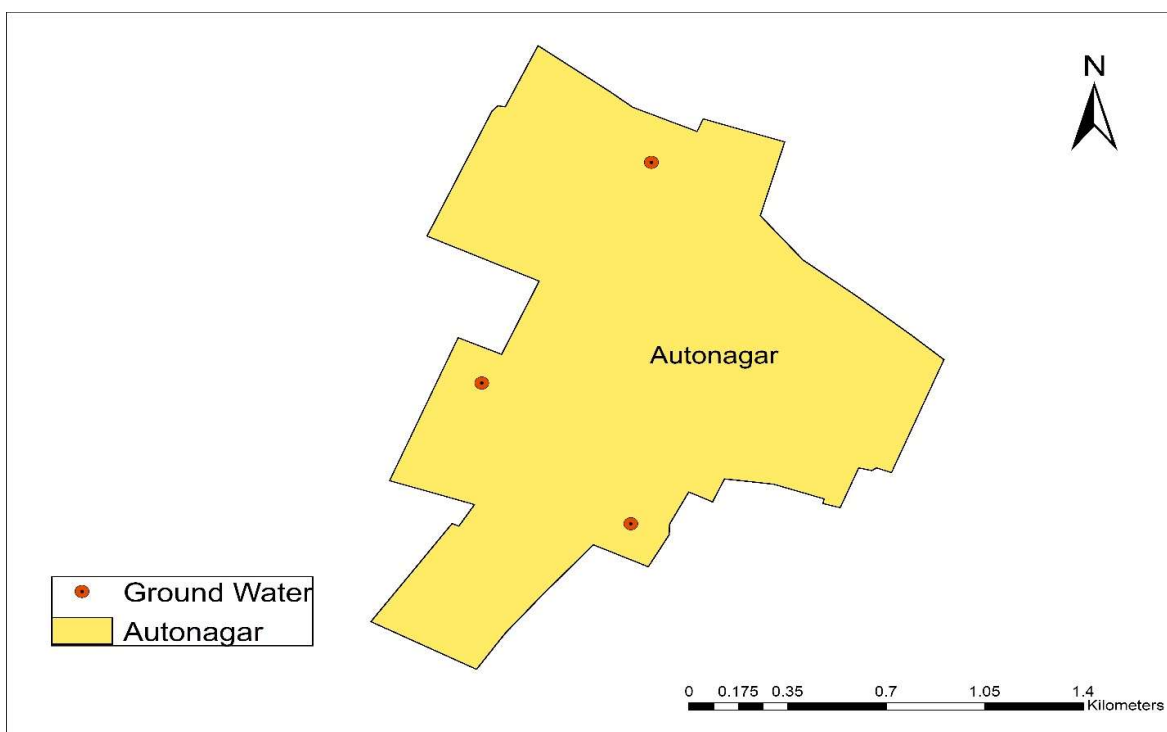


**Figure 4.9** Auto Nagar

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7.45	7.5	7.7	7.52
<b>TURBIDITY</b>	NTU	1.2	1.3	1.3	1.3
<b>TS</b>	mg/L	997	1001	1081	1026
<b>TSS</b>	mg/L	20	20	12	7
<b>TDS</b>	mg/L	997	981	1069	1019
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	591	602	681	624
<b>CONDUCTIVITY</b>	µmhos/cm	1503	1509	1645	1567.69
<b>CHLORIDES</b>	mg/L	191	205	282	226.94
<b>TOTAL HARDNESS</b>	mg/L	699	710	789	732
<b>PERMANENT HARDNESS</b>	mg/L	172	186	250	202
<b>TEMPORARY HARDNESS</b>	mg/L	527	524	539	530
<b>Ca</b>	mg/L	116.4	121.6	150.8	129.6
<b>Mg</b>	mg/L	91.36	95.01	111.53	99.14
<b>SO4</b>	mg/L	24	28	32	28

**Table 4.11** Test Results of Auto Nagar

#### 4.8.10 Location 10: Patamatalanka

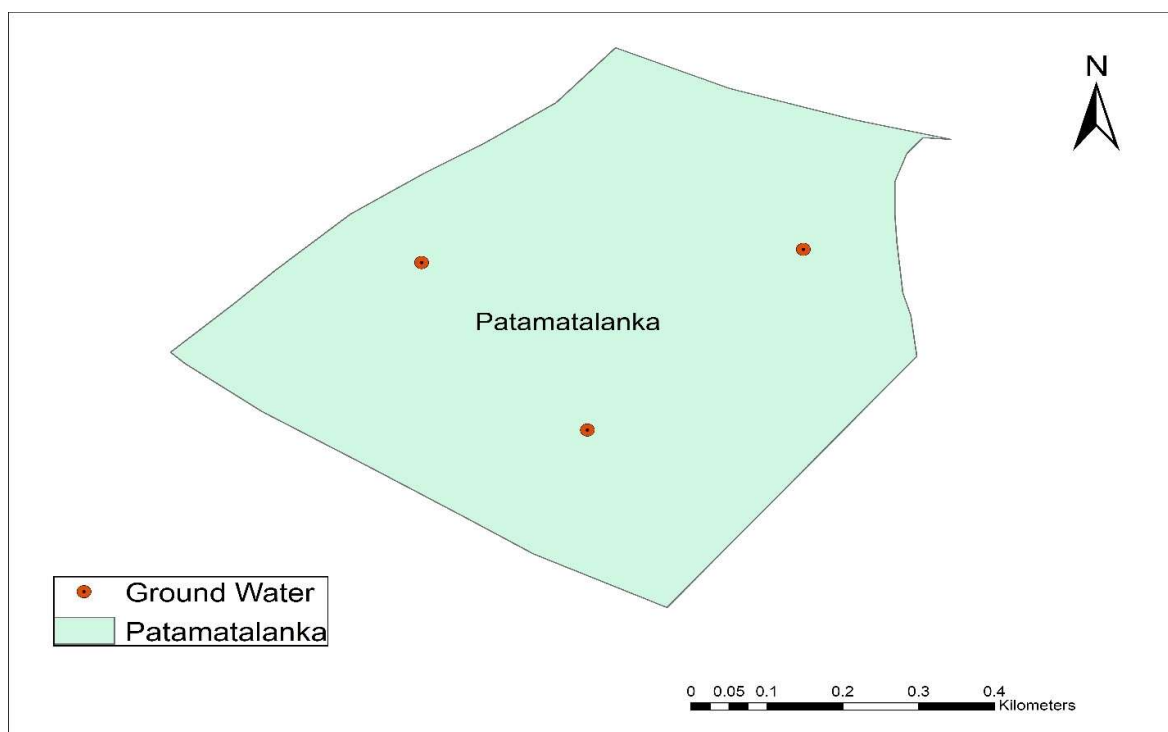

**Figure 4.10** Patamatalanka

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7.1	7	7.5	7.2
<b>TURBIDITY</b>	NTU	1.2	1.1	1.1	1.1
<b>TS</b>	mg/L	931	954	1011	965
<b>TSS</b>	mg/L	6	20	20	15.3
<b>TDS</b>	mg/L	925	934	991	959
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	501	511	586	532
<b>CONDUCTIVITY</b>	µmhos/cm	1423	1437	1525	1475.38
<b>CHLORIDES</b>	mg/L	171	189	245	201.41
<b>TOTAL HARDNESS</b>	mg/L	581	595	637	604
<b>PERMANENT HARDNESS</b>	mg/L	222	249	328	266
<b>TEMPORARY HARDNESS</b>	mg/L	359	346	309	338
<b>Ca</b>	mg/L	80.4	84.4	113.6	92.8
<b>Mg</b>	mg/L	82.86	87.72	100.60	60.39
<b>SO<sub>4</sub></b>	mg/L	40	44	48	44

**Table 4.12** Test Results of Patamatalanka



#### 4.8.11 Location 11: Governorpet


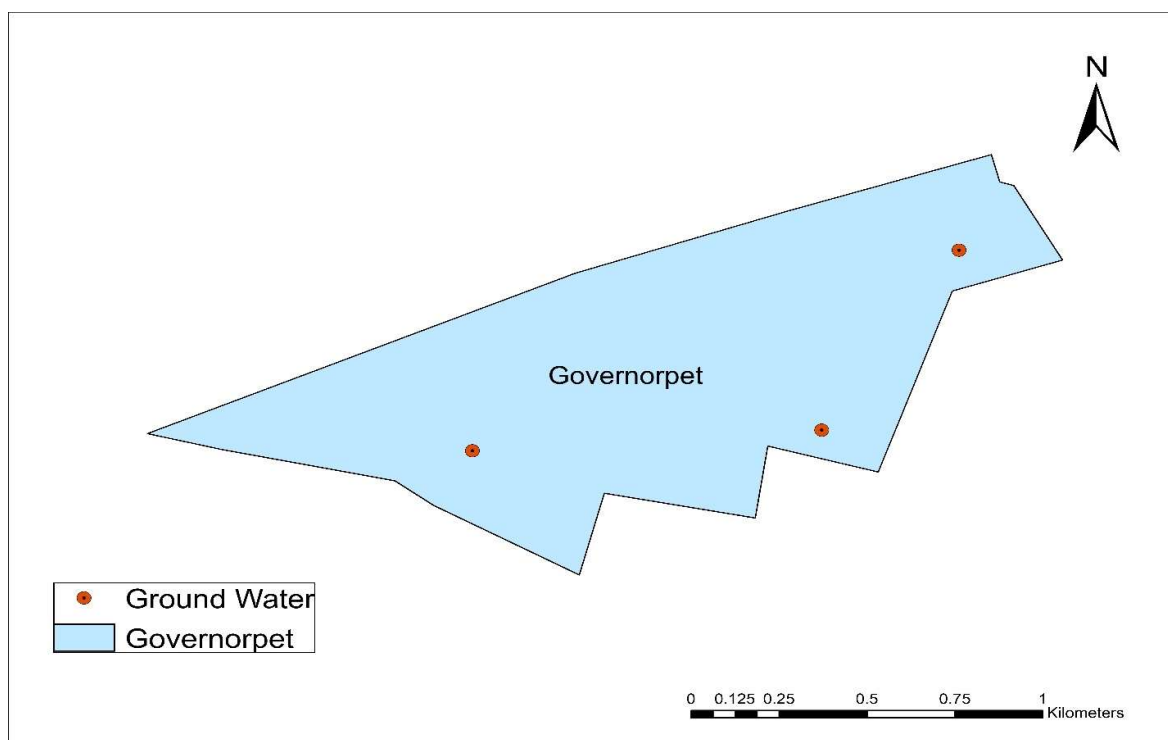


Figure 4.11 Governorpet

TEST	UNITS	S1	S2	S3	Average
pH	-	7	7.35	7.7	7.35
TURBIDITY	NTU	1.2	1.1	1.1	1.1
TS	mg/L	832	856	881	856
TSS	mg/L	15	21	16	13
TDS	mg/L	817	835	865	843
ALKALINITY	mg/L CaCO <sub>3</sub>	475	504	533	504
CONDUCTIVITY	μmhos/cm	1257	1285	1331	1296.92
CHLORIDES	mg/L	120	150	180	150.35
TOTAL HARDNESS	mg/L	472	500	528	501
PERMANENT HARDNESS	mg/L	101	138	175	138
TEMPORARY HARDNESS	mg/L	371	362	353	362
Ca	mg/L	85.2	99.2	114	99.2
Mg	mg/L	53.94	61.23	69.01	61.23
SO <sub>4</sub>	mg/L	22	26	30	26

Table 4.13 Test Results of Governorpet

#### 4.8.12 Location 12: Enikepadu

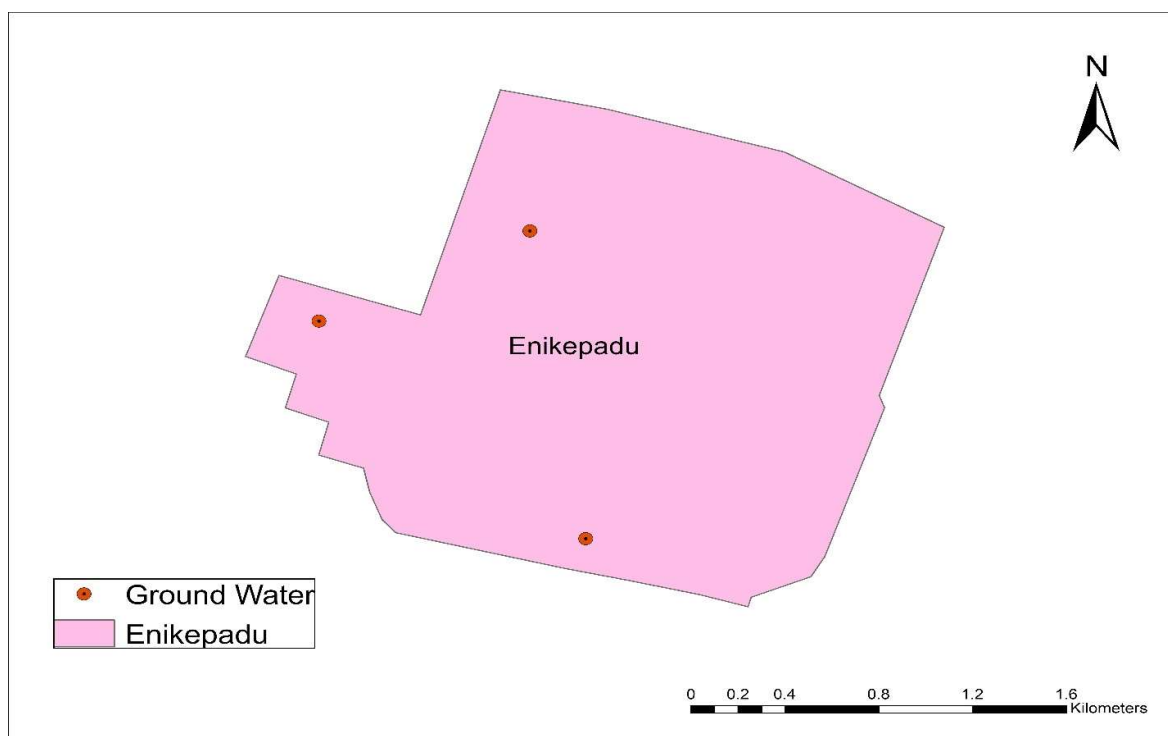

**Figure 4.12** Enikepadu

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7	7.5	8.5	7.67
<b>TURBIDITY</b>	NTU	1.1	1.2	1.2	1.2
<b>TS</b>	mg/L	951	976	1048	991
<b>TSS</b>	mg/L	10	17	20	7
<b>TDS</b>	mg/L	941	959	1028	984
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	321	341	396	352
<b>CONDUCTIVITY</b>	µmhos/cm	1448	1475	1582	1513.85
<b>CHLORIDES</b>	mg/L	549	565	620	578.35
<b>TOTAL HARDNESS</b>	mg/L	535	561	621	572
<b>PERMANENT HARDNESS</b>	mg/L	154	172	258	194
<b>TEMPORARY HARDNESS</b>	mg/L	381	389	363	378
<b>Ca</b>	mg/L	72.4	80.4	103.2	85.2
<b>Mg</b>	mg/L	78.03	82.62	101.57	87.23
<b>SO<sub>4</sub></b>	mg/L	20	24	28	24

**Table 4.14** Test Results of Enikepadu

#### 4.8.13 Location 13: Kanuru

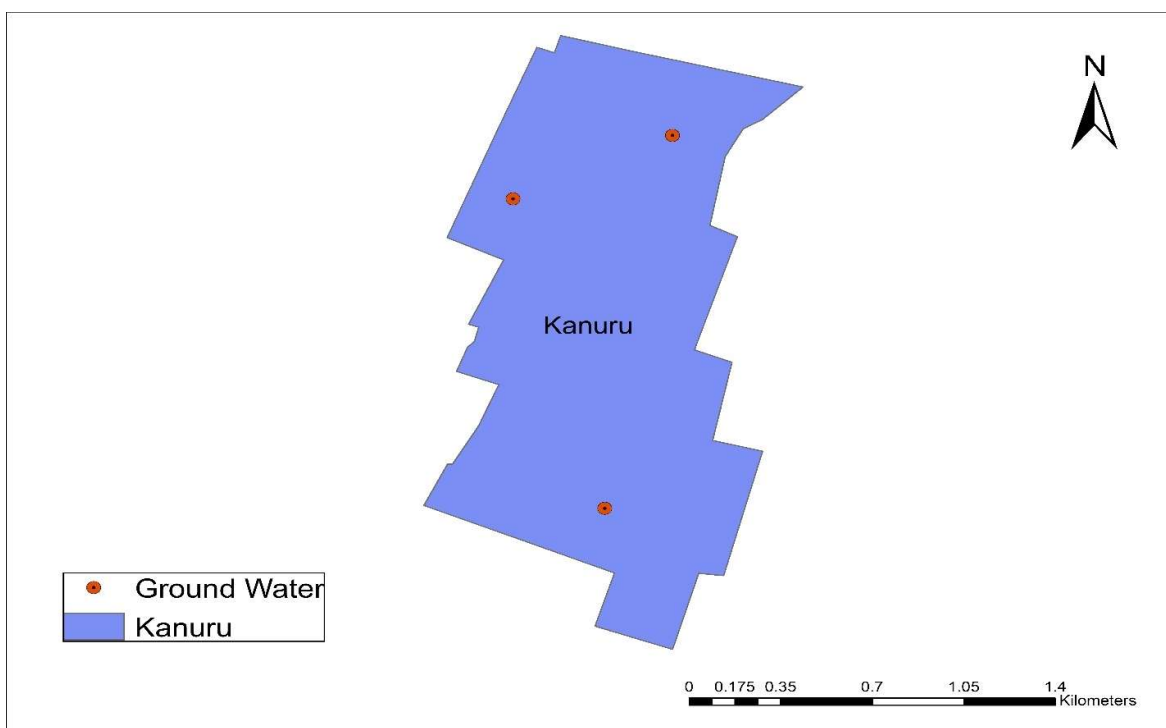


Figure 4.13 Machavaram

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	6.5	7	8.3	7.25
<b>TURBIDITY</b>	NTU	1.1	1.1	1.1	1.1
<b>TS</b>	mg/L	741	761	848	783
<b>TSS</b>	mg/L	13	16	21	14
<b>TDS</b>	mg/L	728	745	827	769
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	402	412	531	448
<b>CONDUCTIVITY</b>	μmhos/cm	1120	1146	1272	1183.08
<b>CHLORIDES</b>	mg/L	111	121	201	144.67
<b>TOTAL HARDNESS</b>	mg/L	335	362	467	388
<b>PERMANENT HARDNESS</b>	mg/L	146	165	231	180
<b>TEMPORARY HARDNESS</b>	mg/L	189	197	236	208
<b>Ca</b>	mg/L	80.4	85.2	113.2	92.8
<b>Mg</b>	mg/L	28.18	31.59	54.43	37.908
<b>SO<sub>4</sub></b>	mg/L	44	48	52	48

Table 4.15 Test Results of Gunadala

#### 4.8.14 Location 14: Ramavarappadu


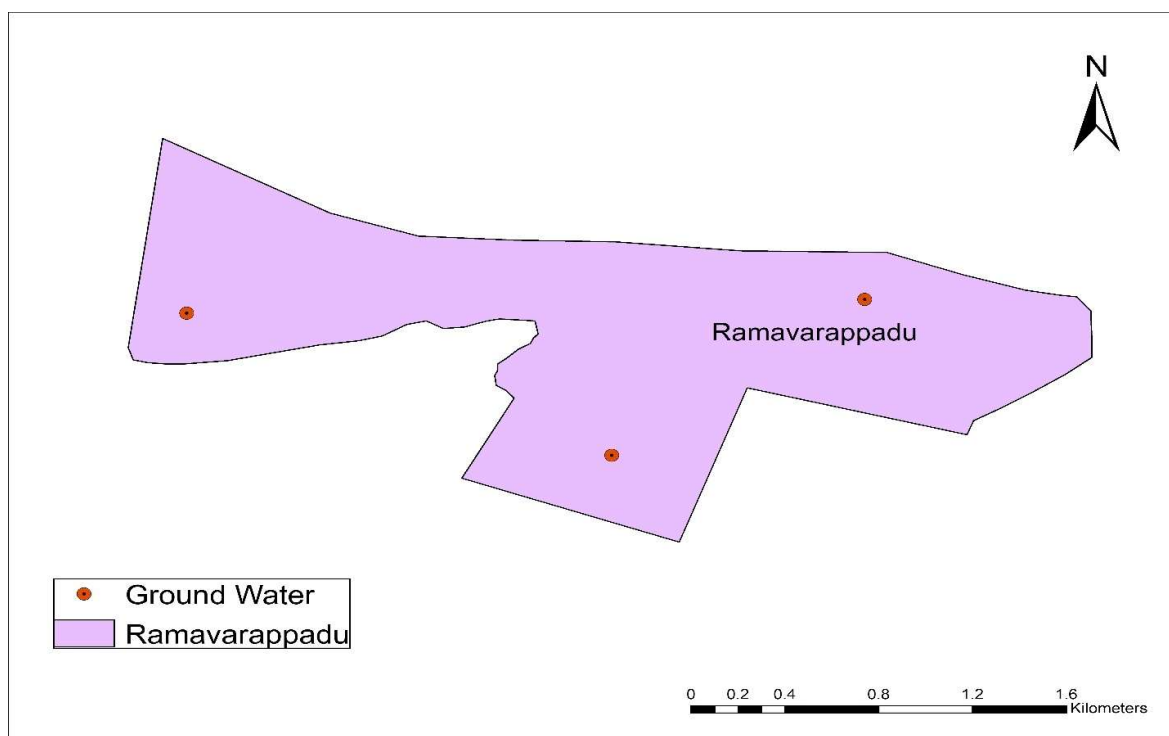


Figure 4.14 Machavaram

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7.5	7.75	8	7.75
<b>TURBIDITY</b>	NTU	1.1	1.2	1.2	1.2
<b>TS</b>	mg/L	620	659	698	659
<b>TSS</b>	mg/L	13	18	16	6
<b>TDS</b>	mg/L	607	641	682	653
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	325	352	380	352
<b>CONDUCTIVITY</b>	µmhos/cm	934	986	1049	1004.62
<b>CHLORIDES</b>	mg/L	91	144	198	144.67
<b>TOTAL HARDNESS</b>	mg/L	301	332	363	332
<b>PERMANENT HARDNESS</b>	mg/L	102	154	206	154
<b>TEMPORARY HARDNESS</b>	mg/L	199	178	157	178
<b>Ca</b>	mg/L	52	72	92	72
<b>Mg</b>	mg/L	24.3	36.93	49.81	36.93
<b>SO4</b>	mg/L	60	64	68	64

Table 4.16 Test Results of Gunadala

#### 4.8.15 Location 15: Gollapudi

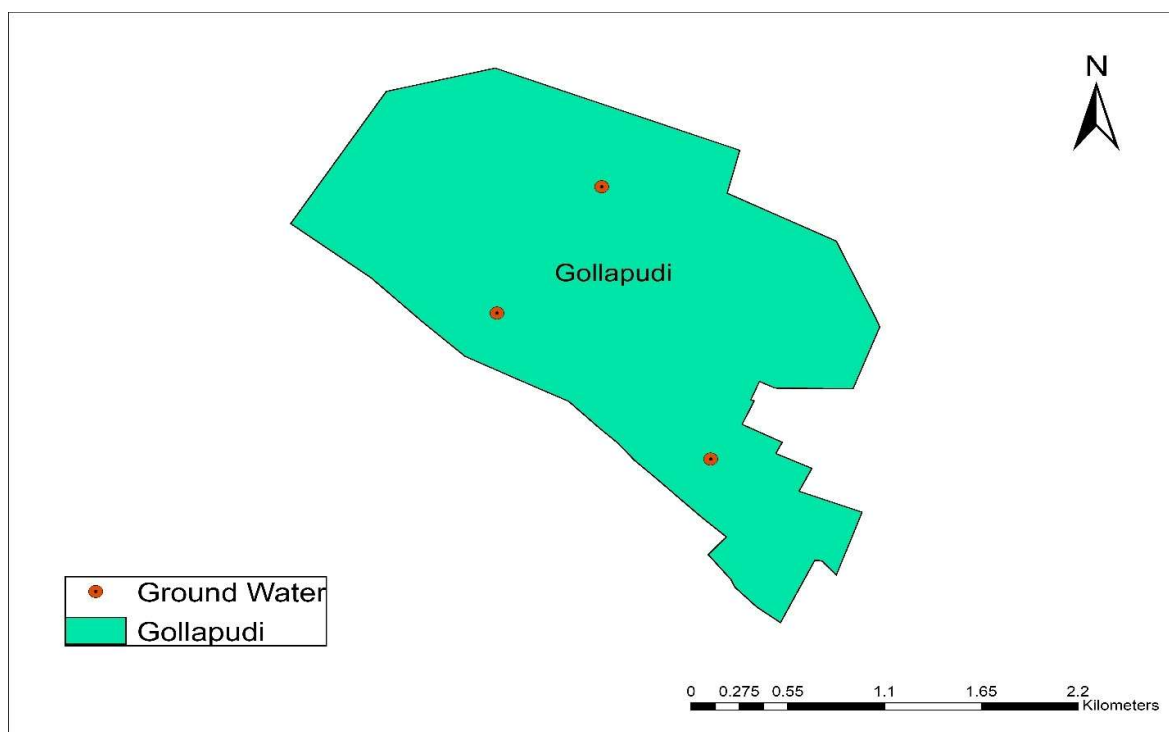


**Figure 4.15** Gollapudi

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7	7.5	7.75	7.45
<b>TURBIDITY</b>	NTU	1.2	1.3	1.4	1.4
<b>TS</b>	mg/L	1203	1313	1369	1295
<b>TSS</b>	mg/L	8	14	15	16
<b>TDS</b>	mg/L	1195	1299	1354	1279
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	529	596	616	580
<b>CONDUCTIVITY</b>	µmhos/cm	1838	1998	2083	1967.69
<b>CHLORIDES</b>	mg/L	312	381	371	354.6
<b>TOTAL HARDNESS</b>	mg/L	632	712	734	692
<b>PERMANENT HARDNESS</b>	mg/L	201	271	302	258
<b>TEMPORARY HARDNESS</b>	mg/L	431	441	432	434
<b>Ca</b>	mg/L	90.4	120.4	135.6	115.2
<b>Mg</b>	mg/L	91.36	104.73	98.65	98.17
<b>SO4</b>	mg/L	68	72	76	72

**Table 4.17** Test Results of Gollapudi

#### 4.8.16 Location 16: Ayodhya Nagar

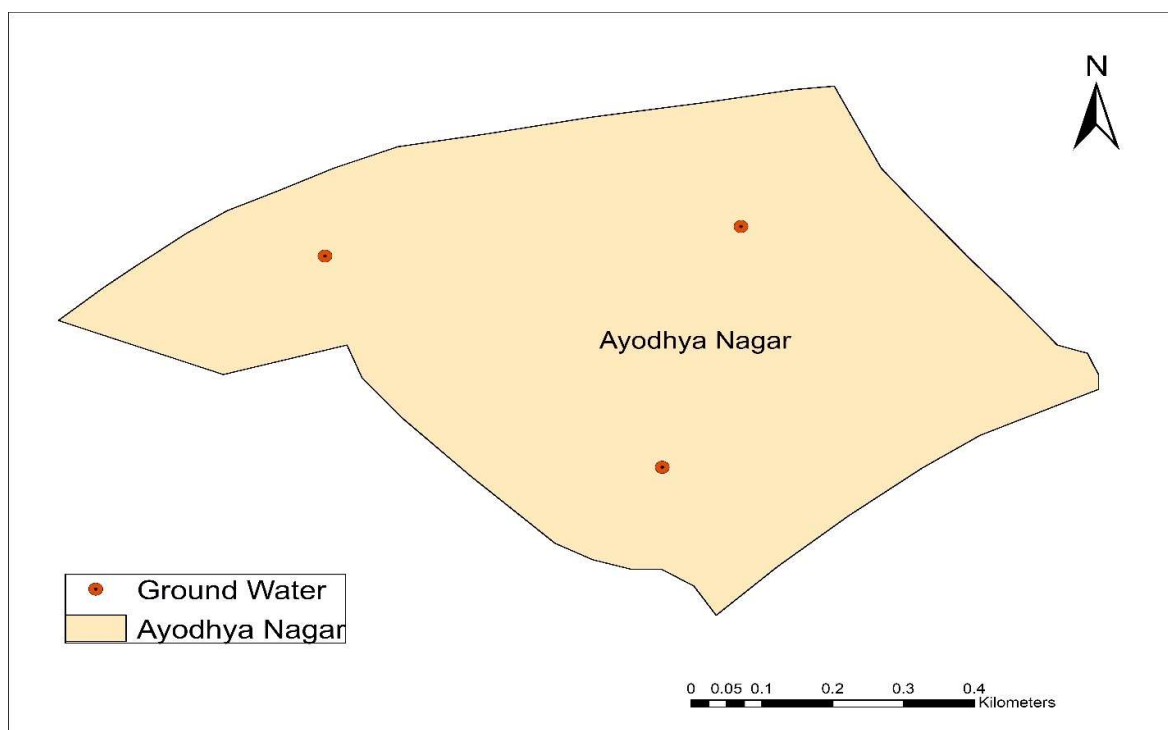

**Figure 4.16** Ayodhya Nagar

TEST	UNITS	S1	S2	S3	Average
<b>pH</b>	-	7	7.4	7.75	7.37
<b>TURBIDITY</b>	NTU	1.8	1.9	1.9	1.9
<b>TS</b>	mg/L	1301	1401	1466	1389
<b>TSS</b>	mg/L	10	12	17	13
<b>TDS</b>	mg/L	1291	1389	1449	367
<b>ALKALINITY</b>	mg/L CaCO <sub>3</sub>	625	665	668	652
<b>CONDUCTIVITY</b>	µmhos/cm	1986	2137	2229	2124.54
<b>CHLORIDES</b>	mg/L	391	420	431	414.17
<b>TOTAL HARDNESS</b>	mg/L	191	225	232	216
<b>PERMANENT HARDNESS</b>	mg/L	67	126	137	110
<b>TEMPORARY HARDNESS</b>	mg/L	124	99	95	106
<b>Ca</b>	mg/L	35.6	52.4	31.6	49.6
<b>Mg</b>	mg/L	10.93	27.21	29.16	22.35
<b>SO4</b>	mg/L	102	106	110	106

**Table 4.18** Test Results of Ayodhya Nagar

## 4.9 Thematic Maps showing Spatial Distribution of Sample Analysis:

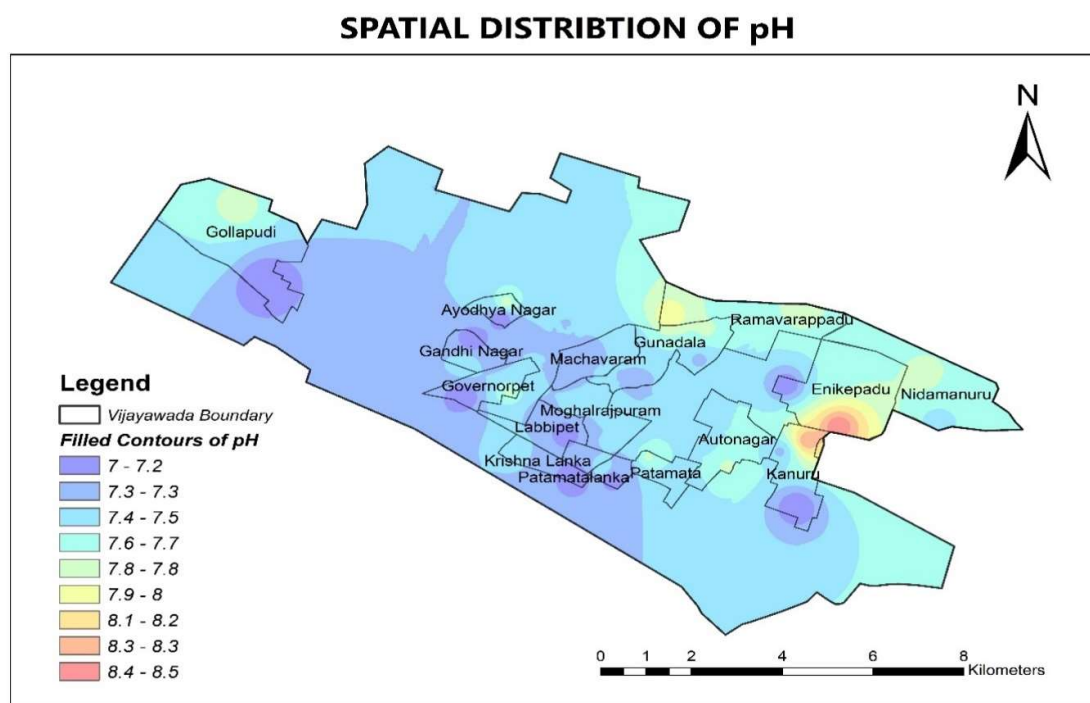


Figure 4.17 Spatial Distribution of pH

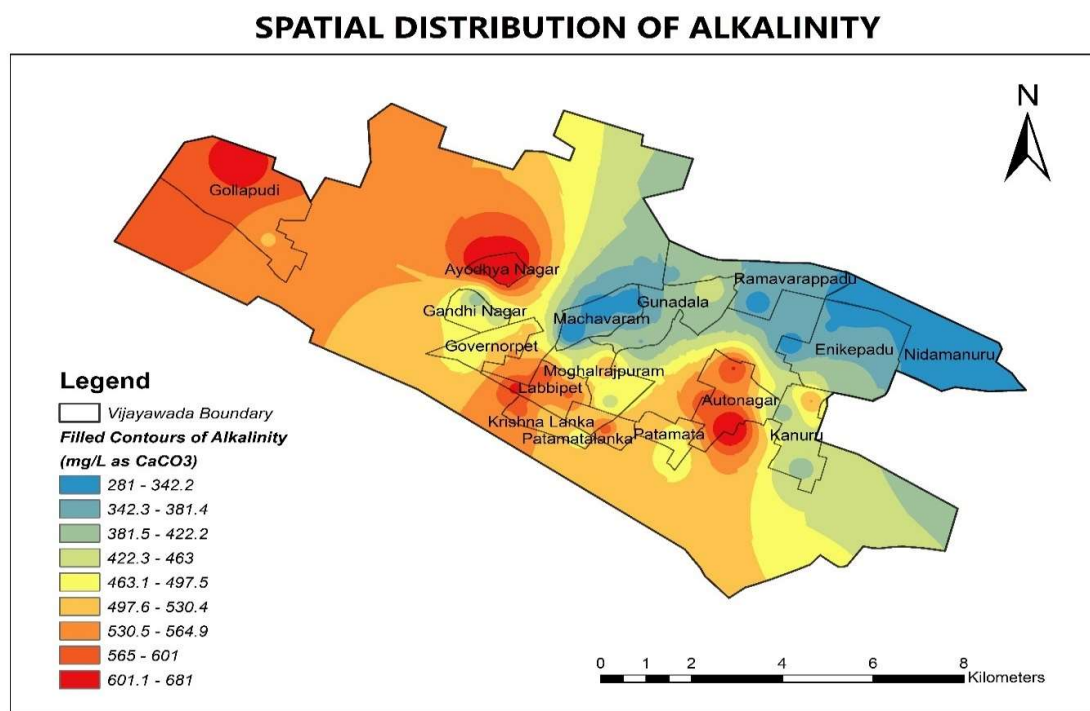


Figure 4.18 Spatial Distribution of Alkalinity

## SPATIAL DISTRIBUTION OF TURBIDITY

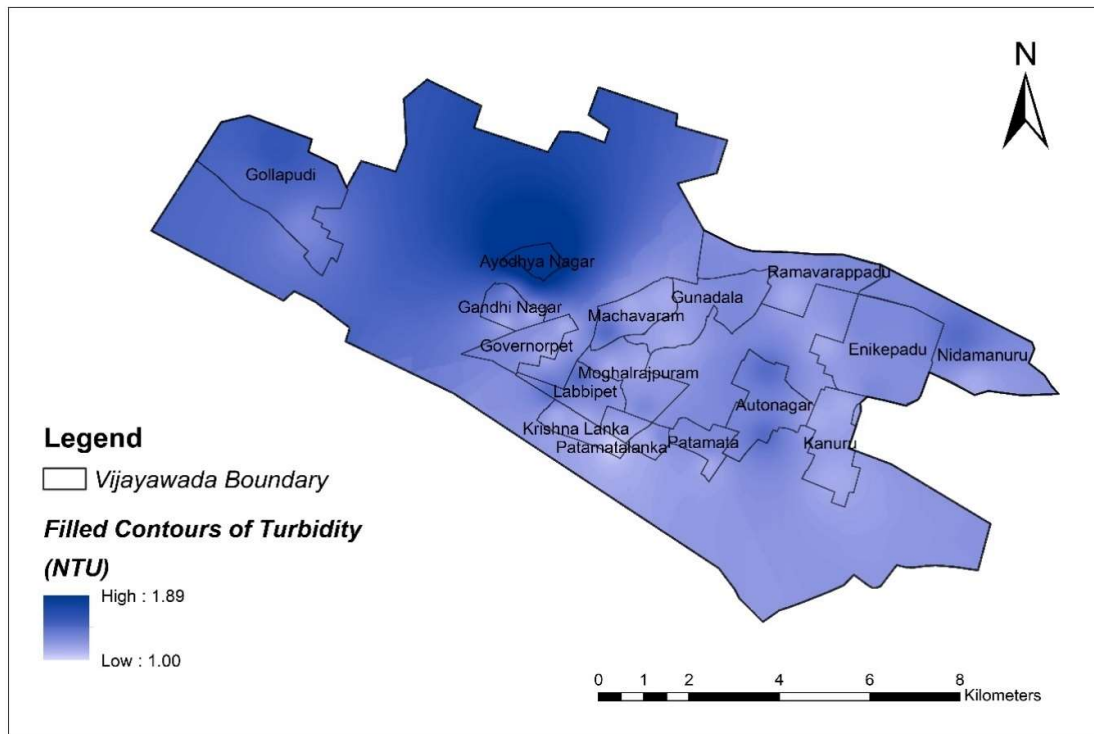


Figure 4.19 Spatial Distribution of Turbidity

## SPATIAL DISTRIBUTION OF CONDUCTIVITY

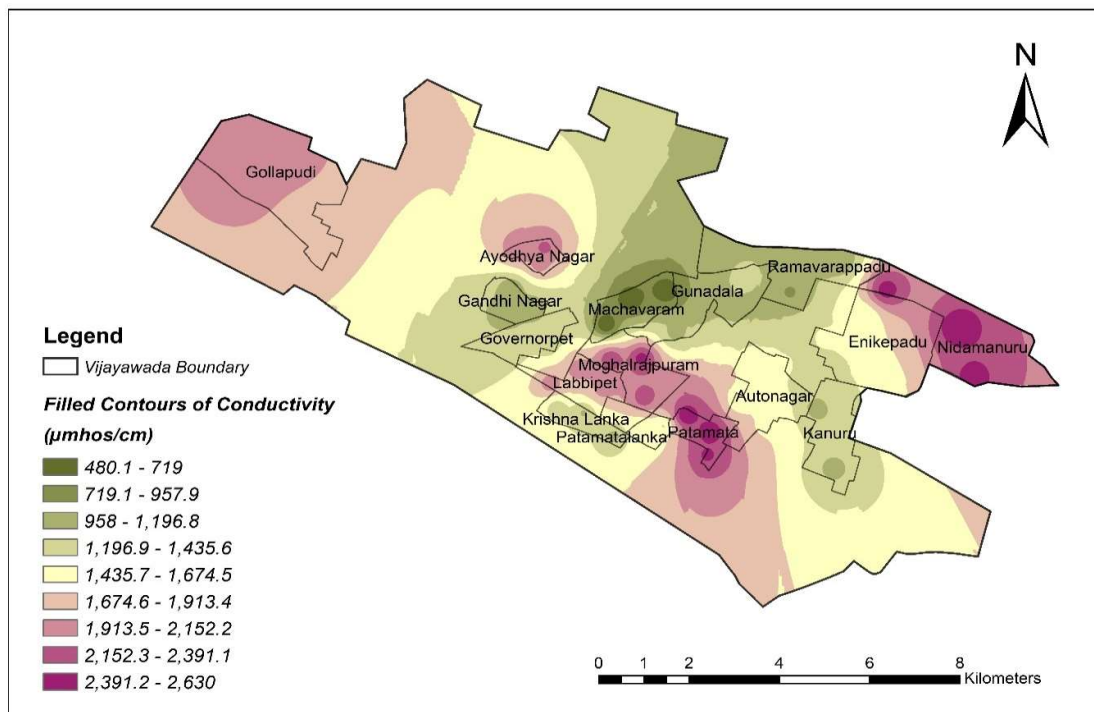


Figure 4.20 Spatial Distribution of Conductivity



## SPATIAL DISTRIBUTION OF TDS

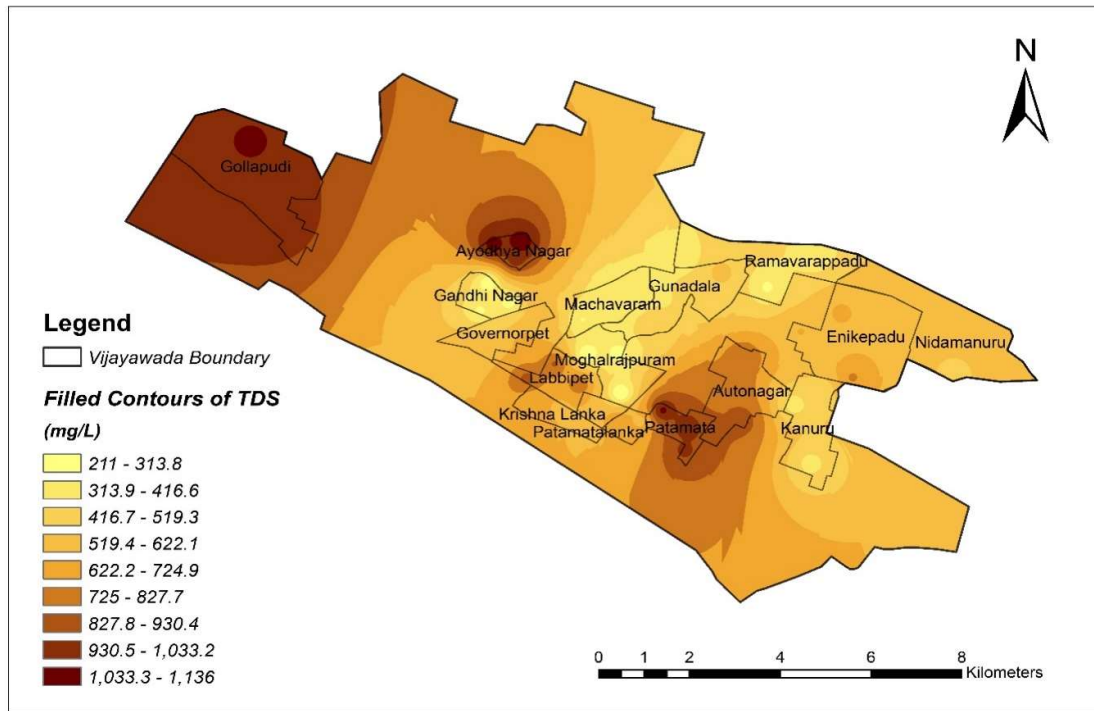


Figure 4.21 Spatial Distribution of TDS

## SPATIAL DISTRIBUTION OF CHLORIDE

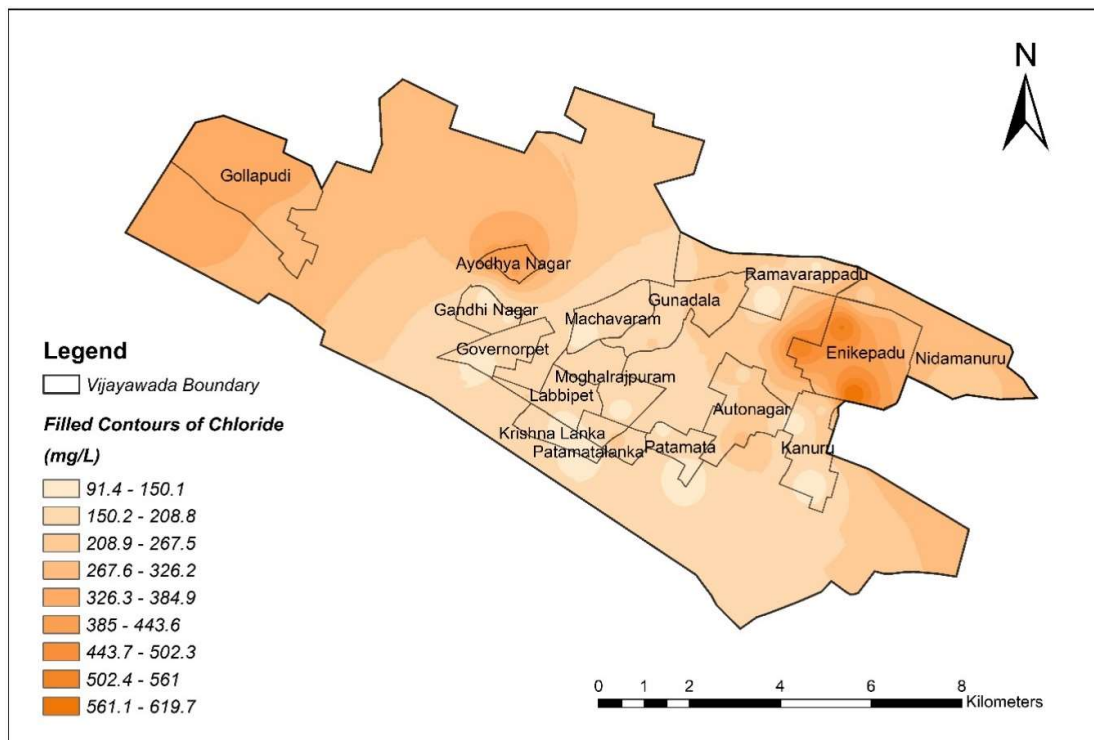


Figure 4.22 Spatial Distribution of Chloride

## SPATIAL DISTRIBUTION OF TOTAL HARDNESS

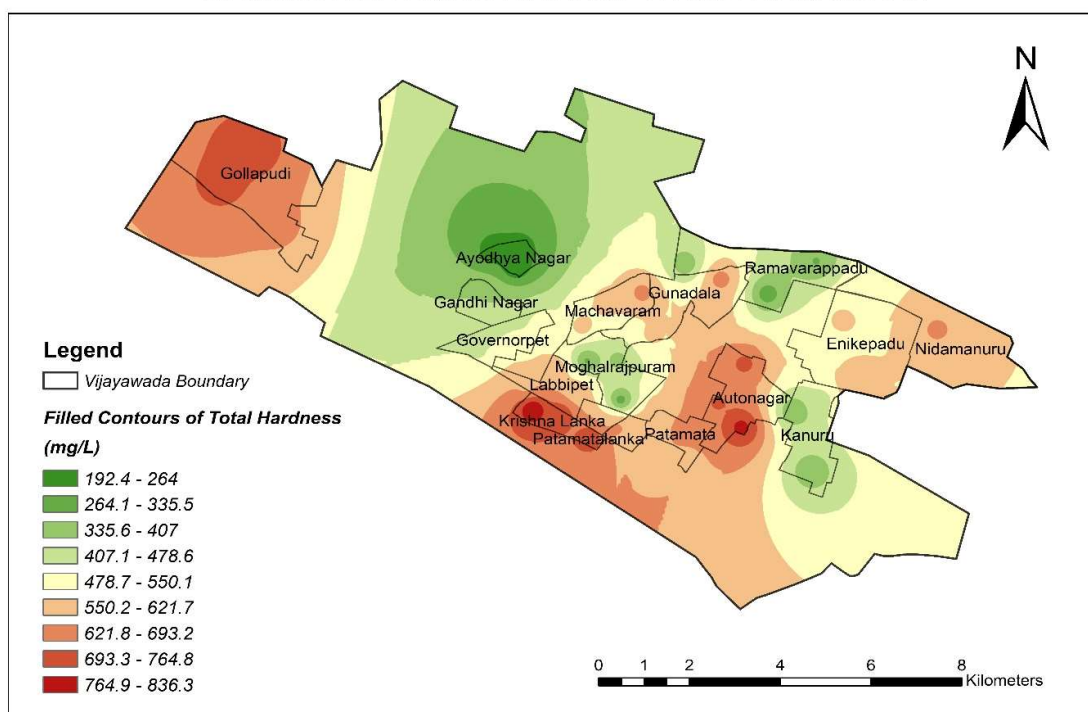


Figure 4.23 Spatial Distribution of Total Hardness

## SPATIAL DISTRIBUTION OF CALCIUM

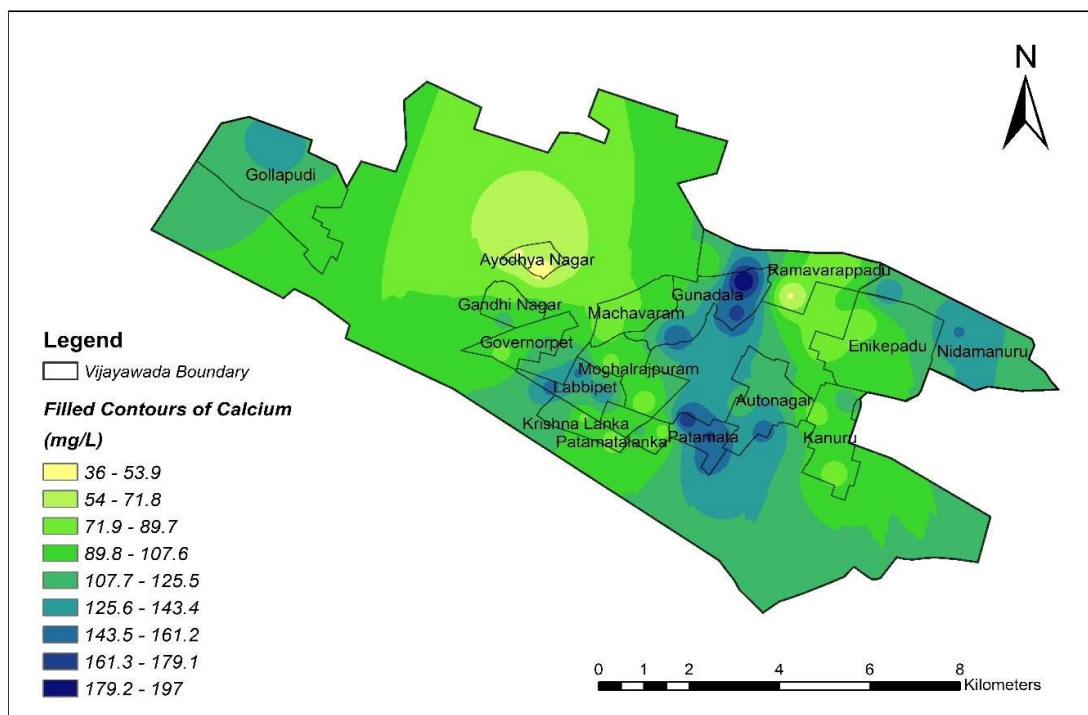


Figure 4.24 Spatial Distribution of Calcium

## SPATIAL DISTRIBUTION OF MAGNESIUM

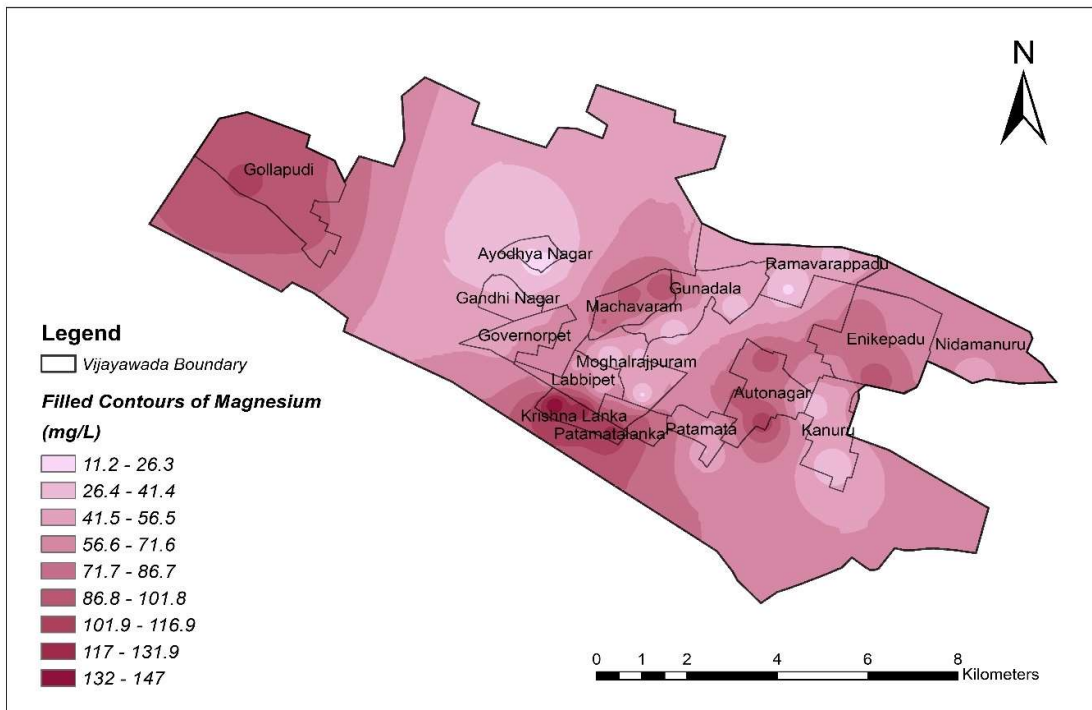


Figure 4.25 Spatial Distribution of Magnesium

## SPATIAL DISTRIBUTION OF SULPHATE

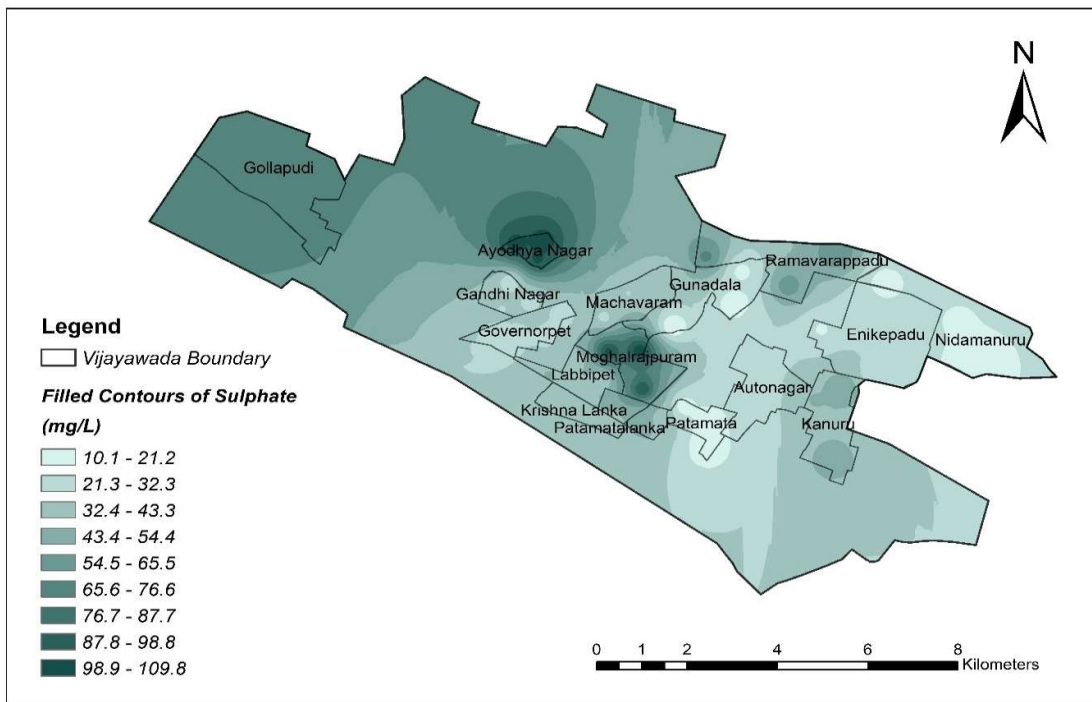


Figure 4.26 Spatial Distribution of Sulphate

**CHAPTER 5**  
**RESULT AND DISCUSSION**

## CHAPTER 5

### RESULT AND DISCUSSION

#### WATER QUALITY PARAMETERS AND STANDARDS FOR VARIOUS PHYSICAL AND CHEMICAL CONSTITUENTS:

S.No.	Parameters	IS 10500: 2012, IS 3025(Part 40), WHO	
		Permissible Limit	Maximum Limit
1	Colour	Agreeable	Agreeable
2	Odour	Agreeable	Agreeable
3	Taste	Agreeable	Agreeable
4	pH	6.5 to 8.5	No relaxation
5	Turbidity (NTU)	1	5
6	Alkalinity (as CaCO <sub>3</sub> ) (mg/L)	200	600
7	Electrical Conductivity (μmhos/cm)	500	1500
8	TDS (mg/L)	500	2000
9	Chloride (mg/L)	250	1000
10	Hardness (as CaCO <sub>3</sub> ) (mg/L)	200	600
11	Calcium (as Ca) mg/L	250	1000
12	Magnesium (as Mg) mg/L	30	100
13	Sulphate (mg/L)	200	400

**Table 5.1** Water Quality Standards

## EVALUATION OF WATER QUALITY PARAMETERS WITH PERMISSIBLE LIMITS:

✓	:	Within the permissible limits.
✗	:	Outside the permissible limits.

S.No.	Locations	Physico - Chemical Parameters									
		pH	Turbidity	Alkalinity	EC	TDS	Cl	Hardness	Ca	Mg	SO4
1	Patamata	✓	✗	✗	✗	✗	✓	✗	✓	✗	✓
2	Gandhi Nagar	✓	✗	✗	✗	✗	✓	✗	✓	✗	✓
3	Machavaram	✓	✗	✗	✗	✓	✓	✗	✓	✗	✓
4	Nidamanuru	✓	✗	✗	✗	✗	✓	✗	✓	✗	✓
5	Labbipet	✓	✗	✗	✗	✗	✓	✗	✓	✗	✓
6	Moghalraipuram	✓	✗	✗	✗	✓	✓	✗	✓	✓	✓
7	Gundala	✓	✗	✗	✗	✗	✓	✗	✓	✗	✓
8	Krishna Lanka	✓	✗	✗	✗	✗	✓	✗	✓	✗	✓
9	Auto Nagar	✓	✗	✗	✗	✗	✓	✗	✓	✗	✓
10	Patamatalanka	✓	✗	✗	✗	✗	✓	✗	✓	✗	✓
11	Governorpet	✓	✗	✗	✗	✗	✓	✗	✓	✗	✓
12	Enikepadu	✓	✗	✗	✗	✗	✗	✗	✓	✗	✓
13	Kanuru	✓	✗	✗	✗	✗	✓	✗	✓	✗	✓
14	Ramavarappadu	✓	✗	✗	✗	✗	✓	✗	✓	✗	✓
15	Gollapudi	✓	✗	✗	✗	✗	✗	✗	✓	✓	✓
16	Ayodhya Nagar	✓	✗	✗	✗	✗	✗	✗	✓	✗	✓

**Table 5.2** Evaluated Water Quality Parameters at different locations

## **5.1 INSIGHT:**

### **5.1.1 PH**

Measurement of PH Value In the study area of 16 water locations, Ph value is in the limits. All the measured pH values are given in the Tables of each location and the spatial distribution map is shown in the Figures which indicates that the eastern and western portions of the basin is more alkaline compared to central portion of the basin.

### **5.1.2 Turbidity**

Measurement of Turbidity Value In the study area of 16 water locations, Turbidity value is not in the limits. All the measured Turbidity values are given in the Tables of each location and the spatial distribution map is shown in the Figures which indicates that the northern portions of the basin is more Turbidity compared to southern portion of the basin.

### **5.1.3 Alkalinity**

Measurement of Alkalinity Value In the study area of 16 water locations, Alkalinity value is not in the limits. All the measured Alkalinity values are given in the Tables of each location and the spatial distribution map is shown in the Figures which indicates that the eastern portions of the basin is more Alkalinity compared to western portions of the basin.

### **5.1.4 Conductivity**

More or less following the TDS way i.e., the eastern and western portions of the basins is having higher conductivity as it is having more dissolved salts compared to the northern portion of the basin. According to the map (Fig.12) the central portion of the basin is having high values of EC, whereas the North part of the basin are showing low EC values.

### **5.1.5 TDS**

Maximum TDS concentration of 500 mg/l is allowed for drinking water, in all locations the TDS is not in the limits except in the sample no 3 and 6 in which it is in the limits. The highest value is 1555. In the study area the TDS value of the drinking water locations 3 and 6 is within the desirable limits. All the values of the TDS are tabulated in the Table and the spatial distribution map of the TDS indicates the same trend as the EC map.

### **5.1.6 Chloride**

In the entire water locations, the Chloride concentration is within the desirable limits, and it ranges from 90 – 200 mg/l with an average value 144.67 mg/l and the values are tabulated in the Table the spatial distribution map is shown in Fig and it indicates that the western portion of the basin is having somewhat higher values of Chloride, but within the desirable limits only. In the drinking water locations (12, 15, 16) the Chloride concentrations are 578.35 mg/l and 354.56 mg/l and 414.17 mg/l respectively.

### **5.1.7 Calcium**

In the study area all sample contains the calcium with in the desirable drinking water standards.

### **5.1.8 Magnesium**

The magnesium concentration ranges from 30.132 – 98.17 mg/l, in drinking water locations (6, 15). It is within the desirable limits. The concentrations of  $\text{Ca}^{+2}$ , are given in the Table and the spatial maps are shown in Fig.

### **5.10 Sulphate**

In all the water locations the Sulphate concentration is within the desirable limits, and it ranges from 98 – 102 mg/l and the values are tabulated in the Table, the spatial distribution map is also shown in Fig. which indicates that South – East and North – East corners of the basin are having somewhat higher values but all the values are within the desirable limit.

## **5.2 EFFECTS AND REMEDIES OF UNSAFE PARAMETERS:**

### **pH**

#### **EFFECTS of pH:**

- Drinking water with an elevated pH above 11 can cause skin, eye and mucous membrane irritation.
- On the opposite end of the scale, pH values below 4 also cause irritation due to the corrosive effects of low pH levels.
- At low pH values generally have few negative health effects. Acidic drinking water can cause serious problems, through the leaching of heavy metals from plumbing systems.
- Aquatic wildlife also suffers from the effects of pH extremes. Fish die-off occurs when pH levels dip below 4.5 or rise above 10.

#### **TREATMENT FOR pH IN DRINKING WATER:**

- Two home treatment methods to adjust pH are acid neutralizing filters and chemical feed pump systems injecting a neutralizing solution. An acid neutralizing filter uses a calcite or ground limestone (calcium carbonate) for normal pH correction, but could also include a blend of magnesium oxide and calcite, if the pH is very low.

### **ALKALINITY**

#### **EFFECTS OF ALKALINITY IN WATER:**

- Effect on pH Levels. Alkaline water has no effect upon the pH levels of the physical body; After ingestion, alkaline...



- Cardiovascular Disease. Drinking alkaline water causes chemical changes within the body that affect the health and...
- Digestion. Proper digestion relies on the presence of hydrochloric acid in the stomach to chemically break down food and...

#### TREATMENT OF ALKALINITY:

- Reverse Osmosis – Membrane filtration has become the popular option for boiler water treatment. With appropriate...
- Chloride Anion Dealkalizers – Chloride anion dealkalizers operate similar to ion exchange water softeners, except the...
- Weak Acid Dealkalization – When the ratio of water hardness to alkalinity is 1 or greater, a weak acid cation (WAC)...

### **TURBIDITY**

#### EFFECTS OF TURBIDITY IN WATER:

- Turbidity affects the growth rate of algae (micro-aquatic plants) and other aquatic plants in streams and lakes because increased turbidity causes a decrease in the amount of light for photosynthesis.
- Turbidity can also increase water temperature because suspended particles absorb more heat. These factors lead to a decrease in dissolved oxygen.

#### TREATMENT OF TURBIDITY:

- Cloth Filtration. A simple option to pre-treat turbid water is to filter through a locally available cloth
- Sand Filtration. Filtration through clean sand is a fast and simple pre-treatment option.

### **TOTAL SOLIDS**

#### EFFECTS:

- High concentrations of solids can cause many problems for stream health and aquatic life.
- High TS can block light from reaching submerged vegetation and as a result photosynthesis slows down.
- High TS can also cause an increase in surface water temperature, because the suspended particles absorb heat from sunlight. This can cause dissolved oxygen levels to fall even further and can harm aquatic life.

## TREATMENT FOR TS

- Gravity settling

Solid particles, because of their heavier density (compared to water) and net negative buoyant force, will settle to the bottom with a terminal velocity. After settle solids water is removed.

- Filtration

Small-diameter suspended particles by filtration process.

## TOTAL DISSOLVED SOLIDS

### EFFECTS OF TDS:

- At higher levels, excessive hardness, unpalatability, mineral deposition and corrosion may occur.
- At low levels, however, TDS contributes to the palatability of water.
- High TDS levels (>500 mg/litre) result in excessive scaling in water pipes, water heaters, boilers, and household appliances such as kettles and steam irons.
- High concentrations of TDS may also reduce water clarity, contribute to a decrease in photosynthesis, combine with toxic compounds and heavy metals, and lead to an increase in water temperature.

### TREATMENT FOR TDS:

- Treatment for TDS content depends upon which compounds make up the dissolved solids content of an individual's water supply.
- Excess calcium and magnesium as well as small amounts of iron can usually be removed through traditional salt-based softeners. While the overall TDS content will not be reduced, by replacing these minerals with sodium, impact of hard water will be mitigated.
- For other compounds like sulphates nitrates and sodium, a reverse osmosis or distillation system is usually needed.
- If there is high TDS content, the water treatment system is used.

## CHLORIDES

### EFFECTS OF CHLORIDES IN WATER:

- Although chlorides are harmless at low levels, well water high in sodium chloride can damage plants if used for gardening or irrigation, and give drinking water an unpleasant taste.
- Over time, sodium chloride's high corrosivity will also damage plumbing,

appliances, and water heaters, causing toxic metals to leach into your water.

- At levels greater than this, sodium chloride can complicate existing heart problems and contribute to high blood pressure when ingested in excess.

#### TREATMENT OF CHLORIDES:

- Reverse Osmosis will remove 90 - 95% of the chlorides because of its salt rejection capabilities.
- Electro dialysis and distillation are two more processes that can be used to reduce the chloride content of water.

### HARDNESS OF WATER


#### EFFECTS

- The health effects of hard water are mainly due to the effects of the salts dissolved in it, primarily calcium and magnesium. To a large extent, individuals are protected from excess intakes of calcium by a tightly regulated intestinal absorption mechanism through the action of 1, 25- dihydroxy-vitamin D, the hormonally active form of vitamin D.
- Increased soap usage in hard water results in metal or soap salt residues on the skin or on clothes that are not easily rinsed off and that lead to contact irritation.

#### TREATMENT FOR HARDNESS

- Chemical Process of Boiling Hard Water

We can boil water to remove temporary hardness. Temporary hardness in water can be easily removed by boiling. On boiling, calcium/magnesium bicarbonate decomposes to give calcium/magnesium carbonate, which is insoluble in water. Therefore, it precipitates out.



- Ion Exchange Process (Permutit Process)

Permutit or zeolites are packed in a suitable container and a slow stream of hard water is passed through this material. As a result, calcium and magnesium ions present in hard water are exchanged with sodium ions in the Permutit ( $\text{Na}^+\text{Al-Silicate}$ ). The outgoing water contains sodium salts, which do not cause hardness.

## **CALCIUM**

### **EFFECTS OF CALCIUM IN WATER:**

- Calcium is largely responsible for water hardness, and may negatively influence toxicity of other compounds
- Elements such as copper, lead and zinc are much more toxic in soft water. In limed soils calcium may immobilize iron. This may cause iron shortages, even when plenty of iron is present in the soil.

### **TREATMENT OF CALCIUM:**

- Reverse Osmosis. You have probably heard about the Reverse Osmosis water purifying system.
- Boiling

## **MAGNESIUM:**

### **EFFECTS OF MAGNESIUM IN WATER:**

- Drinking-water in which both magnesium and sulphate are present in high concentrations (~250 mg/l each) can have a laxative effect.
- Laxative effects have also been associated with excess intake of magnesium taken in the form of supplements, but not with magnesium in the diet.

### **TREATMENT OF MAGNESIUM:**

- Reverse Osmosis. You have probably heard about the Reverse Osmosis water purifying system.
- Ion exchange Water Softener

## **SULPHATE**

### **EFFECTS OF SULPHATE IN WATER:**

- People who are not used to drinking water with high sulphate can get diarrhoea and dehydration from drinking the water.
- Infants are often more sensitive to sulphate than adults.

### **TREATMENT OF SULPHATE:**

- Adsorption: Adsorption is the process of capturing contaminants from a liquid stream by using molecular forces.  
Distillation: Distillation involves heating sulphate-saturated liquids to boiling, then cooling the resulting water.

## CONCLUSION

- ❖ The present study of ground water in Patamata, Gandhi Nagar, Machavaram, Nidamanuru, Labbipet, Moghalrajpuram, Gundala, KrishnaLanka, AutoNagar, Patamatalanka, Governorpet, Enikepadu, Kanuru, Ramavarappadu, Gollapudi, Ayodhya Nagar with a comprehensive of the parameters is studied.
- ❖ The spatial distribution maps of Turbidity, Alkalinity, TDS, Conductivity, Hardness, Magnesium shows that these parameters are not in the permissible limit in the study area.
- ❖ This study has shown that the use of GIS is very useful tool for the assessment of ground water quality.
- ❖ Finally, it is concluded by using GIS technology has great potential to revolutionize ground water monitoring and management in the future. Rapidly expanding GIS technology will play a central role in handling the voluminous spatio-temporal data and their effective interpretation, analysis and presentation, through GIS applications.
- ❖ It is recommended that groundwater should be treated prior to use as drinking water by using reverse osmosis for large scale and filters for small scale needs. Also ground water recharge with rainwater improves the quality of ground water by balancing various physiochemical properties.
- ❖ Effects and Remedies for various unsafe parameters have been identified.
- ❖ Web Sites:

[www.google.com](http://www.google.com)

[www.googleearth.com](http://www.googleearth.com)

[www.gisdevelopment.net](http://www.gisdevelopment.net)

[www.mapsofindia.com](http://www.mapsofindia.com)

<http://ga.water.usgs.gov>

## REFERENCES

1. Abbulu, Y., and G.V.R. Srinivasa Rao (2013), "A Study on Physico - Chemical Characteristics of Groundwater in the Industrial Zone of Visakhapatnam, Andhra Pradesh", American Journal of Engineering Research, Vol. 2, Issue-10, pp-112-116.
2. Akhilesh J., and D. Savita (2008), "Pre and Post - Monsoon Variation in Physico - Chemical Characteristics in Groundwater Quality of Bhopal "The City of Lakes" India", Asian J. Exp. Sci., Vol. 22, No. 3, pp: 311-316.
3. Asit K. B., and C. Surajit (2015), "Hydrogeochemistry and Water Quality Index in the assessment of Groundwater Quality for Drinking Uses", Water Environmental Research, Volume 87, Number 7.
4. IS 10500 (2012), "Drinking Water – Specification"
5. IS 3025 (1984), "Methods of Sampling and Test (Physical and Chemical) for Water and Waste Water".
6. "Guidelines for Drinking-water Quality" - Fourth Edition World Health Organization.
7. Leelavathi, Ch., Krishna Sainath, U., and A. K. Rabbani, (2016), "Physicochemical Characterization of ground water of Autonagar, Vijayawada, Krishna district", Int. Journal of Engineering Development and Research , Vol-4 (2), pp-1324-1328.
8. Sirajudeen, J., M. K. Mohidheen and, R. A. Vahith (2014) "Physico-chemical contamination of groundwater in and around Tirunelveli district, Tamil Nadu", Advances in Applied Science Research, 2014, 5(2),pp: 49-54.
9. Hanumantharao Chappidi, Mallela Koteswara Rao, Thathapudi Kalyan "Groundwater Quality Assessment for Drinking Purpose in Vijayawada Region, Andhra Pradesh, India"
10. B. Thanga Gurusamy "Spatial distribution analysis and mapping of ground water quality across Chennai".