


P.C.B LAYOUT(copper-sided view)

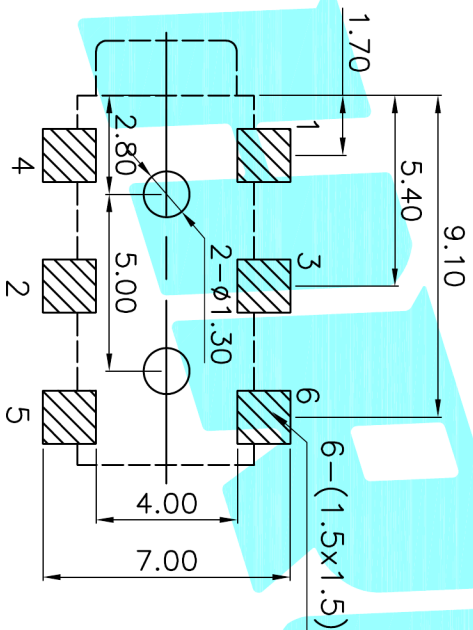

Rating:0.5A 30V DC  
Contact Resistance:100 mΩ Max.  
Operating temperature:-20℃~70℃  
Operating force:3-20N  
Operating Life:5,000cycles

Model No.	PJ-237-A	PJ-237-B
Schematic		
Model No.	PJ-237-C	PJ-237-D
Schematic		

② Terminal		6		Phosphor bronze		Au Plating			
① Housing		1		Nylon		Black			
ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK			
APPROVALS				DATE					
DRAWN		J.X.Zhang		2013/11/11		ELECTRONICS CO.,LTD			
CHECKED						TITLE: PHONE JACKS			
APPROVALS						PART NO. PJ-237			
TOLERANCES ARE		30~0.1 10~0.30 5~0.10		±0.30 ±0.20 ±0.15		ANGLE		UNIT: mm	
		~ 5		±0.10		±2'		SCALE: 1:1	
								DRAWING NO.	
								SHEET 1 of 1	

ECN NO.

REV.

DATE.

DESCRIPTION.

CHANGE.

CHECK.

APPRO.

NEW