


Cisco Router Initial configuration

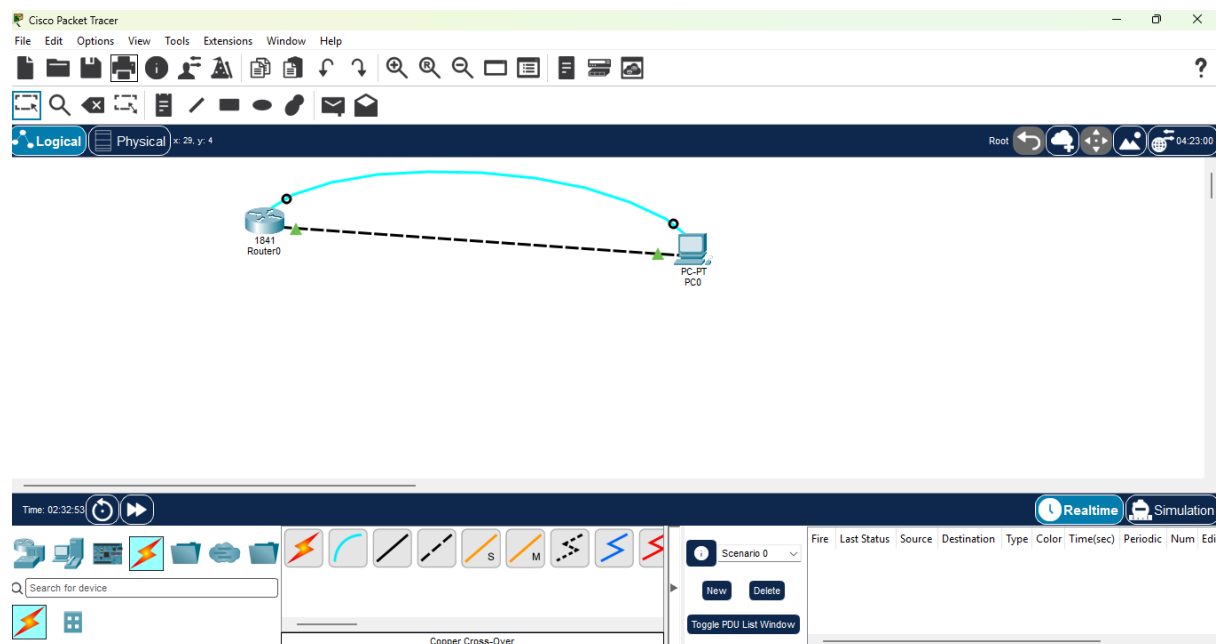

User Access Verification

Username: kannan
Password:

```
Router>show ip interface brief
Interface      IP-Address      OK? Method Status      Protocol
FastEthernet0/0 192.168.10.1    YES manual up          up
FastEthernet0/1 unassigned      YES unset  administratively down down
Vlan1          unassigned      YES unset  administratively down down
Router>
Router>
Router>
Router>
```

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>
C:\>
C:\>
C:\>ping 100.100.100.1 -t
Invalid Command.

C:\>ping 100.100.100.1

Pinging 100.100.100.1 with 32 bytes of data:

Reply from 100.100.100.1: bytes=32 time=1ms TTL=255
Reply from 100.100.100.1: bytes=32 time<1ms TTL=255
Reply from 100.100.100.1: bytes=32 time<1ms TTL=255
Reply from 100.100.100.1: bytes=32 time<1ms TTL=255

Ping statistics for 100.100.100.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>|
```

Press RETURN to get started!

User Access Verification

Username: kannan
Password:

Router>ping 100.100.100.11

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 100.100.100.11, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 0/0/0 ms

Router>ping 100.100.100.12

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 100.100.100.12, timeout is 2 seconds:
.....
Success rate is 0 percent (0/5)

Router>