


SYSTEM ROUTING TABLE

Router IP address assigned

[illegible]

Source IP assigned

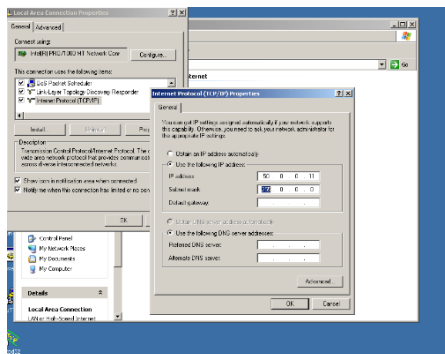

Router Ping from Pc1 to router

A screenshot of a Windows Command Prompt window titled "C:\WINDOWS\system32\cmd.exe". The prompt shows a series of eight successful ping commands to the IP address 50.0.0.1. Each line displays the response from the host, indicating 32 bytes of data, a time of 1ms, and a TTL of 255. The output is as follows:

```
C:\WINDOWS\system32\cmd.exe  
Pinging 50.0.0.1 with 32 bytes of data:  
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255  
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255  
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255  
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255  
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255  
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255  
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255  
Reply from 50.0.0.1: bytes=32 time=1ms TTL=255
```


The window has standard Windows XP-style title bar controls (minimize, maximize, close) in the top right corner.

Router Ping from Pc2 to router

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.
C:\Documents and Settings\user>ping 60.0.0.11
Pinging 60.0.0.11 with 32 bytes of data:
Reply from 60.0.0.11: bytes=32 time=1ms TTL=128
Reply from 60.0.0.11: bytes=32 time=1ms TTL=128
Reply from 60.0.0.11: bytes=32 time=1ms TTL=128
Reply from 60.0.0.11: bytes=32 time=1ms TTL=128
Ping statistics for 60.0.0.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milliseconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\Documents and Settings\user>ipconfig
Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 60.0.0.11
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 

C:\Documents and Settings\user>
```

Pc1 to pc2 ping test

```
C:\WINDOWS\system32\ping.exe
Pinging 50.0.0.11 with 32 bytes of data:
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
Destination host unreachable.
```

1. there is no route in system route table
2. so manually destination route to be added as below (60.0.0.0)

```
C:\WINDOWS\system32\cmd.exe
'route' is not recognized as an internal or external command,
operable program or batch file.

C:\Documents and Settings\user>route print
=====
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 fe 9c 09 4f 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet
Scheduler Miniport
=====
Active Routes:
Network Destination        Netmask          Gateway           Interface        Metric
-----
50.0.0.0                   255.0.0.0        50.0.0.11        50.0.0.11        10
50.0.0.11                  255.255.255.255  127.0.0.1        127.0.0.1        10
50.255.255.255             255.255.255.255  50.0.0.11        50.0.0.11        10
60.0.0.0                   255.0.0.0        50.0.0.11        50.0.0.11        1
127.0.0.0                  255.0.0.0        127.0.0.1        127.0.0.1        1
224.0.0.0                  240.0.0.0        50.0.0.11        50.0.0.11        10
255.255.255.255           255.255.255.255  50.0.0.11        50.0.0.11        1
=====
Persistent Routes:
None

C:\Documents and Settings\user>
```

1. after the manual D-IP

```
C:\Documents and Settings\user>ping 60.0.0.11 -t

Pinging 60.0.0.11 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
```

- 1.pocket reached in destination IP
- 2.reply packet does not return to come source IP
- 3.there is no system route table destination ip
4. so manually destination route to be added (50.0.0.0)

```
C:\Documents and Settings\user>route print
=====
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 86 5f 09 50 00 ..... Intel(R) PRO/1000 MT Network Connection - Pack
Scheduler Miniport
=====
Active Routes:
Network Destination        Netmask          Gateway          Interface        Metric
50.0.0.0                    255.0.0.0        60.0.0.1         60.0.0.11        1
60.0.0.0                    255.0.0.0        60.0.0.11        60.0.0.11        10
60.0.0.11                   255.255.255.255  127.0.0.1        127.0.0.1        10
60.255.255.255             255.255.255.255  60.0.0.11        60.0.0.11        10
127.0.0.0                   255.0.0.0        127.0.0.1        127.0.0.1        1
224.0.0.0                   240.0.0.0        60.0.0.11        60.0.0.11        10
255.255.255.255            255.255.255.255  60.0.0.11        60.0.0.11        1
=====
Persistent Routes:
None

C:\Documents and Settings\user>ping 50.0.0.11

Pinging 50.0.0.11 with 32 bytes of data:

Reply from 50.0.0.11: bytes=32 time=1ms TTL=127
Reply from 50.0.0.11: bytes=32 time=1ms TTL=127
Reply from 50.0.0.11: bytes=32 time=1ms TTL=127
Reply from 50.0.0.11: bytes=32 time=1ms TTL=127

Ping statistics for 50.0.0.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Documents and Settings\user>
```

```
C:\WINDOWS\system32\cmd.exe
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\user>route print
=====
Interface List
0x1 ..... MS TCP Loopback interface
0x2 ...50 fe 9c 09 4f 00 ..... Intel(R) PRO/1000 MT Network Connection - Packet
Scheduler Miniport
=====
Active Routes:
Network Destination        Netmask          Gateway           Interface        Metric
50.0.0.0                   255.0.0.0        50.0.0.11        50.0.0.11        10
50.0.0.11                 255.255.255.255  127.0.0.1        127.0.0.1        10
50.255.255.255            255.255.255.255  50.0.0.11        50.0.0.11        10
60.0.0.0                   255.0.0.0        50.0.0.1         50.0.0.11        1
127.0.0.0                  255.0.0.0        127.0.0.1        127.0.0.1        1
224.0.0.0                  240.0.0.0        50.0.0.11        50.0.0.11        10
255.255.255.255          255.255.255.255  50.0.0.11        50.0.0.11        1
=====
Persistent Routes:
None

C:\Documents and Settings\user>ping 60.0.0.11

Pinging 60.0.0.11 with 32 bytes of data:

Reply from 60.0.0.11: bytes=32 time=1ms TTL=127
Reply from 60.0.0.11: bytes=32 time=1ms TTL=127
Reply from 60.0.0.11: bytes=32 time=1ms TTL=127
Reply from 60.0.0.11: bytes=32 time=1ms TTL=127

Ping statistics for 60.0.0.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Documents and Settings\user>
```