

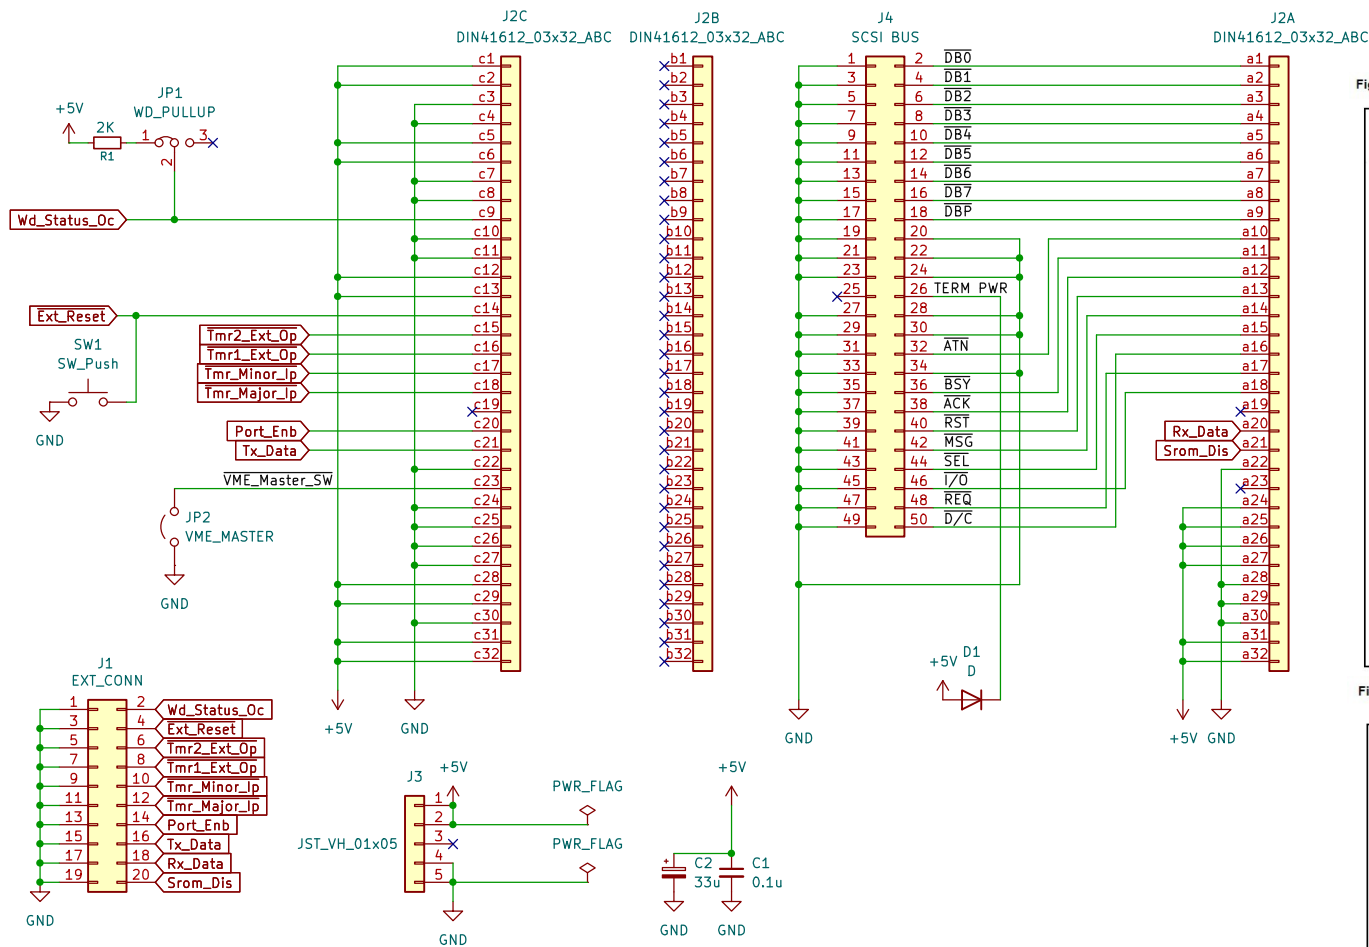


Figure 1-81 AXPvme Dual-Slot Breakout J2 Connector Pinout


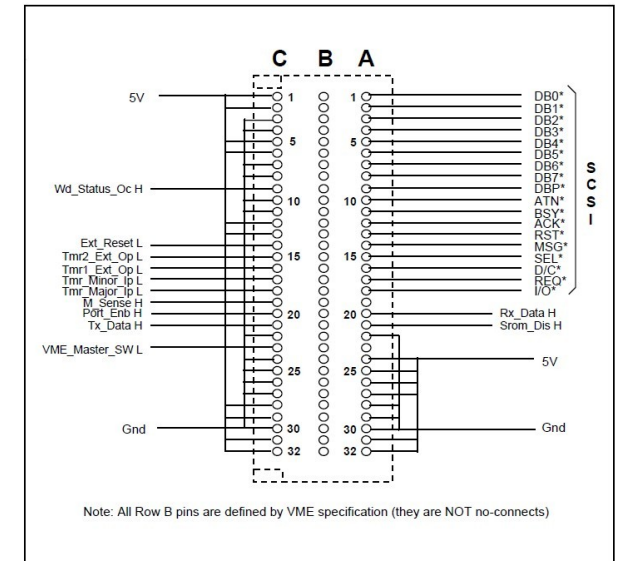


Figure 1-80 AXPvme Dual-Slot Breakout Detail

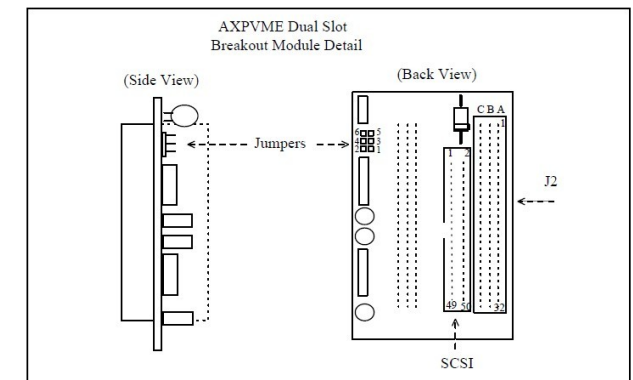

[SCSI commands]
 (Pin No : Signal nameの順)
 1, 3, 5, 7, 9, 11, 13, 15, 17, 19, 20, 21, 22, 23, 24, 27, 28, 29, 30, 31, 33, 34, 35, 37, 39, 41, 42, 45, 47, 49: GND (Ground)
 2: /DB0 (Data bus bit 0)
 4: /DB1 (Data bus bit 1)
 6: /DB2 (Data bus bit 2)
 8: /DB3 (Data bus bit 3)
 10: /DB4 (Data bus bit 4)
 12: /DB5 (Data bus bit 5)
 14: /DB6 (Data bus bit 6)
 16: /DB7 (Data bus bit 7)
 18: /DBP (Data bus parity)
 25: nc (Not connected)
 26: TERM PWR (Terminator power)
 32: /ATN (Attention indicator)
 36: /BSY (Busy signal)
 38: /ACK (Acknowledge)
 40: /RST (SCSI bus reset)
 42: /MSG (Message phase)
 44: /SEL (SCSI select)
 46: /I/O (SCSI input/output)
 48: /REQ (Access request)
 50: /C/D (Control signals or data on the SCSI bus)

TMR1_EXT_OP L = P2 pin C16 (Timer #1 output)
 TMR2_EXT_OP L = P2 pin C15 (Timer #2 output)
 TMR_MINOR_IP L = P2 pin C17 (Timer #0 clock input)
 TMR_MAJOR_IP L = P2 pin C18 (Timer #0 gate input)