




AESOLAR

since 2003

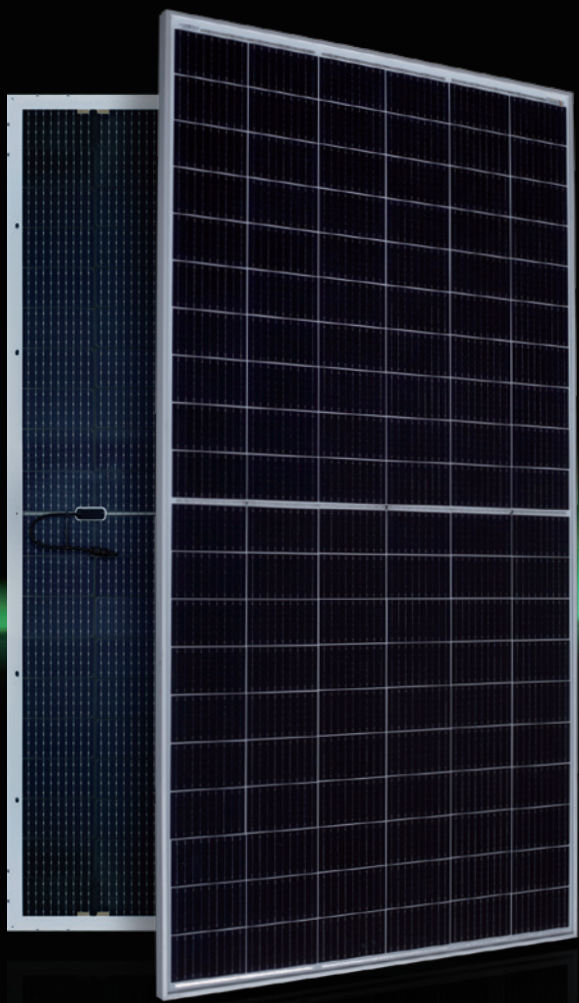

AURORA

HIGH ENERGY YIELD
RELIABILITY
DURABILITY

30

years

Performance
Warranty

15

years

Product
Warranty

360W-380W

AE MC-120BS Series

MONO-CRYSTALLINE PV MODULES
HALF-CUT CELLS • BIFACIAL • SINGLE-GLASS

www.ae-solar.com

Ver. 24.1.1



HALF
CELLS



CELL
SIZE



LID
RESISTANT



PID
RESISTANT



SALT CORROSION
RESISTANT



SAND
RESISTANT



AMMONIA
RESISTANT




HIGHLY STABLE
AND TOUGH



IEC 61215 IEC 61730
Regular Production Surveillance
www.tuv.com
ID 1111251295

IEC 62716 (Ammonia corrosion)
IEC 61701 (Salt mist corrosion)
IEC 60068 (Sand and dust)
IEC 62804 (PID resistance)



AE MC-120BS Series 360W-380W



MONO-CRYSTALLINE PV MODULES
HALF-CUT CELLS • BIFACIAL • SINGLE-GLASS

Mechanical and design specification




Cell type	Gallium-doped Mono c-Si PERC, Half-cut cells, 166 mm
No. of cells	120
Bifaciality	70 ± 5%
Front cover	3.2 mm glass, high transmission, AR coated, tempered
Encapsulation	EVA
Back cover	Transparent Backsheet
Junction box	IP68 rated, 3 Bypass Diodes
Frame	30 mm anodized Aluminium alloy
Cable	1 x 4 mm ² , 350 mm length or customized
Connectors	MC 4 / MC 4 compatible
Dimension	1754 mm x 1038 mm x 30 mm
Weight	18.6 kg
Hail resistance	Max. Ø 25 mm at 23 m/s
Wind load	2400 Pa or 244 kg/m ²
Snow load	5400 Pa or 550 kg/m ²

Packaging information

Packaging configuration	36 pcs / pallet
Loading capacity	936 pcs / 40 HQ
Size / Pallet	1790 mm x 1140 mm x 1150 mm
Weight	717 kg / pallet

Temperature ratings

Operating temperature	(°C)	-40 to +85
Temp.coefficient of P_{max}	(%/°C)	-0.35
Temp.coefficient of V_{oc}	(%/°C)	-0.286
Temp.coefficient of I_{sc}	(%/°C)	0.057
Nom. operating temp. NOCT	(°C)	45 ± 2

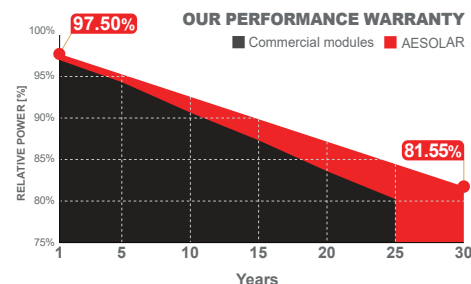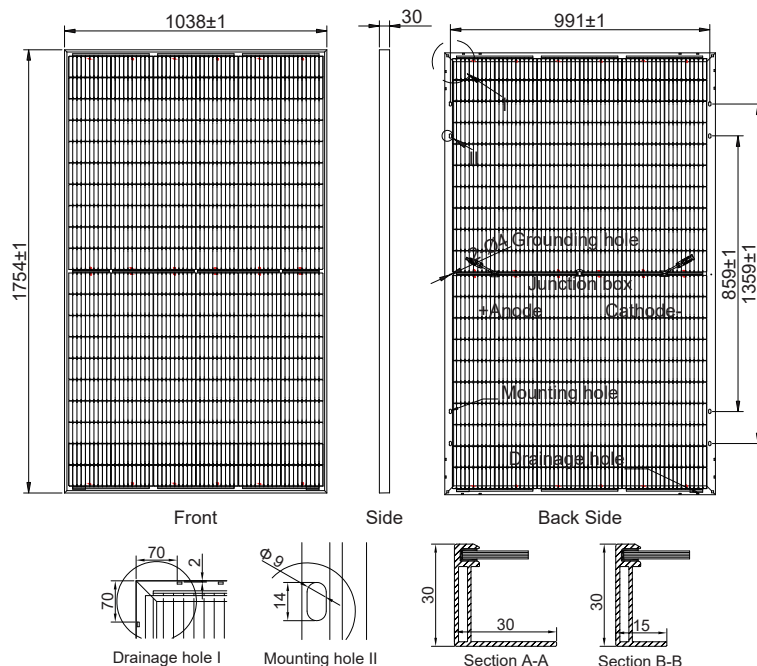

Electrical specifications (STC*): AE360MC-120BS AE365MC-120BS AE370MC-120BS AE375MC-120BS AE380MC-120BS

Nominal Max. Power	P_{max} (Wp)	360	365	370	375	380
Maximum operating voltage	V_{MPP} (V)	34.00	34.20	34.40	34.60	34.80
Maximum operating current	I_{MPP} (A)	10.59	10.67	10.76	10.84	10.92
Open-circuit voltage	V_{oc} (V)	40.90	41.10	41.30	41.50	41.70
Short-circuit current	I_{sc} (A)	11.40	11.50	11.60	11.70	11.80
Module efficiency	η (%)	19.77	20.05	20.32	20.60	20.87
Power tolerance	(W)	0~+5				
Maximum system Voltage	(V)	1500				
Maximum series fuse rating	(A)	20				

*STC: Standard test conditions (Irradiance 1000 W/m², Cell temperature 25°C and air mass of AM1.5), measurement tolerance P_{max} : ±3%

Electrical specifications (NMOT*): AE360MC-120BS AE365MC-120BS AE370MC-120BS AE375MC-120BS AE380MC-120BS

Nominal Max. Power	P_{max} (Wp)	271	275	279	283	287
Maximum operating voltage	V_{MPP} (V)	32.00	32.20	32.40	32.60	32.80
Maximum operating current	I_{MPP} (A)	8.47	8.54	8.60	8.67	8.74
Open-circuit voltage	V_{oc} (V)	38.50	38.70	38.90	39.10	39.30
Short-circuit current	I_{sc} (A)	9.12	9.20	9.28	9.36	9.44

*NMOT: Normal Module Operating Temperature (Irradiance 800 W/m², Ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices.
The specifications included in the datasheet are subject to change without prior notice.