

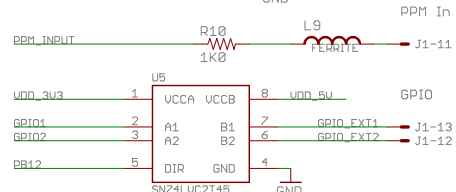
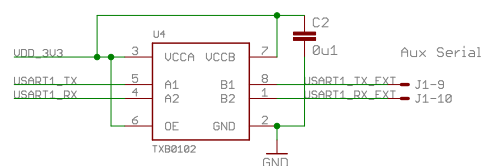
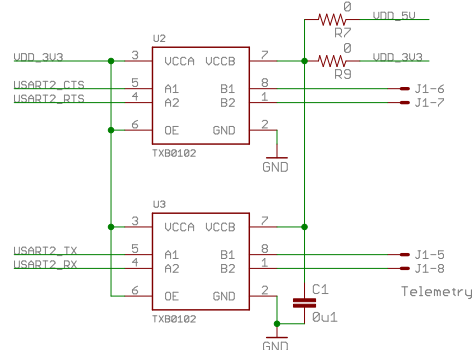



Telemetry serial voltage stuffing options: R16 = 5V R15 = 3.3V

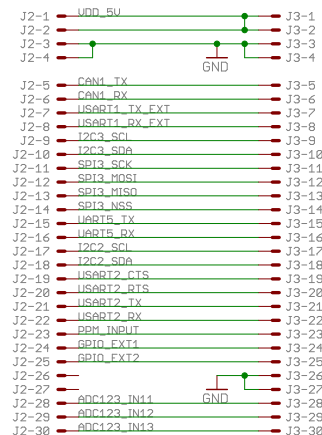



Note: Consider NXP 74AUC2T45 (50mA) instead of SN74LUCT2T25 (25mA)

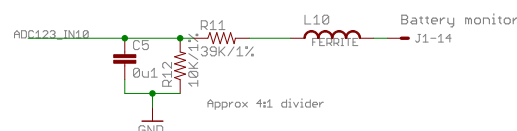

Note no pullups for I2C3, use weak pulldown on I2C3 pins to detect pullups on EXP board.

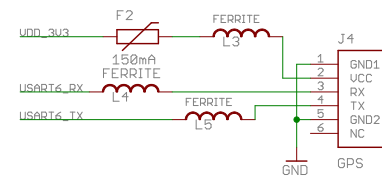

GPS voltage stuffing options: R17 = 5V R18 = 3.3V

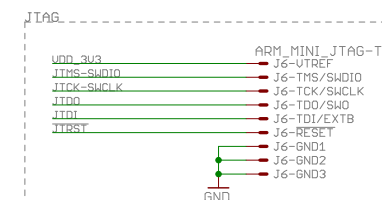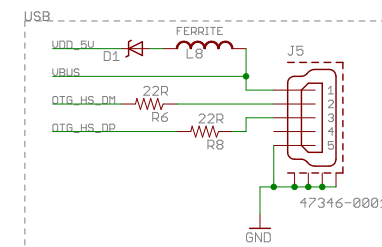

Ports and Connectors
BB
01.03.11 12:07
Sheet: 1/3



