






2022 COLLECTION

There are no
limits to space,
there are no
limits to design.

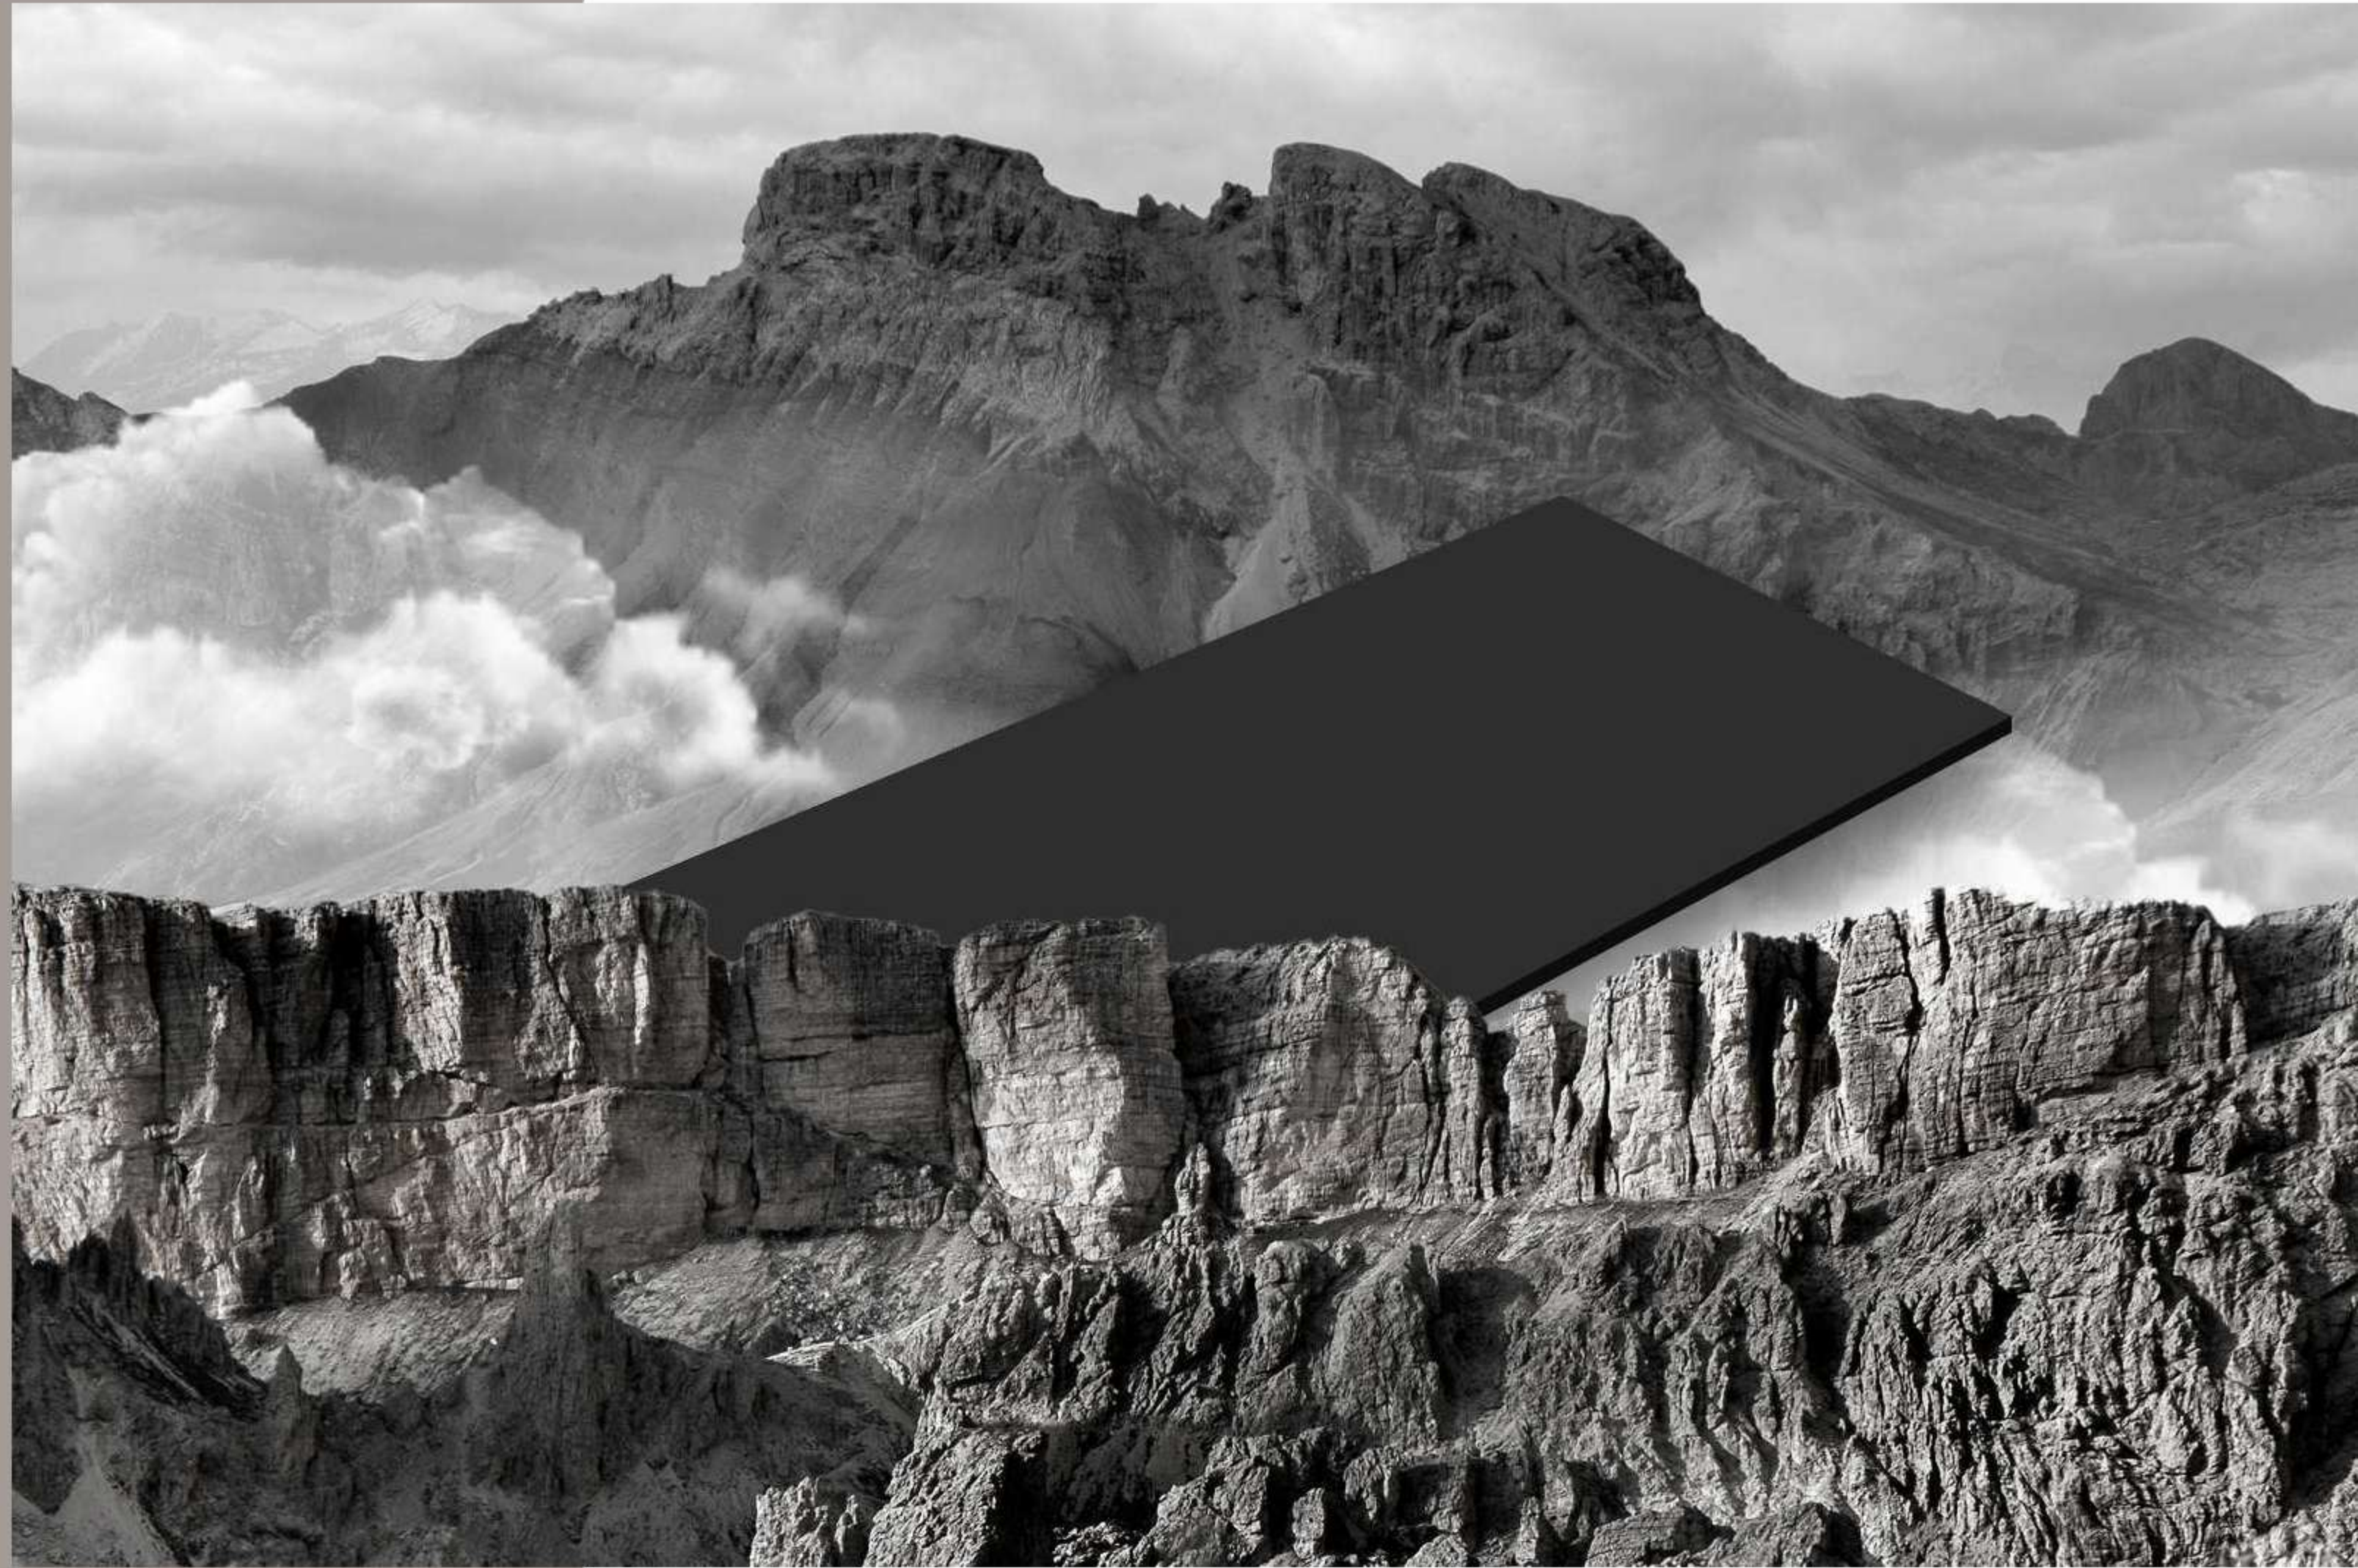

Exemplify
the flair
of artistry
at your
routine



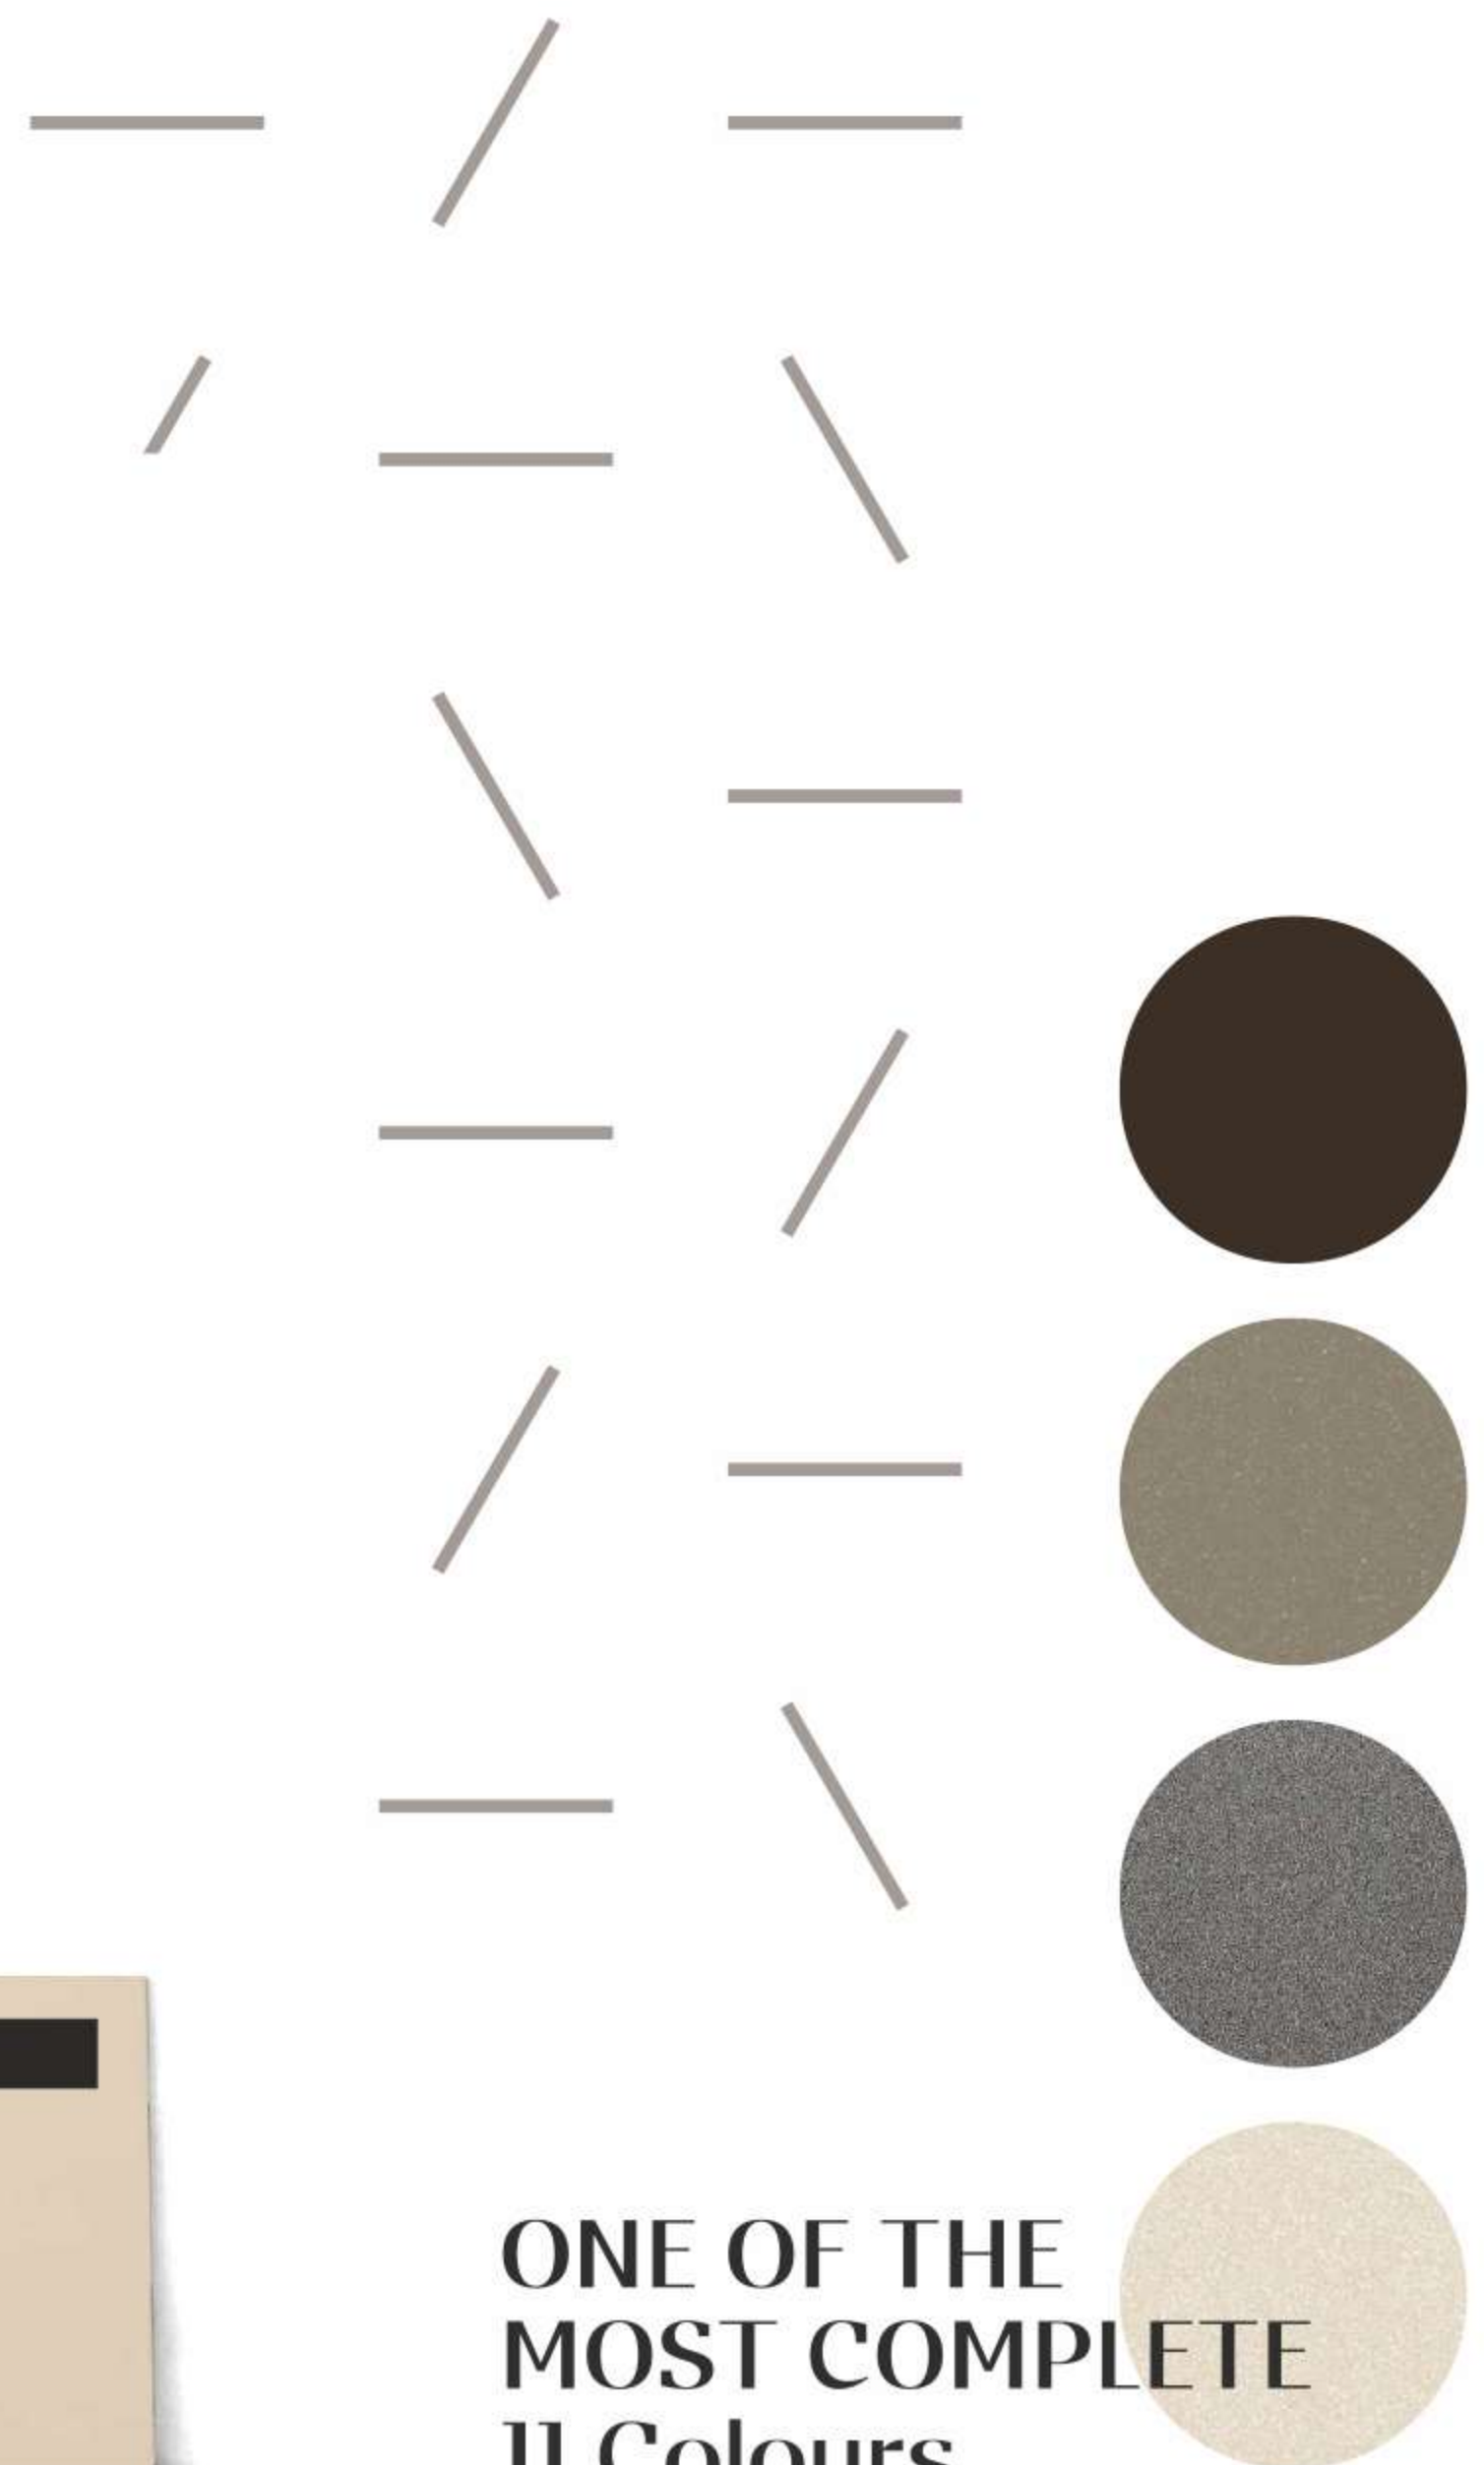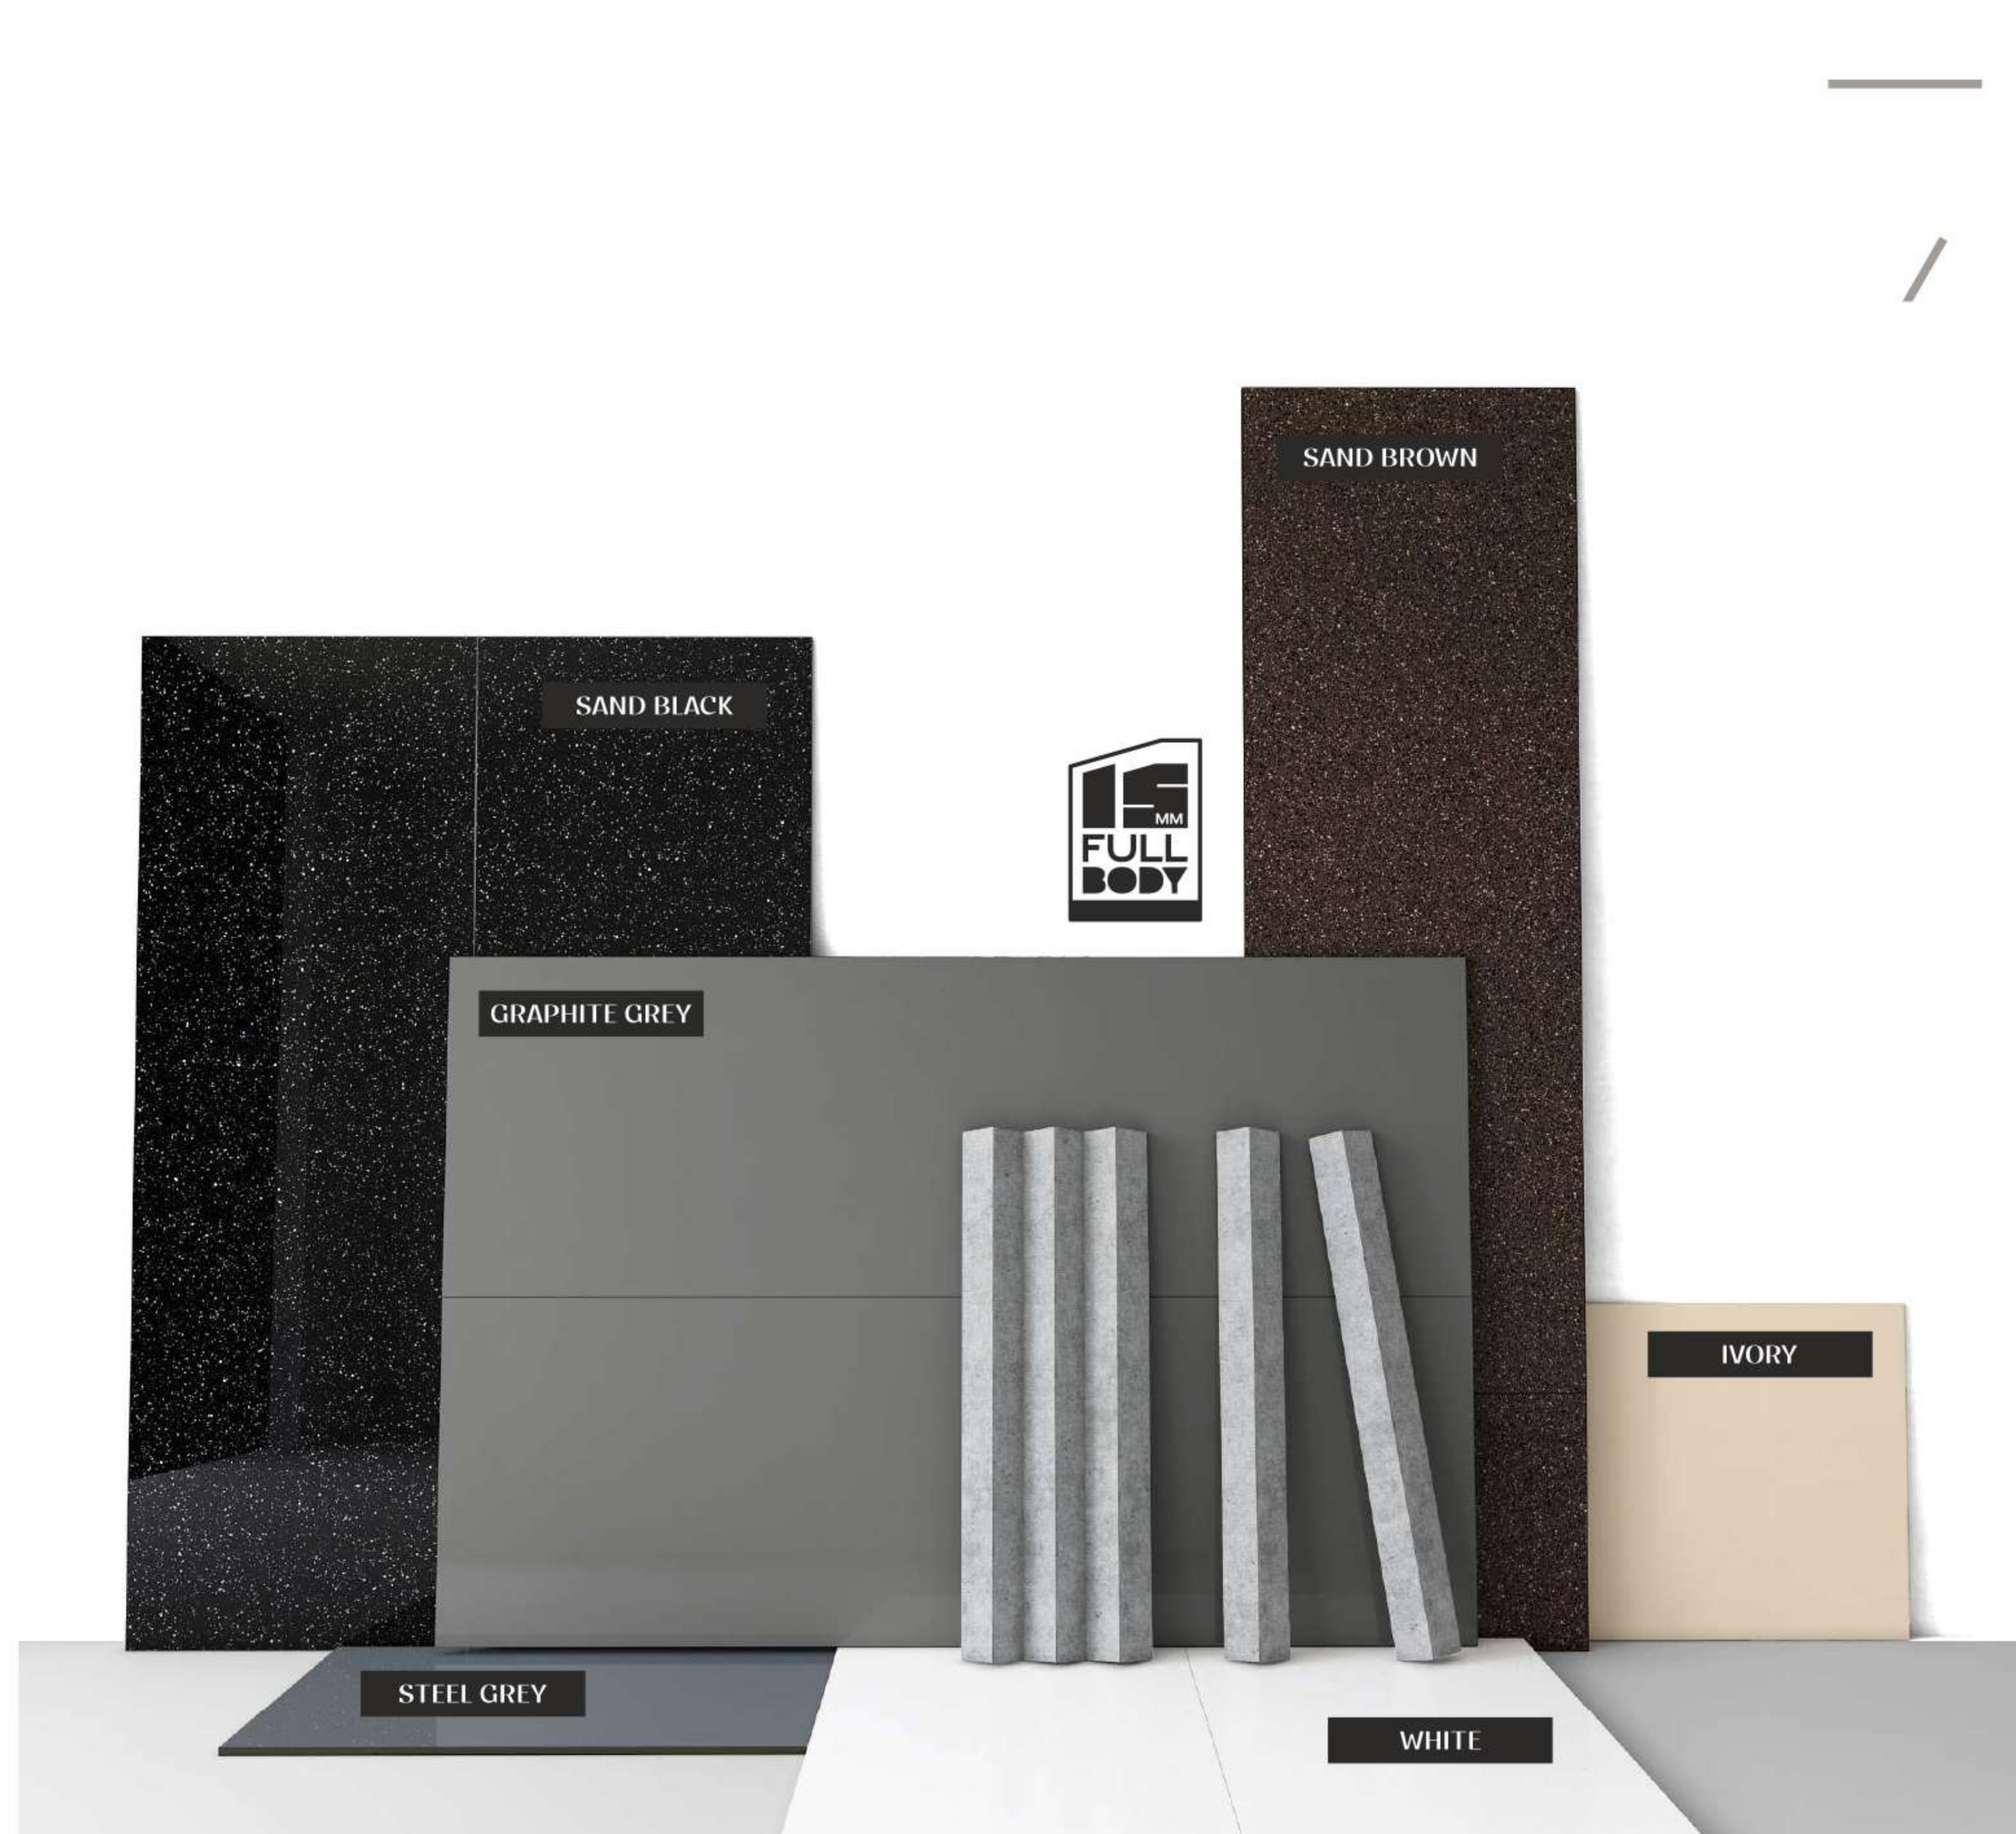

ONE OF THE
MOST COMPLETE
11 Colours
RANGE OF
FULLBODY
ON THE MARKET

Instill the verve and vivacity of details

There are so many materials inspirations and colours to be combined, and the results are original and surprising every time. Tiles with marble, concrete, stone effects can easily be combined with no laying difficulties.

**80X
240
CM**



There are no
limits to space,
there are no
limits to design.

Features



Lowest maintenance



Antibacterial surface



Water resistant



Impact resistant



Frost resistant



Scratch resistant



Stain resistant



Fire resistant



Heat resistant



Resistant to bending

15^{MM}
THICKNESS



Application



Kitchen countertop



Dining table



Table top



Door and window frame



Shelves



Shower base



Vanity top



Wash basin






Staircase



Bathtub



Floor & Wall

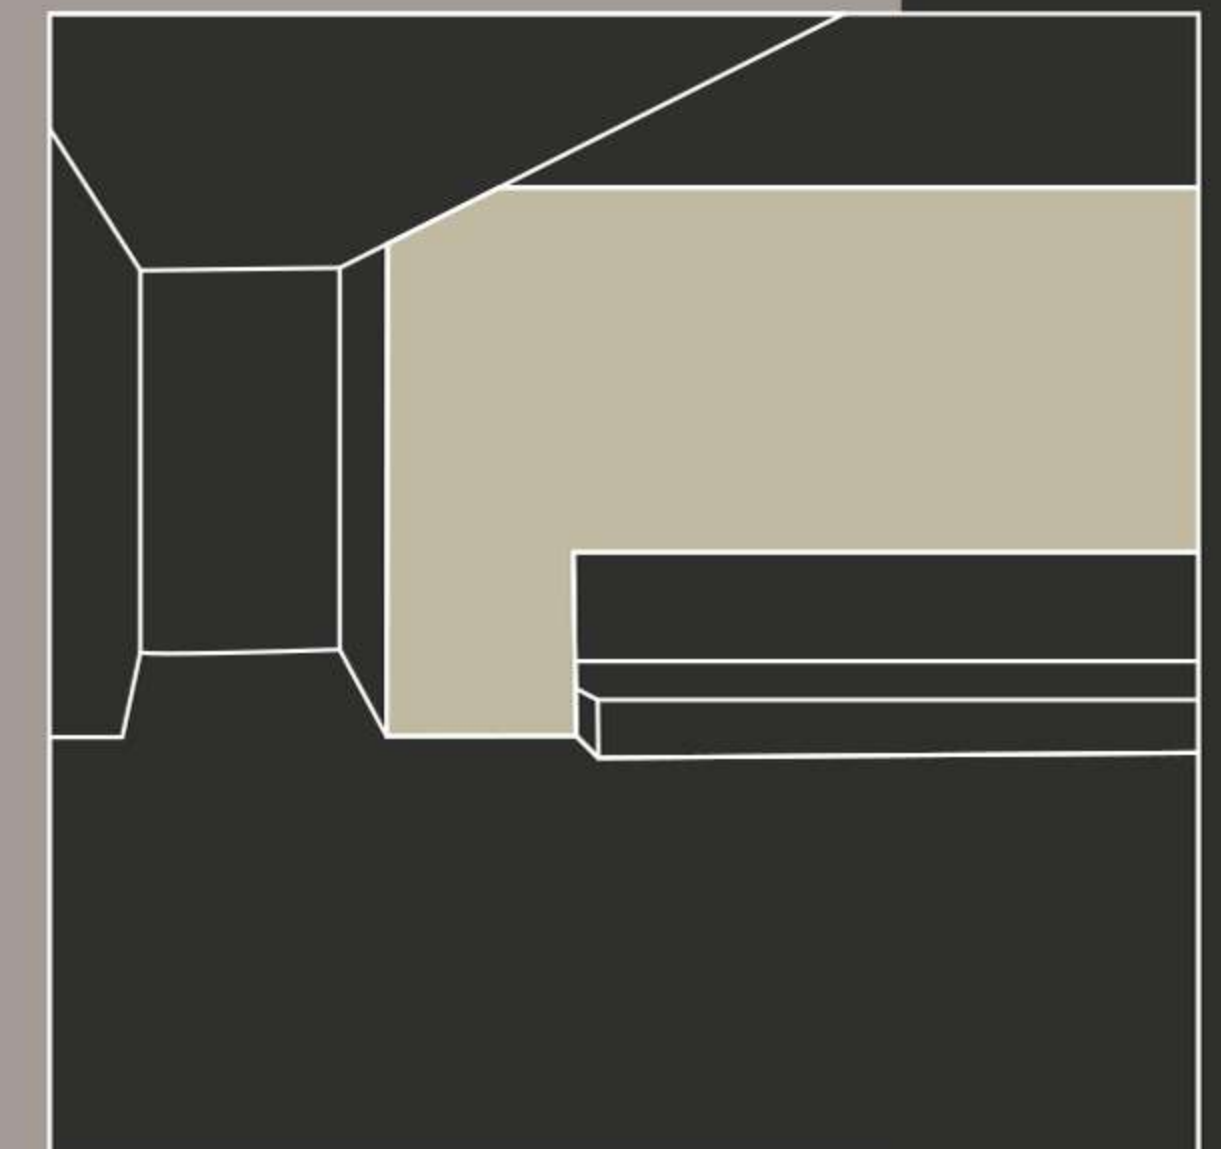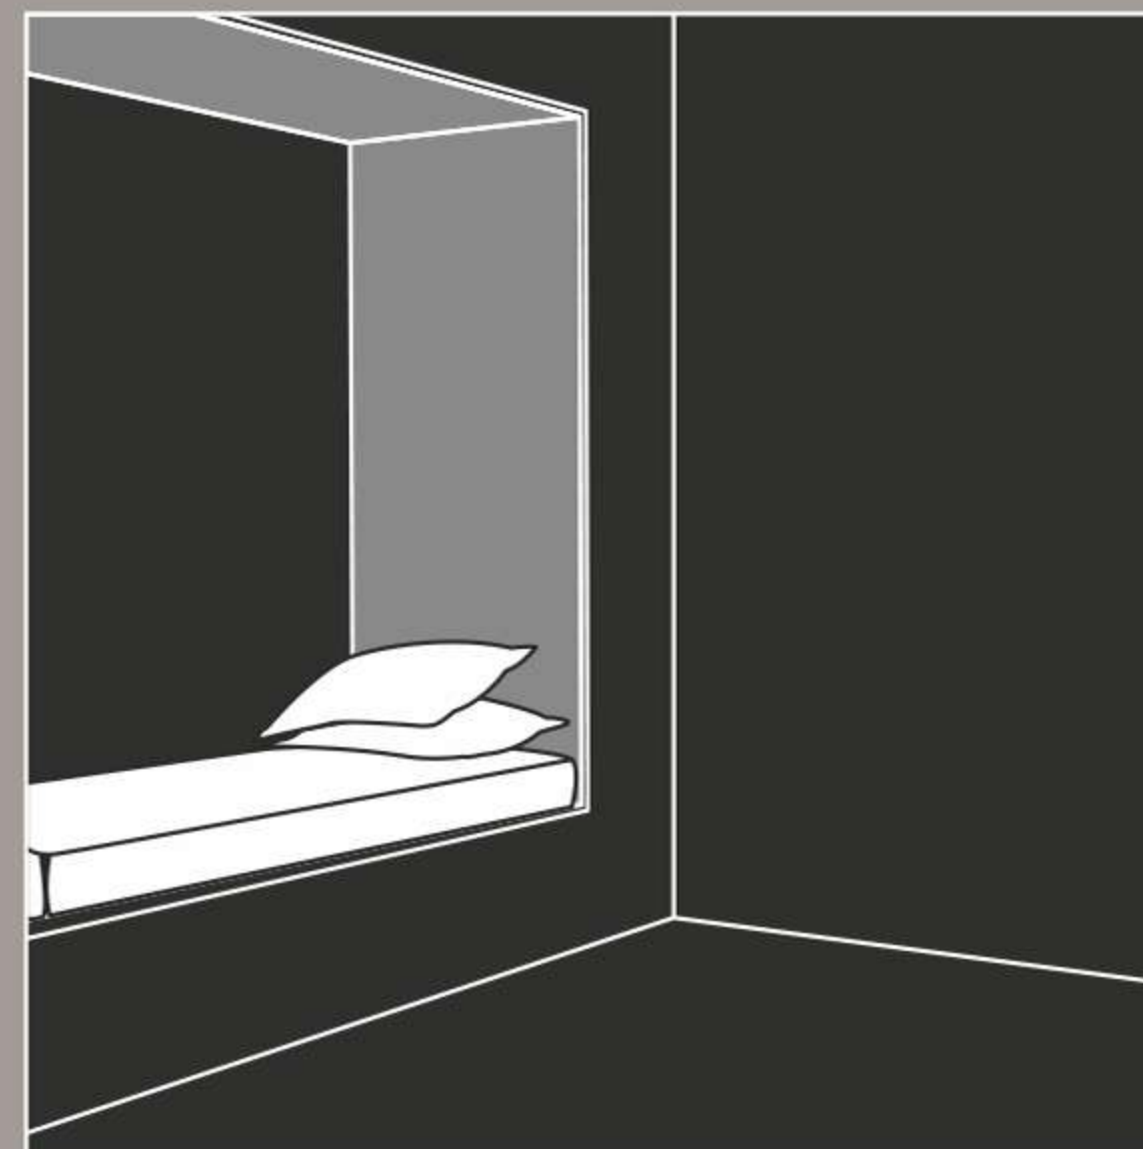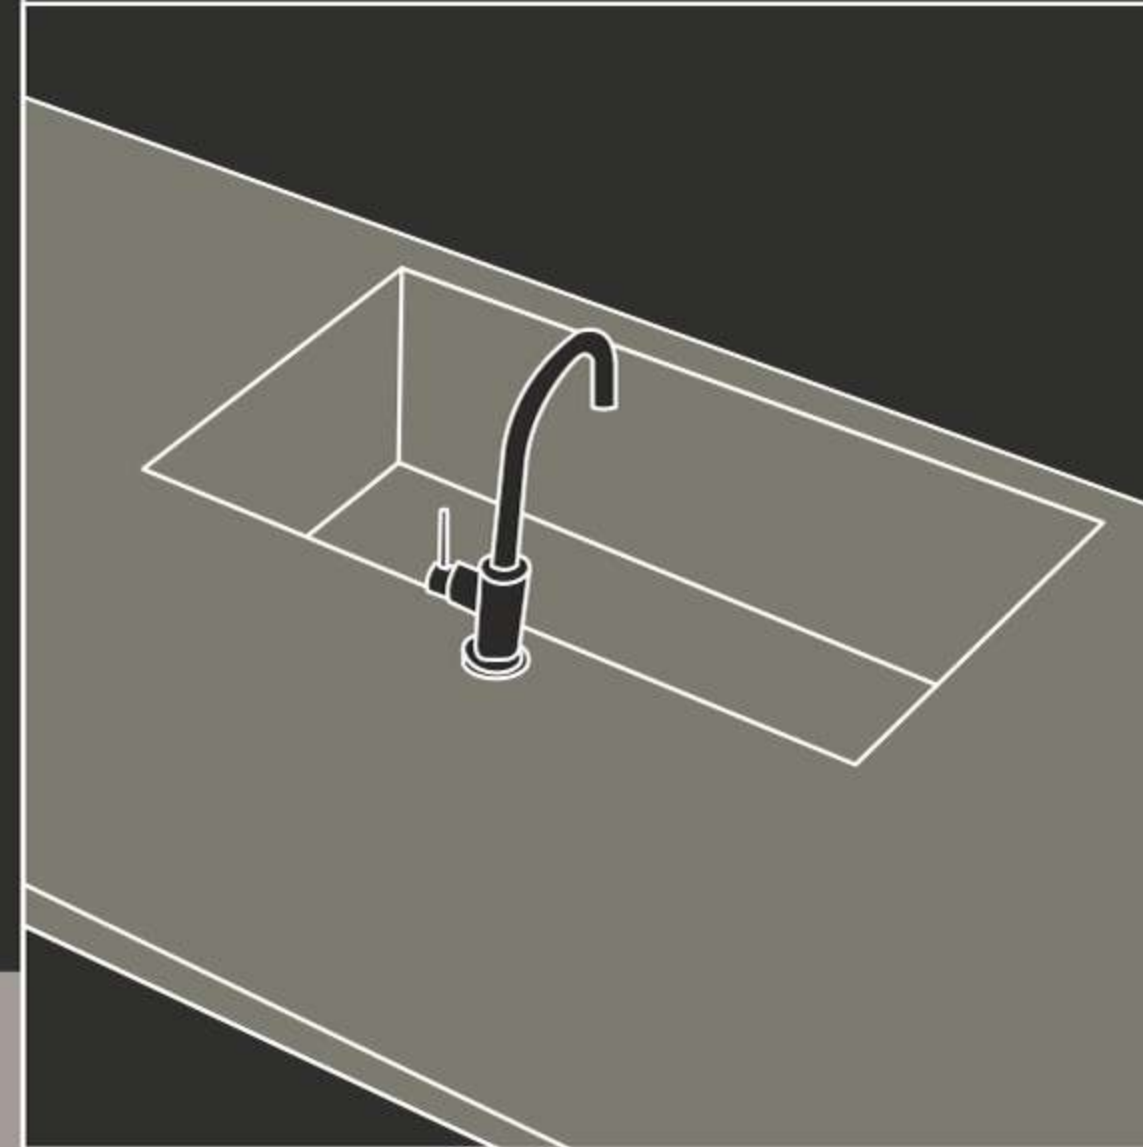

Edge Profiles



Micro bevel



Double straight
rounded edge



Straight squared edge



Rounded straight edge



Double straight
squared edge



Half bullnose



Rounded edge at 45°



Full bullnose



Squared edge at 45°



Demi bullnose

Joint Possibilities



Birds beak



45° corner



Soft corner

Black

Sand Black

-  Lowest maintenance
-  Antibacterial surface
-  Water resistant
-  Impact resistant
-  Frost resistant
-  Scratch resistant
-  Stain resistant
-  Fire resistant
-  Heat resistant
-  Resistant to bending



**800
X2400
MM**
80
X240
CM

FINISH
GLOSSY/MATT



Black

**FINISH
MATT**

Brown

Sand Brown

-  Lowest maintenance
-  Antibacterial surface
-  Water resistant
-  Impact resistant
-  Frost resistant
-  Scratch resistant
-  Stain resistant
-  Fire resistant
-  Heat resistant
-  Resistant to bending



**800
X2400
MM**
80
X240
CM

FINISH
GLOSSY/MATT












Sand Brown

FINISH
MATT

Graphite Grey

Steel Grey

Sand Grey

-  Lowest maintenance
-  Antibacterial surface
-  Water resistant
-  Impact resistant
-  Frost resistant
-  Scratch resistant
-  Stain resistant
-  Fire resistant
-  Heat resistant
-  Resistant to bending



**800
X2400
MM**
80
X240
CM

FINISH
GLOSSY/MATT



greffite Grey

FINISH
GLOSSY



Steel Grey

FINISH
MATT



Sand Grey

FINISH
MATT

Ivory

Sand Ivory

-  Lowest maintenance
-  Antibacterial surface
-  Water resistant
-  Impact resistant
-  Frost resistant
-  Scratch resistant
-  Stain resistant
-  Fire resistant
-  Heat resistant
-  Resistant to bending



**800
X2400
MM**
80
X240
CM

FINISH
GLOSSY/MATT



Sand Ivory

FINISH
GLOSSY





Ivory

FINISH
MATT

White

Sand White

-  Lowest maintenance
-  Antibacterial surface
-  Water resistant
-  Impact resistant
-  Frost resistant
-  Scratch resistant
-  Stain resistant
-  Fire resistant
-  Heat resistant
-  Resistant to bending



**800
X2400
MM**
80
X240
CM

FINISH
GLOSSY/MATT



TECHNICAL SPECIFICATION

TEST DISCRPTION			
CHARACTERISTIC	TEST METHOD	STANDARD VALUE	VALUES
Deviation in Length	ISO 10545-2	3 1 mm	Ave. + 0.28 mm Ave. - 0.00 mm
Deviation in Width	ISO 10545-2	31 mm	Ave. + 0.21 mm Ave. - 0.00 mm
Deviation in Thickness	ISO 10545-2	3 0.5 mm	Ave. + 0.00 mm Ave. - 0.16 mm
Straightness of Sides	ISO 10545-2	3 0.8 mm	Max. + 0.18 mm Max. - 0.20 mm
Rectangularity	ISO 10545-2	3 0.8 mm	Max. + 0.20 mm Max. - 0.22 mm
Surface Flatness	ISO 10545-2	3 1.8 mm	Max + 0.14 mm Max - 0.00 mm
Surface Quality	ISO 10545-2	Min. 95%	Min. 99%
PHYSICAL PROPERTIES			
CHARACTERISTIC	TEST METHOD	STANDARD VALUE	VALUES
Water Absorption	ISO 10545-3	0.50%	Avg. 0.0606 %
Modulus of Rapture(N/mm2)	ISO 10545-4	min 35	Avg. 43.11 N/mm2
Breaking Strength(N)	ISO 10545-4	>7.5mm	6270,45 N
THERMAL SHOCK RESISTANCE 15/145.C 10cycle	ISO 10545-9	10 cycle, Min	Conform
Co-Efficent of Linear Thermal Expansion	ISO 10545-8	9x10 6 Max	4,84x10 6
Deep Abrasion Resistance	ISO 10545-6	Max 175mm	123mm3
Scratch Hardness of Surface	Is-13630-13	Min 5 Moh's	5 Moh's Scal
Bulk Density (g/cc)		2.2 Min	2.2748g/cc
Moisture Expansion(mm/m)	ISO 10545-10	0.02mm/m max	No Expansion
Impact Resistance-Coefficient of Restitution	ISO 10545-5	0.55 Min.	0.57 Min
Small Colour Differences	ISO 10545-16		No Difference
Resistance to Stain	ISO 10545-14	Min Class-3	Class-5
Lead and Cadium Release in mg/dm2	ISO 10545-15	0.1mg/dm2	0.00mg/dm2

PACKING DETAIL				
SIZE	THICKNESS	NO. OF SLAB/BOX	WEIGHT/BOX	COVERAGE AREA
80x240 cm	1.5 cm	1 Pcs.	70 KG (approx)	20.66 Sq.ft.



ZEBBOI

Witness The Grandeur