

Smoke Detection with Fire Prevention

Submitted in partial fulfilment of the requirements

of the degree of

Bachelor of Engineering (B.E.)

by

Komal Darji 60003160012

Sagar Darji 60003160013

Monil Diwan 60003160014

Karan Doshi 60003160015

Project Guide

Prof. Yukti Bandi



(Information Technology)
Dwarkadas J. Sanghvi College of Engineering
University of Mumbai
2019-2020



Shri Vile Parle Kelavani Mandal's

DWARKADAS J. SANGHVI COLLEGE OF ENGINEERING

(Autonomous College Affiliated to the University of Mumbai)

NAAC Accredited with "A" Grade (CGPA : 3.18)



CERTIFICATE

This is to certify that the project entitled **“Smoke Detection with Fire Prevention”** is a bona fide work of **“Komal Darji (60003160012), Sagar Darji (60003160013), Monil Diwan (60003160014), Karan Doshi (60003160015)”** submitted to the University of Mumbai in partial fulfilment of the requirement for the award of the degree of **“Bachelor Of Engineering”** in **“Information Technology”**.

Guide
(Prof. Yukti Bandi)

Head of Department
(Dr. Vinaya Sawant)

Principal
(Dr. Hari Vasudevan)



Shri Vile Parle Kelavani Mandal's

DWARKADAS J. SANGHVI COLLEGE OF ENGINEERING

(Autonomous College Affiliated to the University of Mumbai)

NAAC Accredited with "A" Grade (CGPA : 3.18)



Project Report Approval for B. E.

This project report entitled **Smoke Detection with Fire Prevention** by **Komal Darji (60003160012)**, **Sagar Darji (60003160013)**, **Monil Diwan (60003160014)** and **Karan Doshi (60003160015)** is approved for the degree of Information Technology.

Examiners:

1.-----

2.-----

Date:

Place:



Declaration

We declare that this written submission represents our ideas in our own words and where others' ideas or words have been included, we have adequately cited and referenced the original sources. We also declare that we have adhered to all principles of academic honesty and integrity and have not misrepresented or fabricated or falsified any idea/data/fact/source in our submission. We understand that any violation of the above will be cause for disciplinary action by the Institute and can also evoke penal action from the sources which have thus not been properly cited or from whom proper permission has not been taken when needed.

Komal Darji (60003160012)

Sagar Darji (60003160013)

Monil Diwan (60003160014)

Karan Doshi (60003160015)

(Name of student and SAP IDs)

(Signature)

Date:

Acknowledgement

This project report consumed huge amount of work, research, passion and dedication. In performing this project, we had to take help and guidance of some respected people, who deserve our greatest gratitude.

We owe a profound gratitude to our project in-charge, Prof. Arjun Jaiswal, who not only introduced us to the methodology of work but also took a keen interest in our project and guided us all along.

In addition, we would also like to thank our respected Principal, Dr. Hari Vasudevan, and the Head of Department, Prof. Vinaya Sawant, for giving us the support and guidance to work on this report. We are also thankful to the college for providing us with the necessary resources and also many thanks to the staff of college for their valuable co-operation.

Lastly, we thank our classmates who made valuable suggestions which gave us an inspiration to improve our project. We thank them all for their help to complete the report. We express our gratitude towards the countless individuals who shared their knowledge and helped us in this report.

Abstract

Environment has been deeply harmed by humans since a great deal of time, but with the technological advancements we can try and heal it. Detection of fire in homes is necessary to avoid destruction of property due to fire accidents both natural and induced. Detection of fire can prove to be very important as it could mean the difference between life and death. Fires can occur from anywhere and at any point of time, hence the presence of Fire Alarm System helps in keeping your family safe. An automatic smoke detecting system will notify the individual as well as take necessary actions in the home in order to prevent the fire from spreading. It will help in detecting fire or smoke at an early stage and can help in saving lives. In our proposed system we are making use of Internet of Things as the technology and through a smoke sensor we will notify various home equipments to take appropriate actions in order to stop the fire from spreading. The system is beneficial as it not just buzzes an alarm but also alerts the home appliances to do as they are needed.

List of Figures

Figure 3.1. Smoke Detector.....	08
Figure 3.2. Smoke Detector on Rules.....	08
Figure 3.3. Smoke Detector off Rules.....	09
Figure 3.4. Devices in the System.....	09
Figure 4.1. Network Design (Before).....	11
Figure 4.2. Network Design (After).....	11
Figure 4.3. System Conditions based on Situation.....	14

List of Tables

Table 2.1. Project Implementation Schedule.....	05
Table 2.2. Timeline Chart.....	06
Table 5.1. Test Cases.....	16

Table of Contents

1. Analysis.....	01
1.1. Motivation.....	02
1.2. Problem Definition.....	02
1.3. Scope.....	02
2. Planning.....	03
2.1. Computing environment.....	04
2.2. Project implementation schedule.....	05
3. Design.....	07
3.1. Construction and Design	08
3.1.1. Navigation.....	08
3.1.2. Page Layout.....	08
4. Implementation.....	10
4.1. Network Design.....	11
4.2. Configuration.....	12
5. Testing and Deployment.....	15
6. Maintenance.....	17
7. References.....	19

Chapter 1

Analysis

1. Analysis

1.1. Motivation

Fire is very deadly and it leads to loss of human life and property. Fire detection systems are necessary to reduce the destruction of personal belongings and caused by fire both man made and induced. One of the most destructive properties of fire is that it spreads exponentially and with the right medium can spread uncontrollably. This is why timely detection of fire is necessary for avoiding a fire hazard. The Internet of Things is a collection of sensor, actuators, software, electronics embedded with home appliances, physical devices and vehicles which connect with each other to connect and exchange data which helps in increasing the efficiency of everyday appliances using computer-based systems.

1.2. Problem Definition

Fires cause serious damage and disrupts daily life in a devastating manner. Hence preventing them or reducing their effects is a top priority. Though there are many systems that have been created to tackle this problem, false alarms are a challenge that is yet to be avoided. Our model, using smoke sensors alerts all the home appliances so that they can take their appropriate actions. The appliances that will be alerted are doors, windows, sprinklers, garage doors etc.

1.3. Scope

Our model, consisting of the smoke sensor has been conditioned to a limit of 0.5; which implies that if the smoke level detected by the sensor reaches more than the level set, appropriate actions will be taken. This can be changes according to the desire of the individual, situation or surroundings. Furthermore, there are a limited set of appliances that are prompted by the smoke sensor; which can be changed. Windows, doors and garage doors open when the smoke level exceeds the given level. The sprinklers too start spraying water in order to prevent the spread of fire in the household.

Chapter 2

Planning

2. Planning

2.1. Computing Environment

Our Smoke detection and fire prevention project was implemented on Cisco-packet tracer for testing. Components used for our project are as follows:

- Home Gateway: A router that forwards the data to the server and the control information to the connected devices for alerting purposes and hence allows it to take necessary actions to extinguish the fire.
- Door: Affects Argon, Carbon Monoxide, Carbon Dioxide, Hydrogen, Helium, Methane, Nitrogen, O₂, Ozone, Propane, and Smoke. When the door is opened, those gases will decrease to a maximum of 2% in total change. When the door is opened, the rate of transference for Humidity and Temperature is increased by 25%. The rate of transference for gases is increased by 100%
- Smoke Detector: Detects Smoke. Alarm will go off when it detects the environment variable SMOKE at the level of 40%.
- Fire Sprinkler: Raises the water level. Affects Water Level at a rate of 0.1 cm per second. This is connected to the smoke detector.
- Siren: Makes a loud emergency noise when activated. It is activated when certain conditions are encountered.
- Garage Door: Affects Argon, Carbon Monoxide, Carbon Dioxide, Hydrogen, Helium, Methane, Nitrogen, O₂, Ozone, Propane, and Smoke. When the door is opened, those gases will decrease to a maximum of 4% in total change. When the door is opened, the rate of transference for Humidity and Temperature is increased by 50%. The rate of transference for gases is increased by 100%.
- Smartphone: This is the user interface that allows the user to know that a fire occurred at their place with the help of the application running on their smartphone and the amount of smoke generated and hence take necessary steps.
- Window: A window is an opening in a wall, door, roof or vehicle that allows the passage of light, sound, and sometimes air.

2.2. Project Implementation Schedule

Table 2.1. Project Implementation Schedule

Sr no.	Task Name	Duration	Start Date	End Date
1	Planning	15 days	10-01-2020	25-01-2020
2	Design	15 days	26-01-2020	11-02-2020
3	Implementation	45 days	12-02-2020	27-03-2020
4	Testing	13 days	01-04-2020	14-04-2020

The duration of the project was 15 weeks. So, the first two weeks were allocated for planning of the project. The planning included what topics to be covered and which components will be required for the project to be completed. Also, the flow of the tasks was also decided in the planning phase. Then, four weeks were allocated for the designing phase. In this phase, the architecture of the system was developed. We designed the architecture for our Wireless Network. The connection of the devices was drawn out visually. The next part was the implementation part to which we allocated 6 weeks. In the implementation part, we created our project in the Cisco Packet Tracer. We created a network and made the configurations as required. We had to make changes several times before we finally developed the complete system. The last three weeks were allocated for the testing of the developed system. In this phase, we created many test cases based on our system. These test cases were then checked in the system to get a result on whether the system is performing as desired or is there any malfunction. The test cases were covered for almost all the modules in the project.

Table 2.2. Timeline Chart

Months		January				February				March				April		
Weeks (no. of weeks)		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Planning	Requirement Analysis															
	Scope & Goals															
	Preparation of schedule															
Designing	Basic layouts design															
	Actual Network Design															
Implementation																
Testing																

Chapter 3

Design

3. Design

3.1. Construction and Design

3.1.1. Navigation

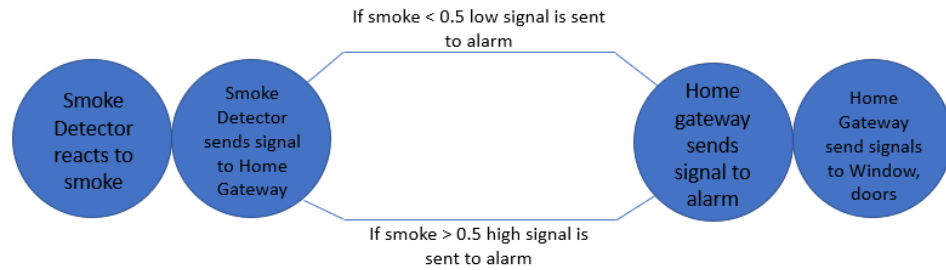


Figure 3.1. Smoke Detector

3.1.2. Page Layout

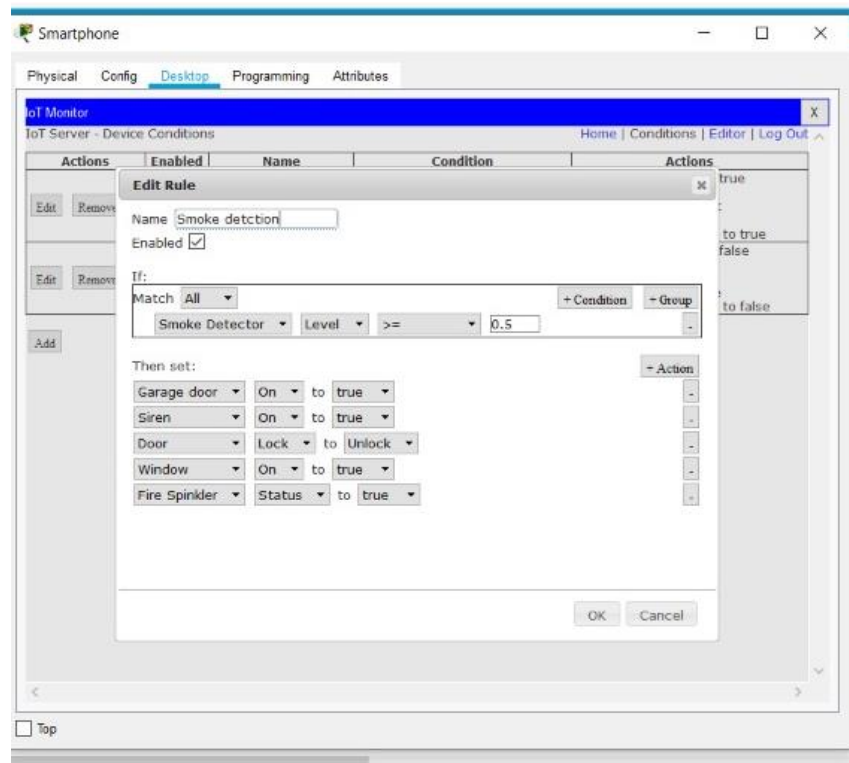


Figure 3.2. Smoke Detector On Rules

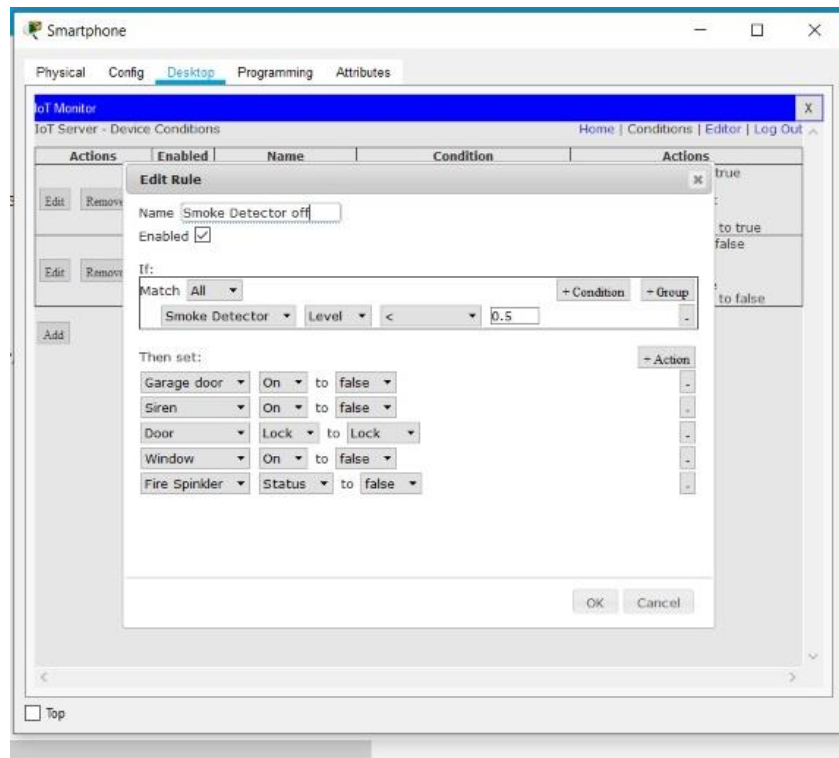


Figure 3.3. Smoke Detector Off rules

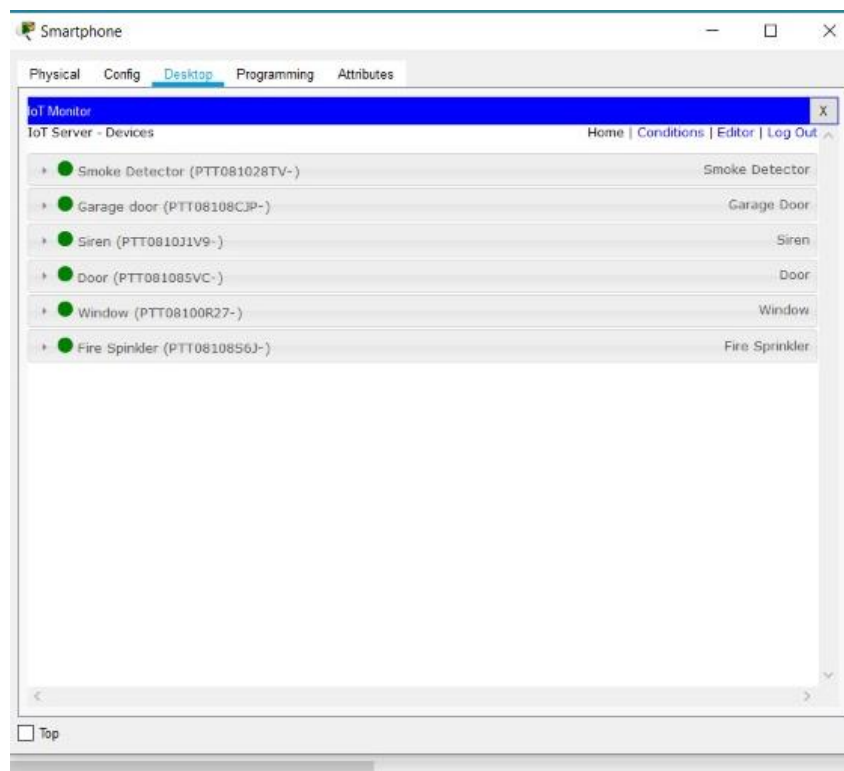


Figure 3.4. Devices in the system

Chapter 4

Implementation

4. Implementation

4.1. Network Design

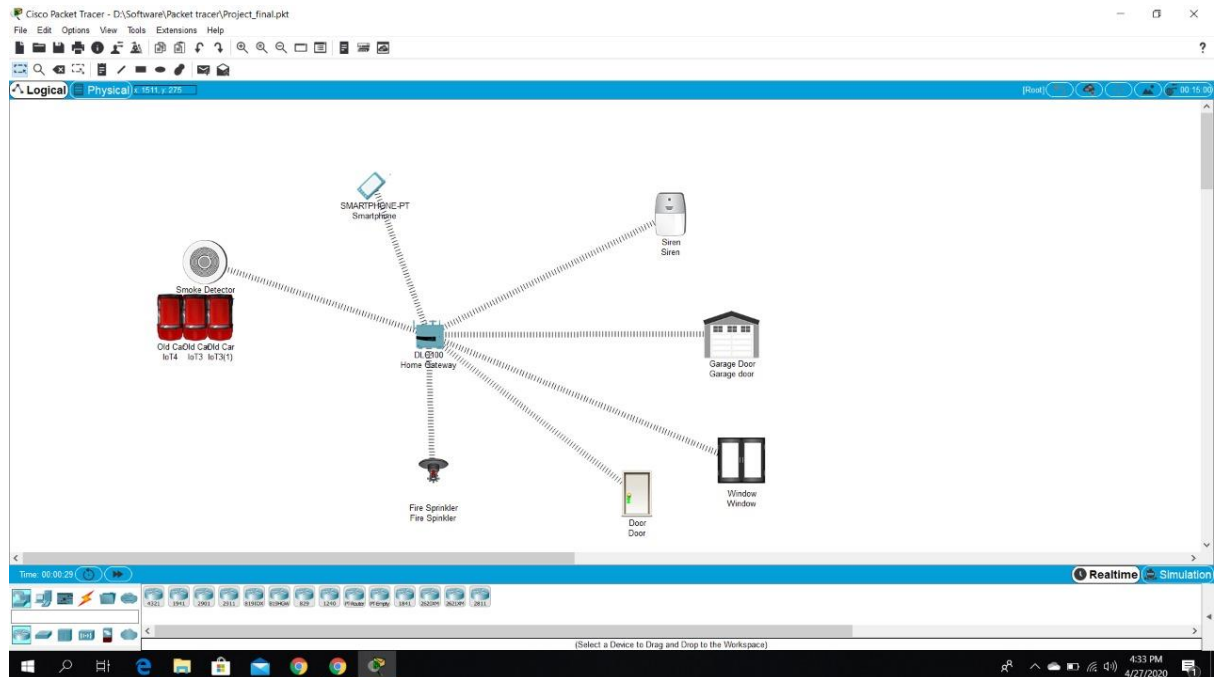


Fig 4.1. Network Design (Before)

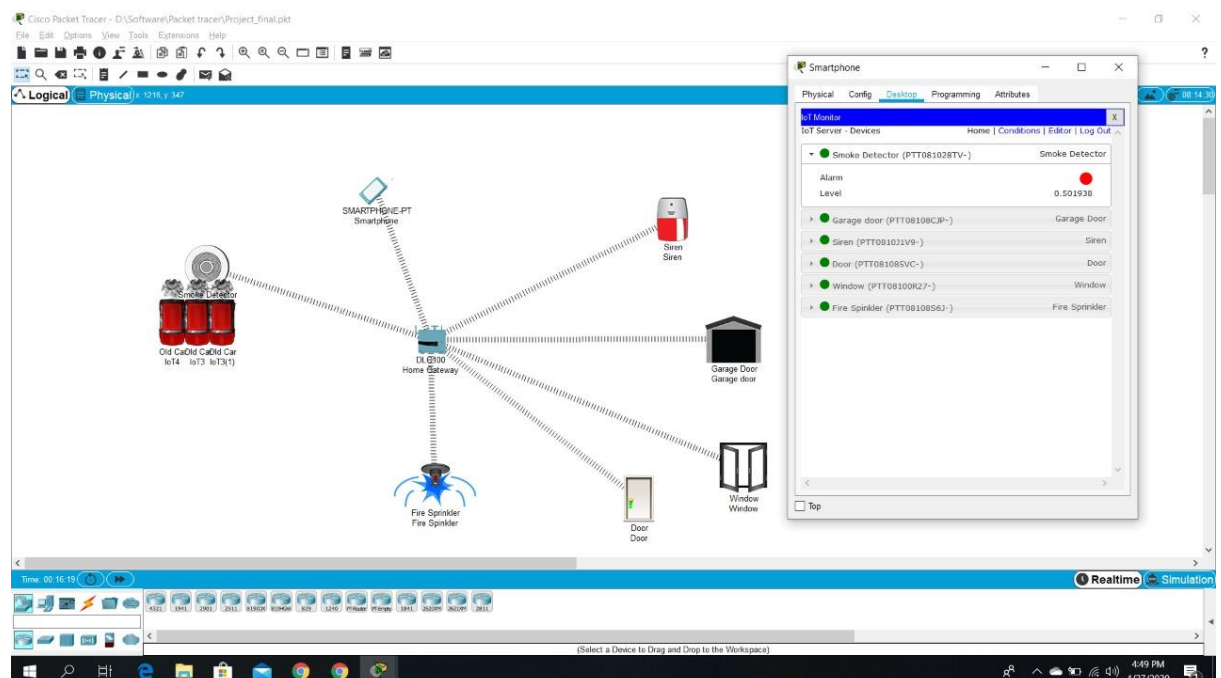


Fig 4.2. Network Design (After)

4.2. Configuration

1. DLC Home Gateway

- Created a web page with username and password to connect and gain control of the system.
- Registration can be done on this router.
- Range of the router is set to maximum (1000 meters or 1km).
- Ip address is assigned as 192.168.25.1 dynamically.

2. Smartphone

- Connect to the system by going to the web browser and entering the IP of the registration server and logging in using ID and Password.
- Ip address is assigned as 192.168.25.100 dynamically.

3. Smoke Detector

- Smoke Detector is used to detect any smoke. E.g. When a fire breaks out the smoke detector will detect it. And in our project when the smoke level goes beyond 0.5, certain conditions are triggered such as door, windows are opened and fire sprinkler and siren are turned on.
- It is connected to Home Gateway using advanced setting in I/O config i.e. (PT-IOT-NM-1W) network adapter setting.
- Dynamic IP address is assigned using DHCP.

4. Window

- A window is an opening in a wall that allows the passage of light, sound, and sometimes air.
- It is connected to Home Gateway using advanced setting in I/O config i.e. (PT-IOT-NM-1W) network adapter setting
- Dynamic IP address is assigned using DHCP

5. Door

- A door is an opening from where people can enter or leave in a normal routine life as well as in emergency.
- It is connected to Home Gateway using advanced setting in I/O config i.e. (PT-IOT-NM-1W) network adapter setting
- Dynamic IP address is assigned using DHCP

6. Garage door

- A Garage door is an opening from where vehicles can enter or leave. In our case this is very crucial as garage doors are huge and can help the air escape when there is a fire outbreak, releasing carbon dioxide and other

gases into the air and helping any people to take clean air if they are stuck in the house.

- It is connected to Home Gateway using advanced setting in I/O config i.e. (PT-IOT-NM-1W) network adapter setting
- Dynamic IP address is assigned using DHCP

7. Fire sprinkler

- The fire sprinkler sprays streams of water to suppress or extinguish the fire when ordered by the home gateway. This happens when smoke detector detects smoke level more than 0.5.
- It is connected to Home Gateway using advanced setting in I/O config i.e. (PT-IOT-NM-1W) network adapter setting
- Dynamic IP address is assigned using DHCP

8. Siren

- A siren is device which makes a loud emergency sound when the smoke detector detects smoke level greater than 0.5.
- It is connected to Home Gateway using advanced setting in I/O config i.e. (PT-IOT-NM-1W) network adapter setting
- Dynamic IP address is assigned using DHCP

9. Car

- In Cisco-packet tracer there is no object or entity which can simulate the generation of smoke other than a car.
- So, we have used 3 cars to represent smoke generation which is similar to smoke generated during fire.

Conditions:

To implement the project, we need to specify certain conditions on which all the devices can be activated and deactivated. Based on how and when these conditions change, there will be changes in the state of the devices. To simulate smoke, we have used 3 cars. The conditions which are mentioned above and are crucial for this simulation are as follows:

IoT Monitor				
IoT Server - Device Conditions			Home Conditions Editor Log Out	
Actions	Enabled	Name	Condition	Actions
<input type="button" value="Edit"/> <input type="button" value="Remove"/>	Yes	Smoke detction	Smoke Detector Level ≥ 0.5	Set Garage door On to true Set Siren On to true Set Door Lock to Unlock Set Window On to true Set Fire Spinkler Status to true
<input type="button" value="Edit"/> <input type="button" value="Remove"/>	Yes	Smoke Detector off	Smoke Detector Level < 0.5	Set Garage door On to false Set Siren On to false Set Door Lock to Lock Set Window On to false Set Fire Spinkler Status to false

Fig 4.3. System Conditions based on Situation

Chapter 5

Testing and Deployment

5. Testing and Deployment

Testing

Table 5.1. Test Cases

Test Case no.	Test Case	Expected Output	Actual Output	Result
1	When smoke detector detects smoke level > 0.5	Door open, window open, garage door open, sprinkler on, siren on.	Door open, window open, garage door open, sprinkler on, siren on.	Pass
2	When smoke detector detects smoke level < 0.5	Door close, window close, garage door close, sprinkler off, siren off.	Door close, window close, garage door close, sprinkler off, siren off.	Pass

Deployment

This system can be of great in domestic as well as industrial settings to detect smoke and alert people on an impending fire since smoke is a precursor for fire, instead of relying on heat/temperature sensors which sounds alarm when the fire has already started. This can go a long way in helping to save human life.

Chapter 6

Maintenance

6. Maintenance

User manual

1. All the components must be regularly checked for proper working.
2. Based on the condition set, check whether all devices are working.
3. The Home gateway is up all the time.
4. Smoke Detector should be able to detect presence of smoke all the time.

Chapter 7

References

7. References

- <https://www.packettracernetwork.com/internet-of-things/iot-advanced-programming.html>
- <https://www.packettracernetwork.com/internet-of-things/pt7-iot-devices-configuration.html>
- <https://www.theseus.fi/bitstream/handle/10024/150158/Andrea%20Finardi%20%20Master%20of%20Engineering%20%20Information%20technology.pdf?sequence=1&isAllowed=y>
- <https://www.youtube.com/watch?v=EmqOhV0vt4c>